

"A company that cares about Nature, People, & Technology"

DONG YANG

STEEL SERVICE GROUP

DongYang Standard Material





CEO MESSAGE

Dear Customers and Stockholders,
DongYang (Oriental) Steel Service Group, DongYang S.TEC, is a POSCO Steel Service Center.

DongYang S.TEC established SS division in Daejeon City of Choongnam province Korea, 2010. By that DongYang S.TEC now became to produce in a One-Stop-Service System such as from metal primary processing, small sub-parts for construction, and H-Beam manufacturing to assembly and Delivery so that we do make our customers have cost savings and solve many problems happened during their movement.

By establishing DYSM (DongYang Standard Material) in 2014 we set up a total production brand producing from primary process of metal products to the final end products by implementing an integrated system of design-development-manufacturing-sales of machines as well as producing multiple standard sheets & plates such as STEEL, SUS, AL, SKD, and so on.

We pledge customers and stockholders to devote ourselves to practicing our original management policy in order to go along with our social obligations by IPO in 2002. Lastly we expect persistent concerns and support from customers and stake holders.

Sincerely

Dong Yang Steel Service Group
CEO Cho Eun Koo

"A company that cares about Nature,
People, & Technology"

DONG YANG

STEEL SERVICE GROUP

CONTENTS

- 02 Greetings
- 04 Introduction to DYSM and History
- 05 New Normal Sheet & Plate
- 08 Facility
- 09 Products & Specifications





A company with the customer

We endeavor to create more value than ever through continuous enhancement of product performance, quality, and services.


| Quality | Speed | Satisfaction |



We are a company that produces and supplies "Standard Sheets & Plates" which are used for basic sub-parts of industrial machines and facilities. We are doing our best for the productivity enhancement and ultimate customers' cost savings by providing reasonable pricing and high precision products to our customers.

HISTORY

- 2015. 02. Opening of Osan Factory
- 2014. 09. Launching to build Osan Factory (Korea)
- 2014. 07. Establishment of DYSM Inc.

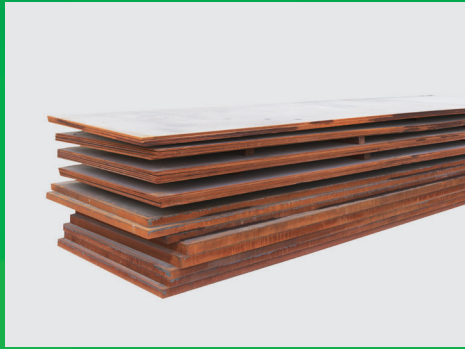

New Normal Sheet & Plate


Definition of New Normal Sheet & Plate

Plate stands for one of the mostly used basic components and a core metal processing material that is requisitely and generally used for all kinds of mechanical industries.

We call "New Normal Plate" as a customer centric standard type of delivery that was changed from the As-Was non-standard type of free plate by customer orders.

New Normal Sheets & Plates are flat steel components that were machined with standardized commercial specification so that they are used for industrial machines and devices such as mechanics, Electronics, Ship buildings, Automobiles, etc.

Background of New Normal Sheet & Plate


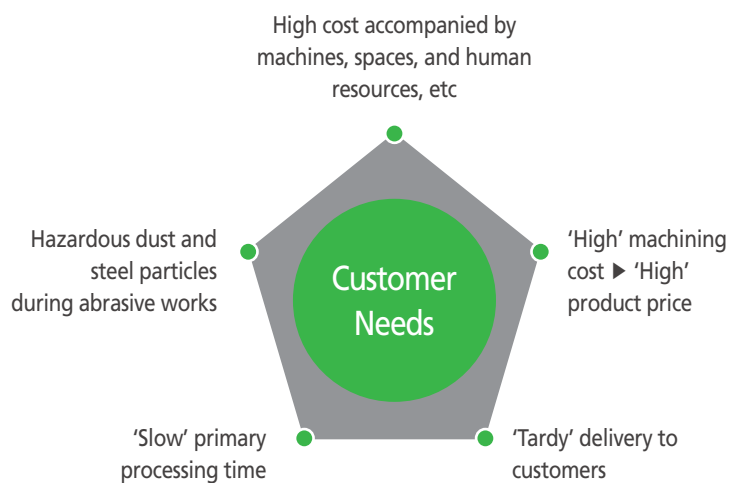


Many manufacturing companies using steels outsourced from domestic or abroad are having issues such as tardy delivery, high cost of machines, spaces, and workers, etc. It also causes dust and steel particles harmful to Workers.


This made us to start standard plate business so that we can meet customer needs by solving the primary steel processing with speedy and productive manner.

Why market needs standard products?

- 01** Former slow delivery
- 02** Domestic and overseas steel companies using steel components want to avoid dust and steel particles made from cutting and grinding in the steel Primary processing
- 03** Want to avoid high costs of machines, space, and craftsmen required to cutting and grinding works
- 04** Long lead time to finishing primary processing (Researching for raw steels ▶ Oxygen cutting ▶ cooling ▶ Movement ▶ Milling 6 edges × 6 processing
- 05** Cutting standard plate from racks by high speed cutter(finishing with just 1 process of tolerance within +0.15~-0.15mm and secured Milling surface finishing over (▽▽▽))
- 06** Price of standard sheets & plates is much cheaper than general non-standard components
- 07** Standard sheets and plates have a nice finishing design and quality

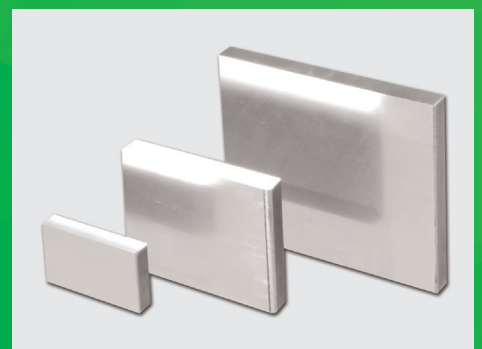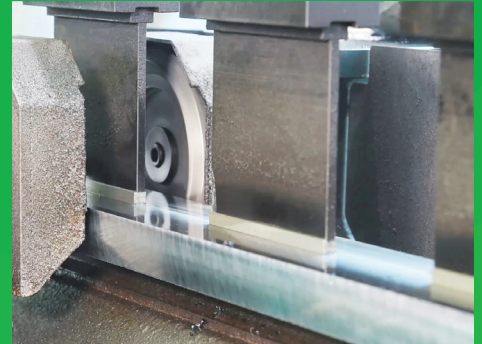

DYSM DISTRIBUTION STRUCTURE

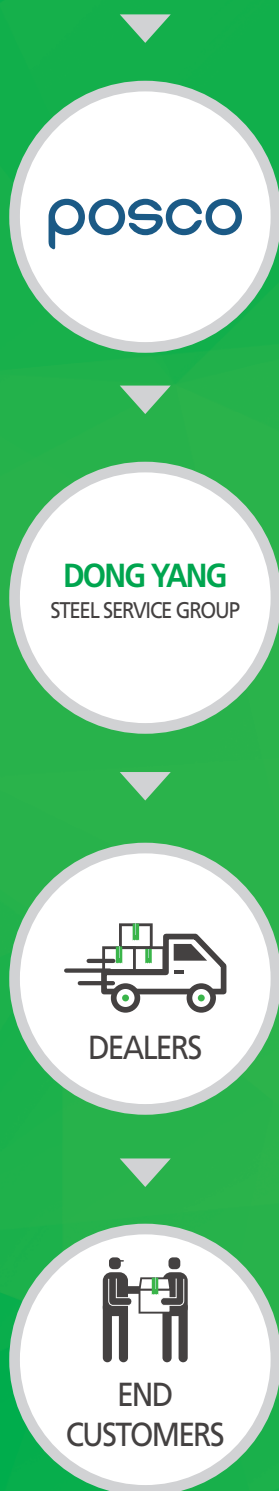

Core competency of New Normal Sheet & Plate

- 01** Facility cost savings by making local dealers do the machining by themselves with dedicated machines for sheet & plate
- 02** Production cost savings and speed enhancement
- 03** Enhance credibility by using WW No.1 steel company POSCO as a raw material
- 04** Speedy delivery
- 05** Minimize Steel Losses by using our STD Sheet & Plate with length of 1,524mm, also small products under 1,520mm are directly delivered to customers
- 06** Reduce distribution channels

Distribution Channel Structure of As-Was Market



Distribution Channel Structure of DYSM



FACILITY



Models for Sales

DYPC450T_Width400mm, Width 55T available ranges [5~55mm]

DYPC470T_width400mm, Width 55T available ranges [30~75mm]


Cutting Speed _MAX 600mm/Min

- 01** Easy cutting by standard plate specs based on wide ranges of customer orders and enjoy much flexibility to save remainder
- 02** Many advantages over spaces based on compact design
- 03** Enhance productivity by curtailing numeric control scale, sliding motions, and the control time
- 04** Enhance precision of length by adopting back-end digital scale

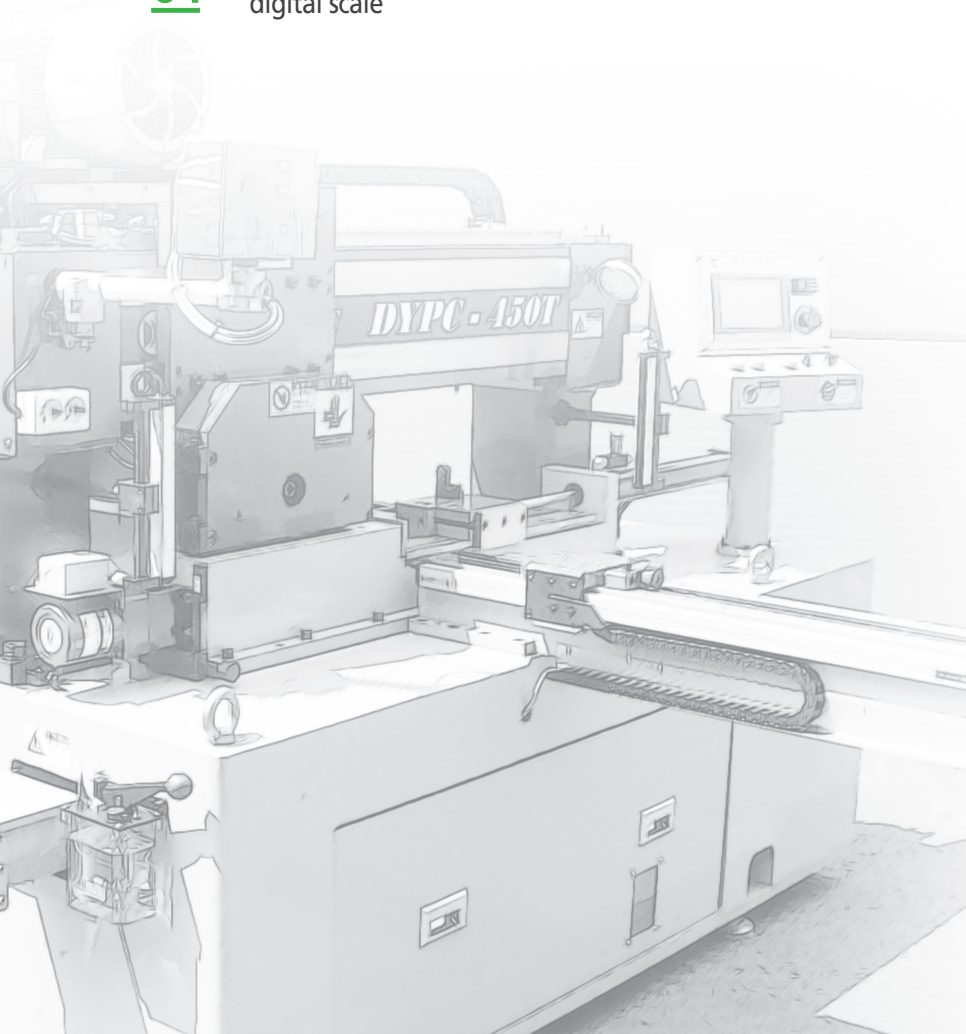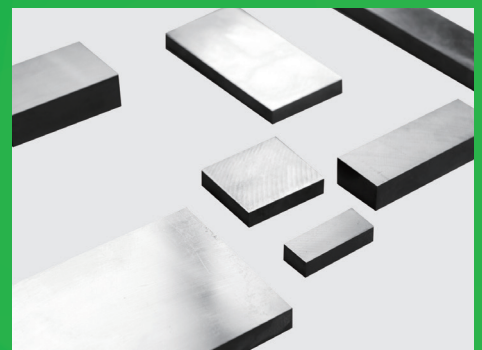

PRODUCTS LINE UP (Material Size)

DYSM is always trying to keep the Best Quality
Standard Material's Length is provided as 1,524mm

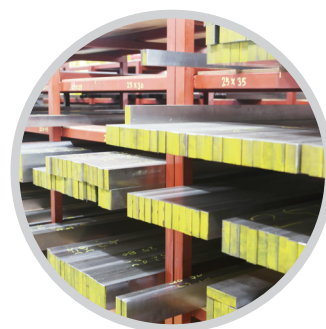

S45C Specification Sheet

Thickness (T)	Width (W)																	
6	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
8	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
9	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
11	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
12	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
13	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
14	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
15	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
16		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
18		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
19		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
20		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
22			25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
25			25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
28				30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
30				30	35	40	45	50	55	60	65	70	75	80	85	90	95	100
32					35	40	45	50	55	60	65	70	75	80	85	90	95	100
35					35	40	45	50	55	60	65	70	75	80	85	90	95	100
40						40	45	50	55	60	65	70	75	80	85	90	95	100
45							45	50	55	60	65	70	75	80	85	90	95	100
50								50	55	60	65	70	75	80	85	90	95	100
55									55	60	65	70	75	80	85	90	95	100
60										60	65	70	75	80	85	90	95	100
65											65	70	75	80	85	90	95	100
70												70	75	80	85	90	95	100



Order Type Material (S45C) Thickness(T)xWidth(W)xLength(L)xQty


Width (W)																			
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200					
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150										
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200					
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200					
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200					
105	110	115	120	125	130	135	140	145	150	160	170	180	190	200					
105	110	115	120	125	130	135	140	145	150										
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																
105	110	115	120																

DYSM is always trying to keep the Best Quality
Standard Material's Length is provided as 1,524mm



SS400 Specification Sheet

Thickness (T)	Width (W)																				
5	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100			
6	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
8		16	22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
		18	24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
9	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
10		16	22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
		18	24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
11	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
12		16	22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
		18	24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
13	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
14	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
15		16	22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
		18	24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
16		16	22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
		18	24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
18		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
19		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
20			22	26	32	36	42	46	52	56	62	66	72	76	82	86	92	96			
			24	28	34	38	44	48	54	58	64	68	74	78	84	88	94	98			
		20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
22			25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
24			25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
25			25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
28				30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
30				30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
32					35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
35					35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
40						40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
45							45	50	55	60	65	70	75	80	85	90	95	100	105	110	115
50								50	55	60	65	70	75	80	85	90	95	100	105	110	115
55									55	60	65	70	75	80	85	90	95	100	105	110	115
60										60	65	70	75	80	85	90	95	100	105	110	115
65											65	70	75	80	85	90	95	100	105	110	115
70												70	75	80	85	90	95	100	105	110	115



Width (W)																							
120	125	130	135	140	145	150																	
120	125	130	135	140	145	150	160	170	180	190	200												
120	125	130	135	140	145	150																	
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150																	
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200												
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150	160	170	180	190	200	210	220	230	240	250	260	270	280	290	300		
120	125	130	135	140	145	150																	
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120																							
120								</															