


Description

- Audio Distribution Amplifier takes one analog audio signal and then amplifies, spilt it to 6 audio analog signals.
- Accepts an analog audio signal by simple operation and distributes 3 analog audio signals with 2 channels.

Features

- Its outstanding feature provides low frequency loss with minimum noise.
- Audio gain generators enable to regulate the signal for leveling.
- Setting audio output
 - 1 in 6 out 1 channel setting: Move jumper pins to No.1 & 2
 - 1 in 3 out 2 channel Setting: Move jumper-pin to No. 2 & 3

Panel Drawing

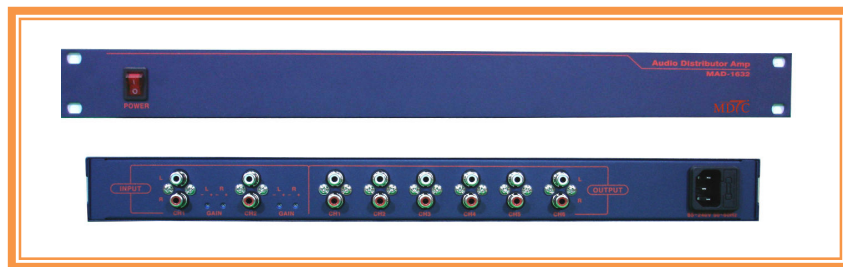

Specifications

- Audio Part
 - Input/Output number : 1 x 6 or 1 x 3out x 2ch
 - Input/Output type : unbalanced stereo, 600ohm
 - Input/Output connector : RCA
 - The gain : -11dB ~ +11dB
 - Frequency response : $\pm 0.1\text{dB}$ (20Hz ~ 20kHz)
 - Crosstalk : below 80dB
 - S/N : below 83dB (20Hz ~ 20kHz)

MAD-1632

Audio Distributor Amp




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

- Case & Power Part
 - Power source : AC 220V, 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 10Watt
 - Type : 19" Rack Type
 - Dimensions : 483(W) * 44.5(H) * 300(D) mm

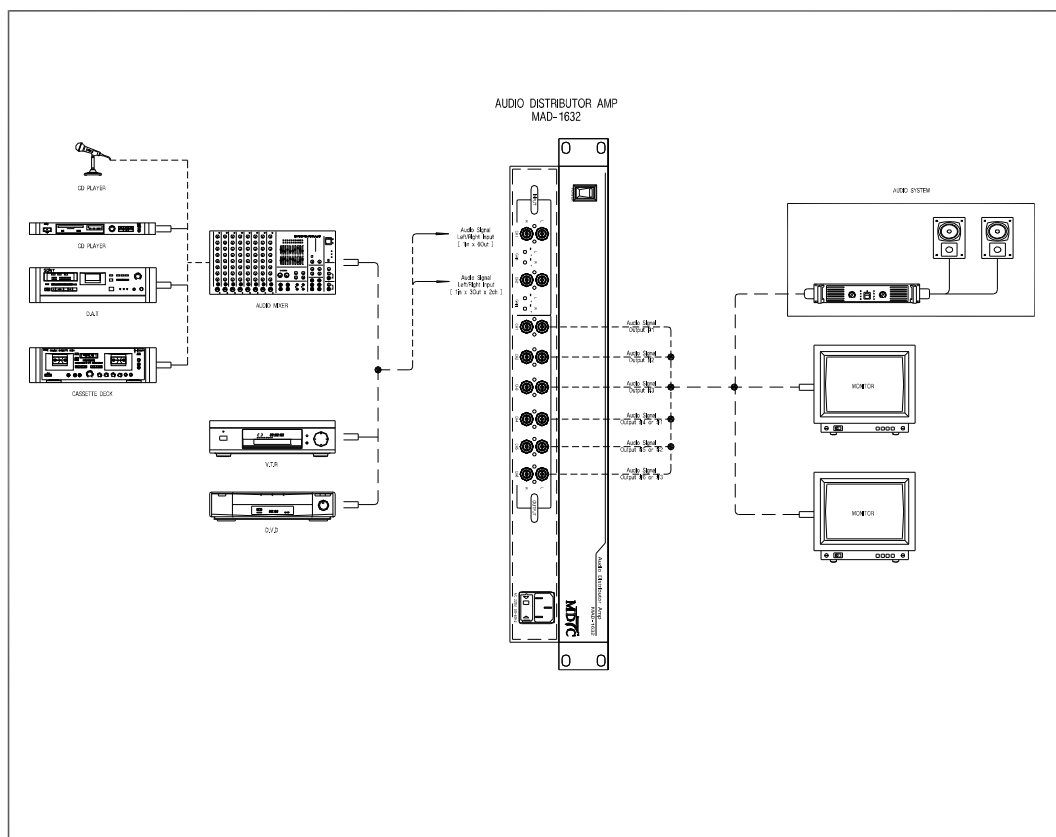

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217