


R16G-F Series 16Points, OMRON G6B Relay mounted, Detachable Terminal Block

User's Guide

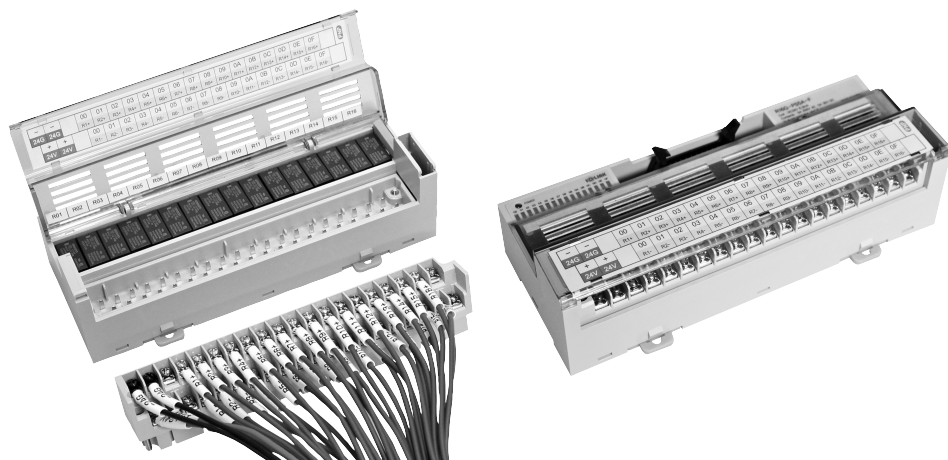

Thank you for purchasing product of SAMWON ACT.
Please check model of product that you purchase first, and read this manual prior to use it.

• Caution for Safety

Caution Case that results in serious damage in human body or equipment, and fire if user handles this equipment wrongly

Warning Case that results in slight damage in human body or equipment, and fire if user handles this equipment wrongly

Caution

- Do Not use other voltage except appointed voltage. It may be the cause of fire or damage of equipment.
- Use it within nominal voltage and current which are marked on load.
It may be the cause of fire or damage of equipment.
- Check COMMON polarity of using controller (PLC, etc) first, and then select proper product.
It may be the cause of fire or damage of this equipment and user's.
1) COMMON Polarity of controller is '+' (NPN TYPE) : R16G-NS5A-F
2) COMMON Polarity of controller is '-' (PNP TYPE) : R16G-PS5A-F
- Please make sure to check the internal wiring diagram of the terminal block and the arrangement of the controller PIN (terminal) when making the connection cable between the controller (PLC etc.).
It may be the cause of malfunction or damage of this equipment and user's.

※ The connection cable for PLC of various makers is provided by us. Please refer to the catalogue or contact Head or branch office if you need more detail models and specifications.

Warning

- Plug or unplug power line and/or connector for signal after making sure to shut off power so as that it is prevented to be damaged or malfunctioned.
- Read this user's guide which is attached to product, and check product's performance, specification, operation pattern, signal, and how to handle prior to use. Keep user's guide please.
- When wiring the terminal block, please tighten it with the specified torque using the appropriate tool.
If it is outside of this range torque, it may cause malfunction due to breakage or looseness of tightening surface terminal.
- When replacing a relay, check how to replace the relay on the back of the manual before using it.

• Model Configuration

Model	Installation Relay	IO Point(s)	Coil Rate voltage	Common		Interface		Dimensions	Mounting method
				Coil	Contact	Coil	Contact		
R16G-NS5A-F	OMRON G6B-1174P	16Point (1a * 16)	24V DC	NPN (COM)	Individual Com.	Connector MIL-C-83503 20Pin	Screw Terminal 7.4mm Pitch 40Pole	174.0 * 70	DIN Rail (Channel)
R16G-PS5A-F	-FD-US DC24V			PNP (COM)					


• G6B Relay Specification

Item		G6B-1174P-FD-US DC24V
Contact	Arrangement	SPST-NO (1a)
	Nominal switching capacity (resistive load)	5A 250V AC / 5A 30V DC
	Max. switching current	5A
	Max. switching voltage	380V AC / 125V DC
Coil	Nominal voltage	24V DC
	Pick-up Voltage	70% max of Rated voltage
	Drop-out Voltage	10% min of Rated voltage
	Coil resistance	2,880Ω
	Nominal operating power	Approx. 200mW
Surge voltage between contact and coil		6,000V
Initial breakdown voltage between contact and coil		AC 3,000V 50/60Hz 1min
Country of origin		JAPAN

• Material/Specification


Case	Modified PPO
Protective cover	Polycarbonate
P.C.B	Epoxy 1,6t / 2oz
Applicable wire	AWG22~16 (1.5mm/MAX)
Terminal Screw	M3.5 X 8L
Screw torque	7~8Kgf · cm (0.68~0.78 N · m)
Ambient temperature	-10℃ ~ +50℃ (No condensation)

• Applicable crimp terminal




• Dimension

- R16G-NS5A-F (+COM)

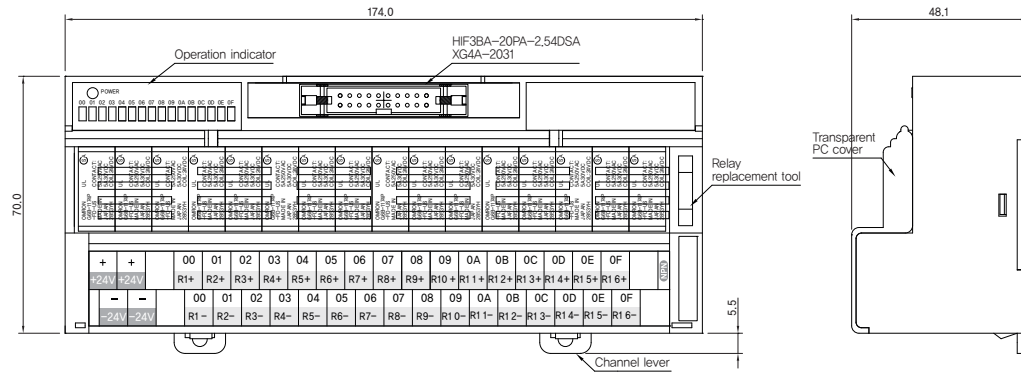


• Dimension

- R16G-PS5A-F (-COM)

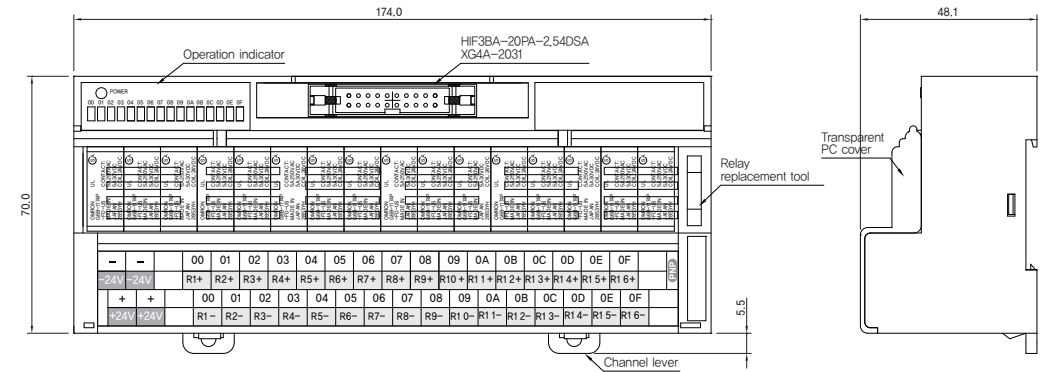


• Wiring Diagram

- R16G-NS5A-F (+COM)

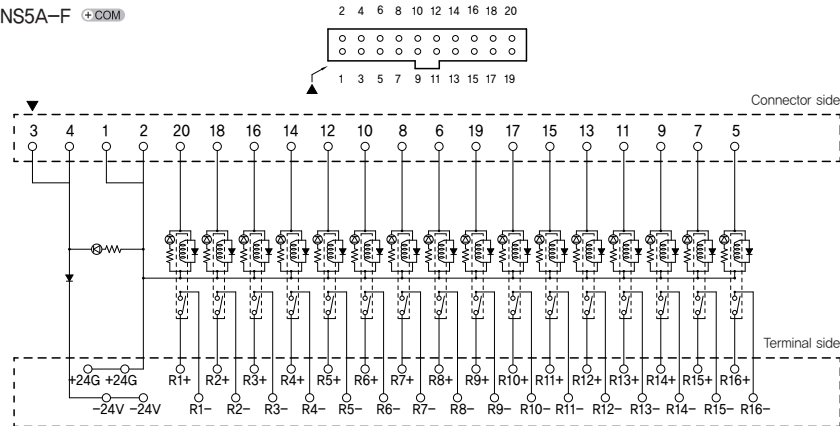

• Wiring Diagram

- R16G-PS5A-F (-COM)

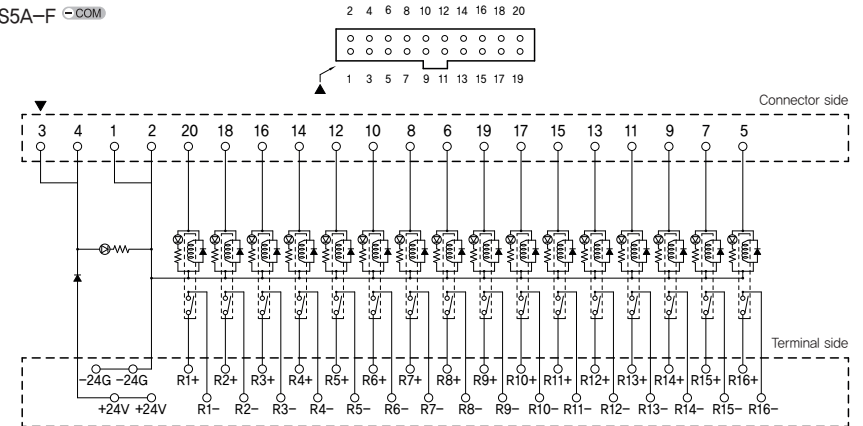

※ The above specifications are subject to change without notice.

※ Please contact HQ or branch office where you purchased product for A/S of this product or technique.

Major products

- Relay terminal 1, 2, 4, 6, 8, 16, 32point
- Interface terminal 20, 24, 26, 34, 40, 50, 57, 40 x 2pole
- PLC I/O Connecting cables MITSUBISHI, LSIS, CIMON, OMRON, FUJI, YOKOGAWA, HITACHI, SIEMENS, AB, etc.
- Servo Connecting cables Encoder cable, Power cable, Motion cable / MITSUBISHI, YASKAWA, OMRON, PANASONIC, , LSIS, SAMSUNG, etc.
- Wiring harness / Special cable assembly