

MMS-AV3232

A/V Matrix Switcher



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- This high-end Audio/Video Matrix Switcher enables to route 32 audio/video input signals to 32 audio/video output.

Features

- This is composed of Audio/Video Matrix Switcher in one device. Front number keys provide input/output control system and RS-232C/LAN port enable remote control function.
- Memory back-up function helps to memorize the last status while it is turned off.
- The front LCD panel enables easy view of inputs and outputs.
- This is high-end broadcasting equipment with balanced audio circuit.
- Sync hronized terminal enables to sync to the output signal and remote communication status can be monitored through LED.
- Audio/Video Matrix Switcher in one device enables easy installation and operation. Card type input/output operation helps simple & easy maintenance.

Panel Drawing

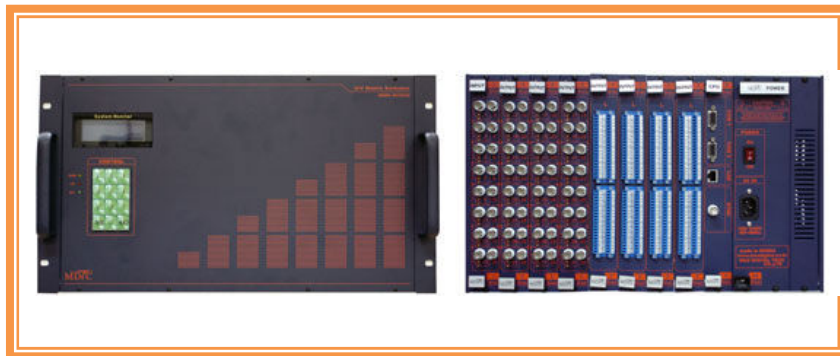

Specifications

- Audio Part
 - Input/Output number : 32 x 32
 - Input/Output type : Balanced/unbalanced stereo, 600ohm
 - Input/Output connector : Pluggable (Pitch:3.8, Poles:2*2P-2*24P)
 - Max level : 21dBm
 - Frequency response : $\pm 0.1\text{dB}$ (20Hz ~ 20kHz)
 - Crosstalk : below 80dB
 - S/N : below 83dB (20Hz ~ 20kHz)

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech.All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MMS-AV3232

A/V Matrix Switcher



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

○ Video Part


- Input/Output number : 32 x 32
- Input/Output type : Composite video 1Vp-p, 75ohm
- Input/Output connector : BNC
- Bandwidth : 100 MHz (-3 dB), fully loaded
- Frequency response : $\pm 0.1\text{dB}$ (750KHz ~ 4.7MHz)
- Differential phase error : 0.1°
- Differential gain error : 0.1%
- Crosstalk : below 60dB
- Sync : Standards, BNC, 75ohm

○ Remote Control Part

- Serial control : 2 RS-232, d-sub 9pin connect
- Ethernet control(Optional) : 1 RJ-45 female connector

○ Case & Power Part

- Power source : AC 85 ~ 240V 50 ~ 60Hz
- Temperature : 0°C ~ 40°C
- Power consumption : below 120Watt
- Type : 19" Rack type
- Dimensions : 483(W) * 267(H) * 300(D) mm

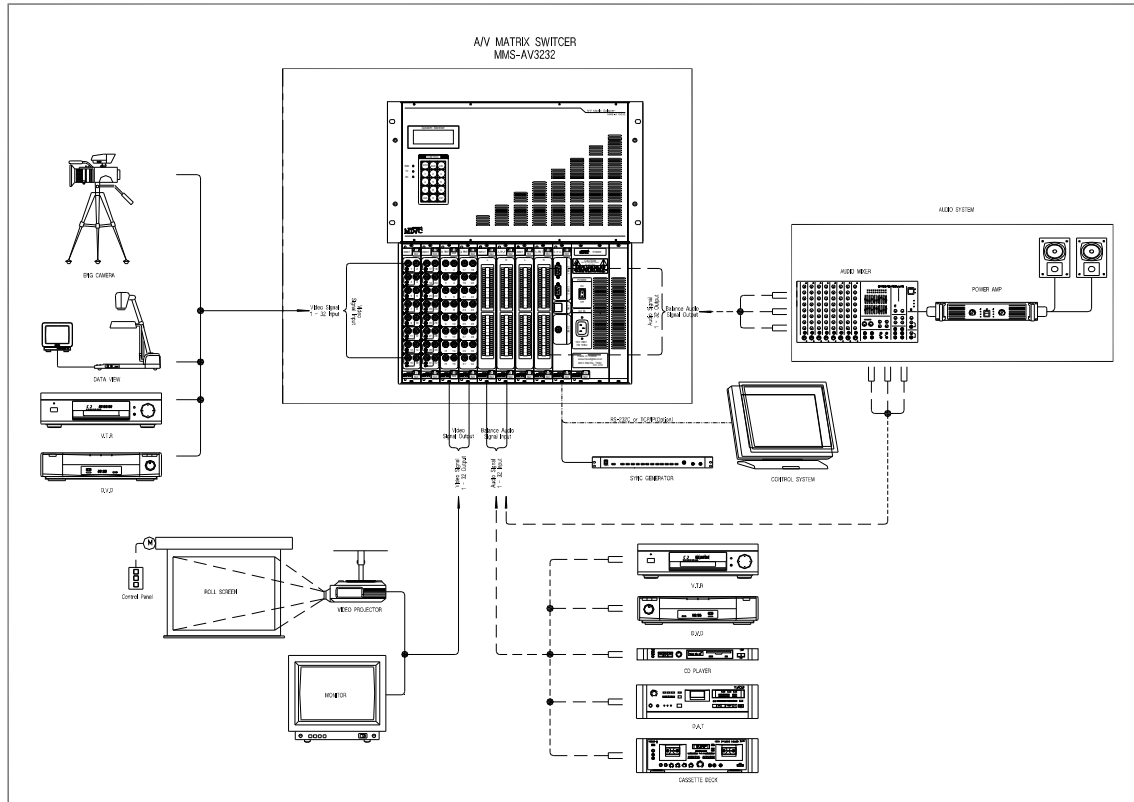

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217