

Description

- This device provides the ability to route 48 analog audio/video input signals to a channel.

Features

- Enable to control input/output by front control key. A rear panel RS-232C control port provides remote control function.
- Memory back-up function helps to memorize the last status while it is turned off.
- FND DISPLAY helps to view output status.
- There is a synchronized terminal to adjust external broadcasting device and video sync.

Panel Drawing



Specifications

- Audio Part
 - Input/Output number : 48 x 1
 - Input/Output type : Unbalanced stereo, 600ohm
 - Input/Output connector : RCA
 - Max level : 14dBm
 - Frequency response : $\pm 0.1\text{dB}$ (20Hz ~ 20kHz)
 - Crosstalk : below 80dB
 - S/N : below 70dB (20Hz ~ 20kHz)

MAVS-4801

A/V Selector Switcher




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

- Video Part
 - Input/Output number : 48 x 1
 - Input/Output type : Composite video 1Vp-p, 75ohm
 - Input/Output connector : BNC
 - Frequency response : $\pm 0.1\text{dB}$ (750KHz ~ 4.7MHz)
 - Differential phase error : 0.1°
 - Differential gain error : 0.1%
 - Crosstalk : below 60dB
 - Sync : Standards, BNC, 75ohm
- Remote Control Part
 - Serial control : 1 RS-232/422, D-sub 9pin connector
- Case & Power Part
 - Power source : AC 85 ~ 240V 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : Below 70Watt
 - Type : 19" Rack Type
 - Dimensions : 483(W) * 133.5(H) * 300(D) mm

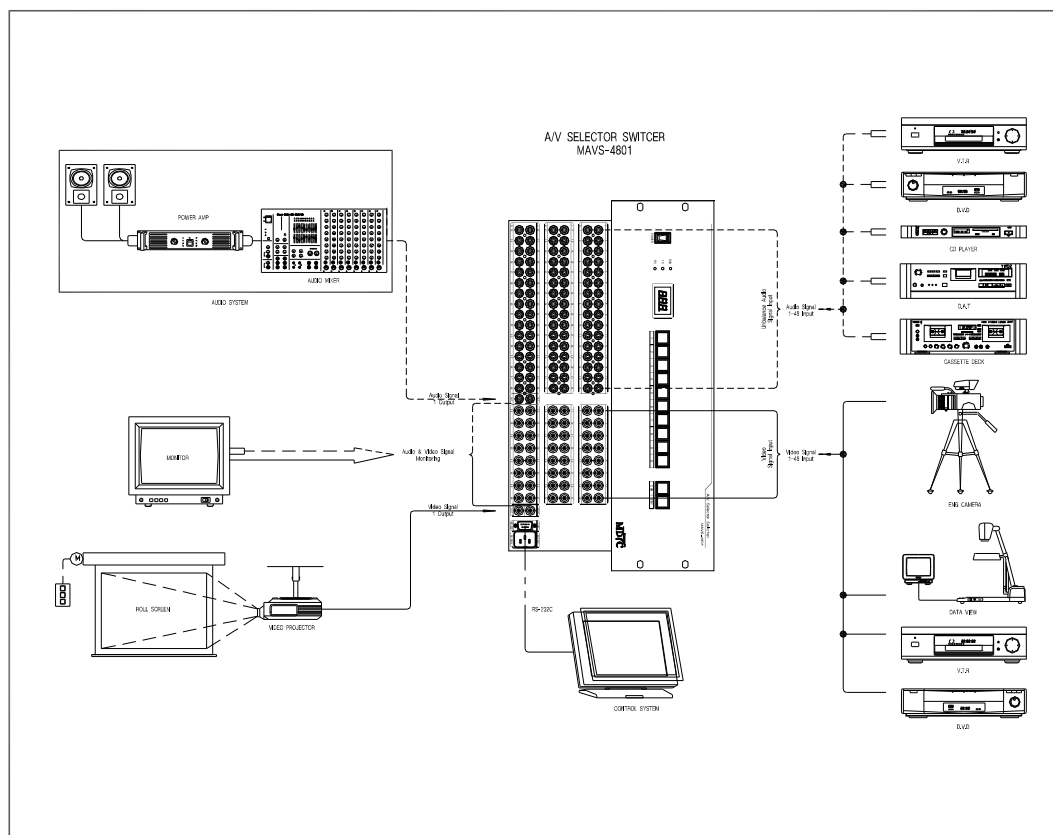

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217