

MALA-800

Audio Line Amp



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Description

- This device is line Amplifier to level sound for listening and recording by monitoring audio where non-directional condenser microphone is installed for detective sound at lecture room or even out of the building.

Features

- The desirable output audio level can be adjustable through the Audio gain volume in front of the panel.
- Each level status from the channel is displayed on FND and video gain generators enable to regulate the signal for leveling. Built-in communication port enables to control the level from external devices.

Panel Drawing



Specifications

- Video Part
 - Audio input : balance 8EA (WAGO Jack)
 - Audio output : balance 8EA (WAGO Jack), unbalance 8EA (WAGO Jack)
 - Pantorm : DC 12V or DC 48V
 - Impedance : balance 600ohm
 - Frequency responses : ± 0.1 dB (20Hz ~ 20KHz)
 - S/N : below 70dB
 - Crosstalk : below 60dB

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MALA-800

Audio Line Amp




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

■ Specifications

- Remote Control Part
 - Serial control : 1 RS-232, D-sub 9pin connector
- Case & Power Part
 - Power source : AC 85 ~ 240V, 50 ~ 60Hz
 - Temperature : 0°C ~ 40°C
 - Power consumption : below 20Watt
 - Type : 19" Rack type
 - Dimensions : 483(W) * 44.5(H) * 300(D) mm

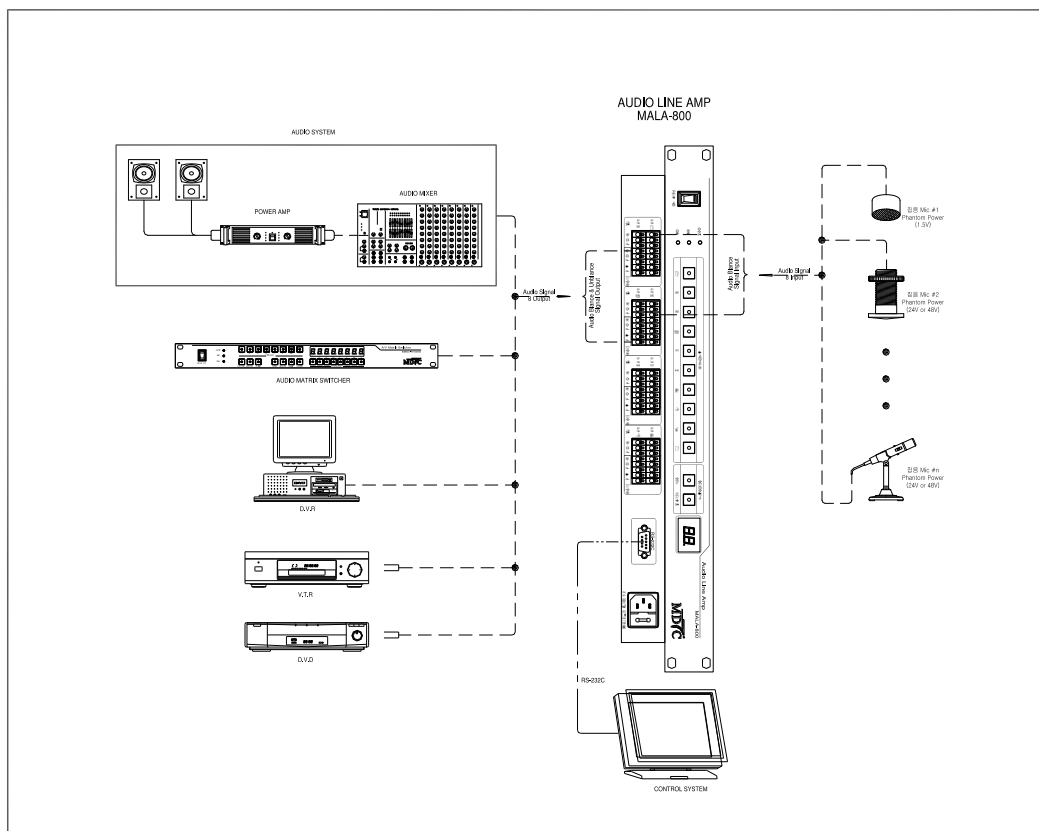

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217