

MRU-100T/R

RGB UTP Tx/Rx



Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>


Description

- This equipment is used for transmitting high resolution analog SXGA(1280 x 1024) RGB signals up to 100 meter with high resolution quality by using the Category 5.5E,6(UTP) cable.
- You can also use it, setting one between audio(mono) signal and data signal in advance by using Category 5.5E,6(UTP) cable.

Features

- As transmitting equipment, MRU-100T is used for transmitting up to 100 meter.
- As receiving equipment, MRU-100R restores the signals received far from MRU-100T through UTP line.
- It includes Gain and EQ function for adjusting received signals, and it also has function for adjusting each color delay line.
- Having one port for distributing function, MRU-100T can be monitored previous transmitted condition. Audio and data selecting switcher are attached on the front panel.

Panel Drawing

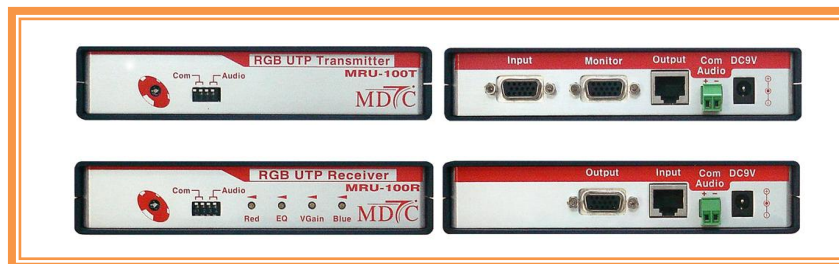

Specifications

- Transmitter / MRU-100T
 - Input signal : 1 analog input RGBHV, RGBS, RGsB
 - Loop output : 1 analog output RGBHV, RGBS, RGsB
 - Connector type : Input 1 15pin HD female, monitor 1 15pin HD female, output 1 RJ-45
 - Audio or Data Input /Connector : mono unbalanced / stelvio or RS-485 data / stelvio
 - Bandwidth : 350MHz
 - Power input : DC 9V 850mA (Power adaptor)
 - Dimension : 150(W) * 26(H) * 100(D) mm

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved
Lead the 21st century with technology and service ..

Asia
China
Singapore
Korea

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217

MRU-100T/R

RGB UTP Tx/Rx




Equipment Overview & Function

Max Digital Tech Co., Ltd <http://www.maxdigital.co.kr>

Specifications

- Receiver / MRU-100R
 - Input signal : 1 analog input RGBHV, RGBS, RGsB
 - Connector type : input 1 RJ-45, output 1 15pin HD female
 - Audio or Data output /Connector : mono unbalanced / stelvio or RS-485 data / stelvio
 - Bandwidth : 350MHz
 - Power input : DC 9V 1A (Power adaptor)
 - Dimension : 150(W) * 26(H) * 100(D) mm

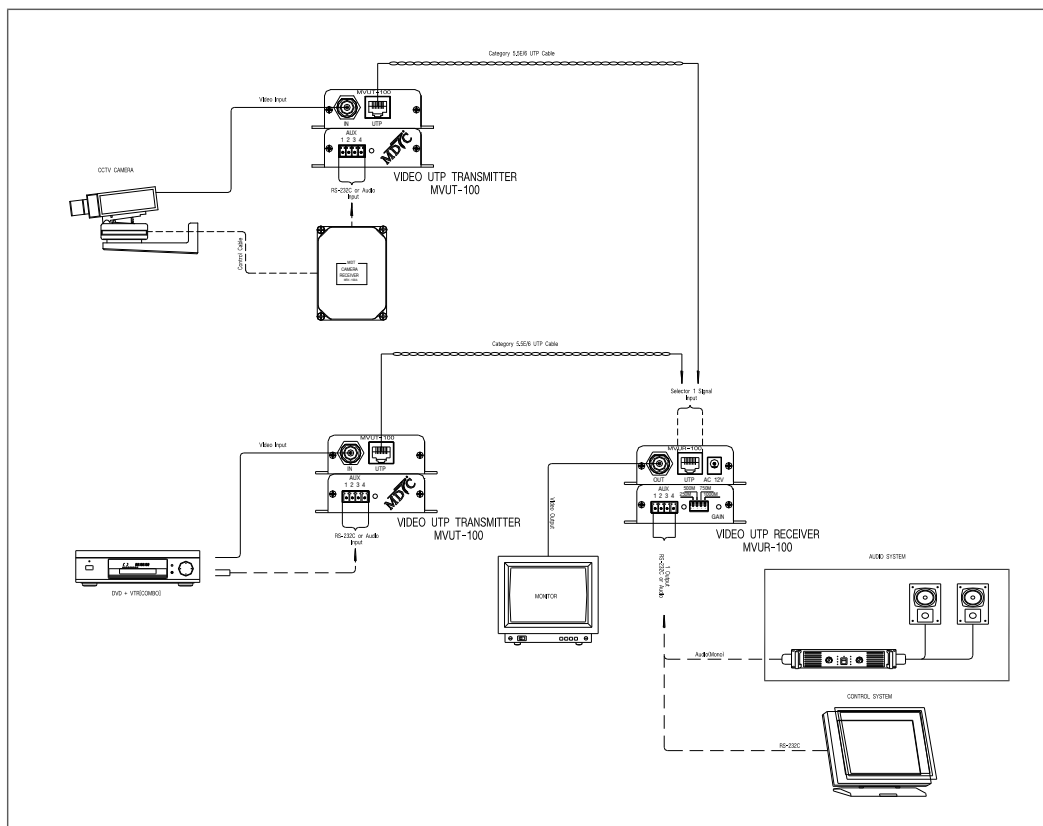

[www.maxdigital.co.kr]



Max Digital Tech Co.,Ltd

Copyright 2006 Max Digital Tech. All rights reserved.
Lead the 21st century with technology and service ..

**Asia
China
Singapore
Korea**

+65 81335582
+86 021 54249750
+65 81335582
+82 2 2026 1200

Fax. +65 67828910
Fax. +86 021 54240199
Fax. +65 67828910
Fax. +82 2 2026 1217