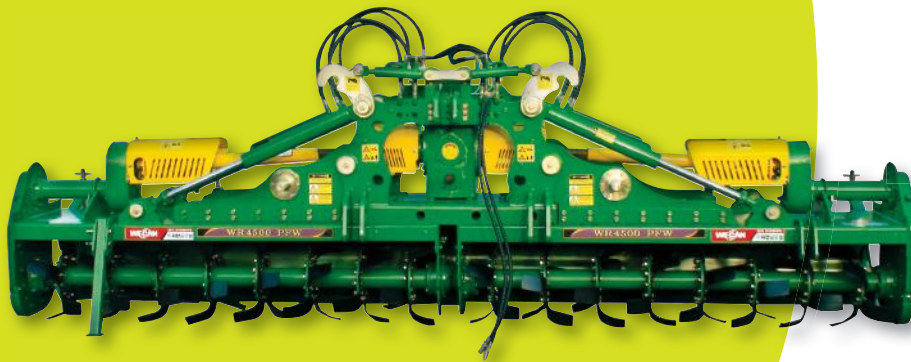


Quality
Premium
Super value

ROTA VATOR / POWER HARROW

Agricultural Machinery Catalogue



The Quality super value Rotavator from South Korea

WECAN

www.wecan21.com/eng

Key Feature of WECAN GLOBAL products

- 1 Year Quality Warranty
- In-House Gearbox Assembly, Metal Fabrication Facilities (Laser Cutting / CNC)
- Atos special steel
Korean special steels “Atos” used in flange design.
- Heat Treated Paint (for extra Rust Resistance)
All steelwork given a “5 year no rust hot dip paint treatment” before top coating
- Dedicated in-house design team and manufactured on site with ISO 9001 compliance
- Wide range of products : Rotavators for small tractor(20 HP) ~ heavy tractor (300 HP), which will cater for all soil types and individual farmer requirements worldwide.
- Easy to work regardless of any soil condition
- Vibration absorbing dual structure of special wide-frame mounted
- Extended tractor life due to vibration-free technology
- Durable Gearbox : Intermediate work with high-precision and high-powered gear with conversion way
- Various options for customization(Soil Leveler, Bed Former)
- Efficient overseas sales team : Fast deliver + fast feedback to any customer in the world



Second Factory A panoramic view



Second Factory B-2



Second Factory B-3



Second Factory A~1



Second Factory A~2



Second Factory B panoramic View



Yes!

WECAN

Wecan Global was founded in 2004 to enrich the human life by solving the food shortage of those countries in need. In addition, Wecan Global became a world class brand name by producing state-of-the-art machinery in an era of explosive population growth and serious food shortage due to increases in international grain prices.

To improve productivity with a better technology, to satisfy farmers' expectations through the extension of the products' life, and to keep the image of a luxurious brand, Wecan Global equipped with a high-tech automated facility in the largest manufacture in Asia with a consistent global investment and technology development. It has greatly improved performance and durability by producing more than 90% of the parts, and the fuel control and the vibration reduction effects were realized by the most efficient product design.

We always provide products which meet our customers' needs such as soil conditions by having 12 different kinds for, a total of 70 diverse products to meet farmers' needs.

Wecan Global, with technology, became an agricultural machinery export company representing Korea since its establishment in 2004 by contracting an exclusive distributor agreement with the United States, Australia, and the United Kingdom as well as by exporting to more than 30 countries including Japan, Greece, Thailand, the Philippines, and Indonesia.

Wecan Global is moving faster to go side by side with the World agricultural machinery brands and furthermore, to lead the world agriculture and stockbreeding.

DUAL Series

Two-way Rotavator

We challenge with confidence to any circumstances and create a dream agriculture. Experience the magnificence of the width and wonderful work capacity.









Features of the machine



- Two-way power transmission gearbox
- Shake and vibration resistant by equipping a large safe mode upper frame
- Extra-large 149m / m tillage axis
- Independent two-way drive gear mounted
- Hybrid center gearbox mounted
- Multi gearbox oil cooler corresponding to the temperature (optional)

Work Features

- Stable plowing to a certain depth and width
- Prevent overload and shaking of the tractor by distributing power in both directions independently
- Creates the optimal conditions for plants to grow steady by optimizing the depth of the soil



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	4000	DUAL	4350	1221	1440	2000	14	84	4000	150
	4500		4750			2220	16	96	4500	180
	5000		5350			2370	18	108	5000	200
	5500		5850			2500	20	120	5500	230
	6000		6350			2630	22	132	6000	250
	6500		6850			2760	24	144	6500	270

 Conversion Gear		
	540rpm	1000rpm
19-25	121	224
21-23	145	269
* 23-21	174	322
25-19	209	387

HFW Series

Folding Power Harrow

Wecan Global has enabled new technologies of wide tillage operations in rough terrain.

Features of the machine

- Special high-strength folding frame
- Hydraulic safety system
- The specially structured blade(molding)
- Vertical high-strength gear box
- Horizontal transmission of standalone gear arrangement



Work Features

- A wide variety of tasks are possible without shaking
- Crushes acidified soil and mixes evenly. Also, cultivates with adequate water leakage and conservation for the proper plants growth
- Easy to work regardless of soil quality. The soil is crushed for the optimum conditions for plant growth



MODEL			BODY(mm)					WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width		Length	Height		(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	3500	HFW	3550	2864	825	1605	1800	1000	8	16	3400	110-160
	4000		4000				2080	1200	12	24	3900	120-170
	4500		4550				2300	1400	16	32	4400	130-180
	5000		5100				2530	1600	20	40	4900	140-200
	5500		5800				2900	1800	24	48	5600	150-220
	6000		6120				3150	2000	28	56	5900	160-240

 Conversion Gear	 540rpm 1000rpm	
	540rpm	1000rpm
28-16	160	297
25-19	213	395
* 19-25	370	684
16-28	491	910

* The above specifications are subject to change with or without prior notice.

* Default Setting

PFW Series

Folding Rotavator

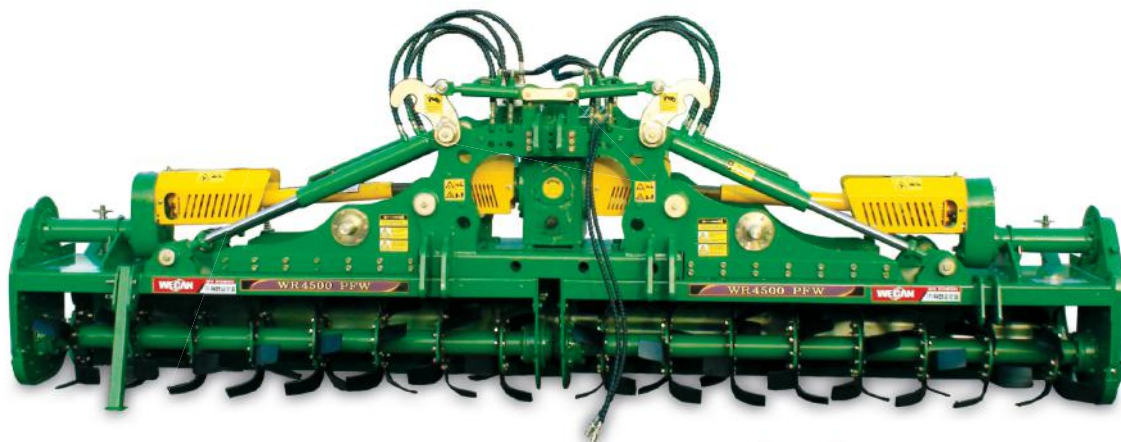
Tasks in large scale can be done more quickly and easily. Now it becomes a reality, not an imagination.











Features of the machine



- Safe three-dimensional frame
- Two-way stand-alone side gear boxes
- Two-way double structured cruise gear boxes
- The two-way four-speed gearbox
- Safe hydraulic units
- Double structured vibration prevention frame
- Hypoid gear mounted

Work Features

- Ensure the best working environment
- Ensure the best workability to operators and make it possible to plough a large field in a short period of time
- There is no vibration or shaking
- Creates the finest field condition to grow the plants



MODEL			BODY(mm)				WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR	
			Width		Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)	
												
WR	3500	PFW	3745	2720	1100	1600	1870	1550	12	72	3375	120—180
	4000		4125				2060	1600	14	84	3875	120—180
	4500		4705				2350	1700	16	94	4375	130—180
	5000		5215				2605	1800	18	108	4885	140—200
	5500		5980				2988	1900	20	120	5690	150—210
	6000		6279				3128	2000	22	132	5990	160—250

 Conversion Gear		
	540rpm	1000rpm
28-16	85	158
25-19	113	210
* 19-25	196	363
16-28	261	483

RFW Series

Folding Rotavator Suitable for Paddy fields

We are confidently challenging to create agricultural environment in any harsh conditions.











Features of the machine

- Safe three-dimensional frame
- Two-way stand-alone side gear boxes
- Two-way double structured cruise gear boxes
- The two-way four-speed gearbox
- Safe hydraulic unit
- Double structured vibration prevention frame
- Hypoid gear mounted

Work Features

- Ensure the best working environment
- Ensure the best workability to operators and make it possible to plough a large field in a short period of time
- There is no vibration or shaking
- Creates the finest field condition to grow the plants



MODEL			BODY(mm)					WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width		Length	Height		(kg)	(pcs)	(pcs)	(mm)	(HP)
												
WR	4000	RFW	4125	2720	1100	1600	2060	1550	14	84	3795	120—170
	4500		4705				2350	1650	16	96	4375	130—180
	5000		5215				2605	1750	18	108	4885	140—200
	5500		5980				2988	1800	20	120	5690	150—210
	6000		6279				3128	1900	22	132	5990	160—250

rpm	rpm
540	194

* The above specifications are subject to change with or without prior notice.

* Default Setting

HAV Series Harrow + Rotavator !!!

The World's first multi-combination developed by Wecan Global to create an essential growing condition for plants, and to recover acidified soil.









Features of the machine



- Adoption of input/output high-strength gear box
- Adoption of high capacity multi-level gearbox
- Adjustable height with hydraulic oil pressure lift
- Adoption of 100%power transmission frame gear
- Independent heat exchangers for gearboxes (optional)
- Technological safety multi-frame
- Enables two outputs with one input at the same time-high-strength gearbox

Work Features

- Helps plants' growth with smooth water leakage when ploughed with a harrow blade ahead of a rainy season
- Also helps germination with a smooth moisture control during a drought
- Functional soil crush prevents the water leakage and soil erosion, and helps the roots of the plants grow steadily



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	2500	HAV	2730	1720	1366	1403	10/16	60/32	2500	115
	3000		3233			1926	12/24	72/48	3000	125

 Conversion Gear		
	540rpm	1000rpm
19-16	134	248
18-17	150	278
* 17-18	168	312
16-19	189	350

TGW Series

Titan Rotavator

Farmer's dream is ripening on land.

Features of the machine

- High-performance multi gear box
- vibration absorbing upper frame
- Strongest carbon steel made with special materials
- Anti-vibration ploughing spindle
- Heat exchanger gearbox (optional)









Work Features




- Optimal conditions for plant growth
- Unwavering tillage is possible with a balanced array of large flanges
- Stable ploughing is possible by discharging soil evenly and, prevent both overload of tractor and body shaking



Center

Side

MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	2600	TGW	2670	1221	1387	930	10	60	2600	115
	2850		2950			1130	11	66	2850	125
	3050		3290			1330	12	72	3050	130

 Conversion Gear	 	
	540rpm	1000rpm
24-16	110	204
21-19	149	276
* 19-21	182	337
16-24	248	459

* The above specifications are subject to change with or without prior notice.

* Default Setting

MGW Series

Mountainous Rotavator

Combination of strength, softness, and deep impression.

Features of the machine

- Vibration absorbing, dual structure of special wide-frame
- Vibration-free, regular interval, safe flanges
- Both side automatic depth adjustment plough
- High-precision, high-powered gear

Work Features

- Create the best conditions for plant growth
- Eco-friendly features with three-dimensional field crushing
- Specially designed to work on rough and mountainous soil



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	2050	MGW	2285	1030	1200	550	7	42	2050	65~100
	2150		2380			610	8	48	2150	68~100
	2250		2488			640	9	54	2200	80~100
	2350		2541			680			2350	80~110
	2500		2580			720			2400	85~110
	2600		2790			750	10	60	2600	90~150
	2850		3030			760	11	66	2850	100~150
	3050		3265			780	12	72	3050	110~175



Conversion Gear	540rpm		1000rpm	
24-16	103		191	
21-19	140		259	
* 19-21	171		316	
16-24	232		429	

MGWH Series

MGW models redesigned to fit bigger tractor

Mountainous Rotavator

Combination of strength, softness, and deep impression.

Features of the machine

- Vibration absorbing, dual structure of special wide-frame
- Vibration-free, regular interval, safe flanges
- Both side automatic depth adjustment plough
- High-precision, high-powered gear

Work Features

- Create the best conditions for plant growth
- Eco-friendly features with three-dimensional field crushing
- Specially designed to work on rough and mountainous soil



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	2350	MGWH	2530	1030	1200	630	8	48	2350	85-120
	2500		2665			750	9	54	2500	95-120
	2600		2790			780	10	60	2600	100-120
	2850		3030			840	11	66	2850	110-150
	3050		3270			870	12	72	3050	120-175

 Conversion Gear	Center	Side
	540rpm	1000rpm
24-16	103	191
21-19	140	259
*19-21	171	316
16-24	232	429

* The above specifications are subject to change with or without prior notice.

* Default Setting

DGW Series WECAN GLOBAL's Most popular Model!

Dream Rotavator

Mountainous Rotavator suitable for both paddy & dry fields.
Feel the best softness in the harsh working environment.

Features of the machine

- Powerful and durable super gears
- Specialized flanges and tillage
- Specially designed, vibration-free, regular interval flanges

Work Features

- Optimum cultivation to prevent acidification of soil
- Optimized crushing capacity of rough soil and mountainous farm
- Fuel saving, vibration-free cultivation
- Improved Work efficiencies





MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	DGW	1250	1450	950	1150	392	5	30	1250	35-40
		1350	1550			403			1350	38-45
		1450	1650			411			1450	40-50
		1550	1756			419	6	36	1550	43-50
		1650	1865			425			1650	45-50
		1750	1965			433			1750	45-60
		1850	2065			445	7	42	1850	50-70
		1950	2191			465			1950	52-75
		2050	2300			495	8	48	2050	55-80
		2150	2358			520			2150	55-80
		2300	2560			540	9	54	2300	65-90
		2500	2730			590			2500	80-110
		2800	3030			638	10	60	2800	80-175
		3000	3228			736			3000	110-180



Center

Side

 Conversion Gear		
	540rpm	1000rpm
19-16	134	248
18-17	150	278
* 17-18	168	312
16-19	189	350

* Default Seting

* The above specifications are subject to change with or without prior notice.

SGW Series suitable for paddy field

Super Multi Gear Rotavator

Another miracle made with high-tech.
Now feel the wonder and convenience.









Features of the machine

- Powerful and durable super gears
- Vibration absorbing dual structure of special upper-frame
- Vibration-free, regular interval flanges
- Best durability, automatic rolling rear cover

Work Features

- Work faster and reduce fuel cost
- No soil and straw locking
- Extends tractor life with vibration-free feature



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	1650	SGW	1865	950	1180	415	6	36	1650	35—42
	1750		1950			420	7	42	1750	35—45
	1850		2064			430		42	1850	40—50
	1950		2191			435	8	48	1950	42—65
	2000		2300			465		48	2000	45—70
	2150		2348			480	9	54	2150	45—80
	2300		2560			510		54	2300	47—85
	2500		2730			548	10	60	2500	58—120
	2800		3030			598	11	66	2700	67—150
	3000		3233			676	12	72	3000	75—180

* The above specifications are subject to change with or without prior notice.



Conversion Gear	540rpm		1000rpm	
19-16	134		248	
18-17	150		278	
* 17-18	168		312	
16-19	189		350	

* Default Setting

SG Series









Super Rotavator

50Hp is enough instead of 70HP.

Features of the machine



- SG series will suit lifestyle property owners, landscape gardeners, maintenance contractors or anyone wanting value for money in a quality, compact machine.
 - Upper frame : dual structured vibration-absorbing special frame
 - Oil seal : all-weather spider seal
 - Rear Plates : ensure the best durability, hydraulic automatic rolling control
- SG Series are equipped with strong and durable korean tech. gears. High capacity precision gears drive smoother and stronger.



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	1250	SG	1450	950	1180	285	5	30	1250	25-32
	1350		1550			300			1350	28-35
	1450		1650			325			1450	30-38
	1550		1750			350	6	36	1550	34-40
	1650		1850			385			1650	36-45
	1750		1950			403			1750	38-45
	1850		2064			415	7	42	1850	40-50
	2000		2298			438			2000	45-70



SG : Side Gear Type

	
rpm	rpm
540	146

* Default Setting

SM Series









Super Rotavator

Small & Light but Strong

Features of the machine



- SM series will suit lifestyle property owners, landscape gardeners, maintenance contractors or anyone wanting value for money in a quality, compact machine.
 - Upper frame : dual structured vibration-absorbing special frame mounted
 - Oil seal : all-weather spider seal
 - Rear Plates : ensure the best durability, hydraulic automatic rolling control
- SM Series are equipped with strong and durable korean tech. gears.
- Automatic self tensioning chain drive.



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	800	SM	1000	840	800	158	3	18	800	16-32
	1000		1200			162	4	24	1000	18-33
	1250		1420			170	5	30	1250	18-34
	1350		1520			190			1350	30-36
	1450		1620			210	6	36	1450	32-38
	1550		1720			230			1550	35-40



SM : Side Chain Type

	
rpm	rpm
540	176

* The above specifications are subject to change with or without prior notice.

* Default Seting

DP Series

Deep Plowing Rotavator

Deep plowing rotavator, created by the best new technology of Wecan Global, solved the hot and humid environment of an airtight house and the fumes which influence human body.

Features of the machine



- Dual structured vibration absorbing frame that ploughs up to an average of 50cm to 60cm
- Special material, vibration-free, deep ploughing flanges
- Super high-powered gear box
- Side-chain and automatic tension for light-duty models

Work Features


- 20 times faster than other existing deep ploughing Rotavator
- Vibration-free with ergonomic design (No water spilling during ploughing)
- Eco-friendly design to reduce tractor fumes in the airtight houses
- Over 90% accuracy in evenly mixing fertilizer with soil when ploughing
- No harm or damages when doing repeated cultivation. (Dissolves salt accumulation)



DP Series

	
rpm	rpm
540	73

DPW Series

Conversion Gear		
	540rpm	1000rpm
16-19	84	156
17-18	94	174
*18-17	105	194
19-16	118	219

MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	1550	DP	1750	840	1320	346	6	36	1550	35-45
	1650		1850			381	7	42	1650	43-55
	1850	DPW	2050			430	8	48	1850	60-80
	2150		2346			550	10	60	2150	80-100

* The above specifications are subject to change with or without prior notice.

* Default Setting

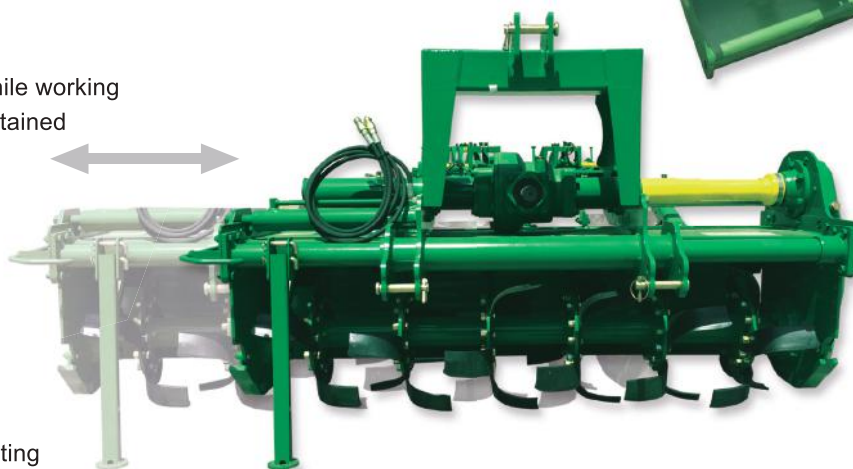
MV Series

Mobile Rotavator

The great revolution of shifting rotavator.
Experience the difference of invisible state-of-the-art technology!
Main use: for the house orchard.

Features of the machine









- Hydraulic system moving horizontally, while working
- Korea's first high-precision balance-maintained dual structured frame
- Powerful and durable gearbox mounted
- Mobile gearbox and high-powered gears
- The highest density value side gears
- Vibration-free flanges
- Plough frame on both sides (optional)





Work Features

- Stable operation without shaking or vibrating
- Ploughing more than 300mm, semi deep ploughing is also possible
- Evenly distributes the energy with our patented power transmission application. Minimizes tractor fumes in the house.



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
										
WR	1550	MV	1750	840	1050	370	6	36	1550	36-50
	1650		1850			385			1650	38-60
	1750		1950			415			1750	42-70
	1850		2050			440	7	42	1850	44-80



	
rpm	rpm
540	172

* The above specifications are subject to change with or without prior notice.

* Default Setting

MR Series

Multure Series

Fast work outputs on grass, orchard, or on large grasslands.

Features of the machine

- Hydraulic system allows horizontal shifting
- high-strength frame with special materials
- Equipped with high-speed, specially designed rotary tillage
- Full side belt system
- Semi-permanent usage with full oil system
- Rear roller mounted



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	1350	MR	1480	977	757	170	9	36	1300	21-32
	1500		1780	1056	969	290	9	36	1500	32-43
	1700		1980			310			1700	43-50
	1850		2080			350	10	40	1800	50-60
	2000		2280			380	12	48	2000	55-65
	2300		2580			415	13	52	2300	55-75
	2500		2780			450	14	56	2500	60-75
	2700		2980			485	15	60	2700	65-80
	3000		3180			510	16	64	3000	70-110

rpm	rpm
540	1800

* The above specifications are subject to change with or without prior notice.

* Default Setting

HR Series

Power Harrow Series

Power Harrow is exported to all over the world.
Exerts greater power on barren lands

Features of the machine

- Special sturdy steel frame
- Vibration-free, high efficiency gearbox
- Easily replaceable blades
- Multi-tasks are possible by attaching additional installments.



MODEL			BODY(mm)			WEIGHT	FLANGE	BLADE	Tilling Width	TRACTOR
			Width	Length	Height	(kg)	(pcs)	(pcs)	(mm)	(HP)
WR	2000	HR	2016	1080	1366	455	6	12	2000	85-110
	2500		2516			855	8	16	2500	90-135
	3000		3016			1250	10	20	3000	135-150
	3700		3716			1455	12	24	3700	150-175

 Conversion Gear	 540rpm 1000rpm	
	540rpm	1000rpm
34-22	148	275
32-24	172	318
* 24-32	305	566
22-34	354	656

* The above specifications are subject to change with or without prior notice.

* Default Seting

WHDP Series

DEEP PLOUGH

The world's first development!
Completely unique and ideal plough design.

Features of the machine & working condition

- Sturdy frame with high-strength steel tips allow ploughing up to 700mm deep under any types of soil
- 30mm thickness of plowshare legs
- Ideal for tough soils with hard rocks
- With a superior driving force, it can be operated on hilly areas as well as on roughest soil
- Great performance on rough soil, dry & hard soil and rocky fields.



- High Quality Boron Alloy steel
(used in Excavator's Bucket Teeth)

MODEL	Width	Length	Height	kg	Q'ty	Tilling Width	Tilling depth	HP
WHDP500	2095	1800	1380	870	5	2095	700	100
WHDP700	2850	2095	1380	1180	7	2850		125

* The above specifications are subject to change with or without prior notice.

WDP Series








DISC PLOUGH



Entirely different engineering-design to other existing disc plows

Feature of the machine & working condition

- Full-body casting mold gear box & Powerful side gear system
- Hydraulic cylinders with automatic locking valve
- Center and side-driven gearboxes excellent for deep ploughing and perfectly turning over rice straws and soil.
- The rotation disc allows excellent performance on fields with lots of straws & weeds.



MODEL	Width 	Length 	Height 	kg 	Q'ty 	Tilling Width 	HP 
WDP60	1060	2200	1150	425	6+2	1800	45-55
WDP80	1632	2710	1320	680	8+2	2300	65-90
WDP100	1632	3230	1365	690	10+2	2830	100-110
WDP120	1632	3757	1365	750	12+2	3370	120

	
rpm	rpm
540	75

* The above specifications are subject to change with or without prior notice.

PLOW Series

Innovation of PLOUGH

Experience the amazing performance of innovative plough that Wecan Global is proudly presenting in the global market.

Features of the machine

- 125*75 solid high strength frame
- Functional ploughshare unit, that is designed to fit under various soil condition
- Each stand-alone frames
- Sturdy frame with stable structured link hangers
- Bit is installed for frame multi-use

Work Features

- Reduced load through the traction and low fuel consumption of the tractor
- Fast operation
- Easy to use on dry, paddy or wet fields, and useable during all-seasons
- Designed to adapt any environment.



4 ROW



6 ROW



8 ROW



9 ROW

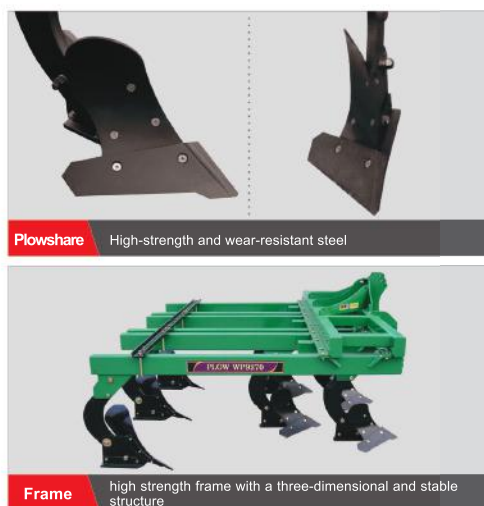


“Wecan Global is in the forefront for the agricultural dream”

S Type



W Type



Model			Classify	Width (mm)	Lenght (mm)	High (mm)	Weight (mm)	Plowshare	Tilling width	Tractor (HP)
WP	3100	S	3 ROW	1336	1257	1082	250	3	900	38–53
	4120	S	4 ROW	2246	1290	1260	250	4	1200	35–45
		W								
	6185	S	6 ROW	2246	1920	1260	330	6	1850	45–55
		W								
	6195	S	6 ROW	2246	1920	1260	350	6	1950	50–65
		W								
	6200	S	6 ROW	2246	2010	1260	370	6	2000	65–80
W										
6210	S	6 ROW	2246	2010	1260	390	6	2100	75–85	
	W									
8250		8 ROW	2246	2556	1260	480	8	2500	80–100	
9270		9 ROW	2246	2890	1260	550	9	2700	85–100	

* The above specifications are subject to change with or without prior notice.

RAKE Series

Feel the best convenience and safe usability of folding Rake.

Features of product

- Special frame attached
- Hydraulic injection, two way gearbox
- Hydraulic side steering with two-way propeller tracks
- Two side tires
- Safe hydraulic folding installment

Features of working

- High mobility and work efficiency
- Easy cornering with side steering installment
- Minimizing soil splattering
- Easy work by up and down adjustment
- Convenient work performance



Model			Working width	Length	Unfolded width	Height	Weight	Folded width	Folded height	Track mode	Hook	HP
WHK	3800	FRW	3800	3295	3840	1764	805	2223	1873	2 track mode	12	55–68
	4300		4300	3484	4315	1780	830	2280	2212	2 track mode	12	60–75
	4600		4600	3512	4612	1811	870	2316	2456	2 track mode	12	70–80
	4800		4800	3612	4816	1817	910	2320	2477	2 track mode	12	75–110

WD-04RC Series







SWEET POTATO HARVESTER

55HP is enough to harvest, regardless of soil condition

Feature of Machine

- Full-body casting mold gear box & Powerful side gear system
- Sturdy frame body for stable movement
- Specially designed ploughshare for harvesting potato in furrow-type field
- Hydraulic, adjustable ploughshare (for variable widths of furrow)
- Cemented carbide tips for better performance(Optional)



MODEL	Width	Length	Height	Weight	Q'ty	Tractor HP
						
WD-04RC	2850	1330	1100	500	4	55HP

* The above specifications are subject to change with or without prior notice.

WRD Series

Rotary Ditcher Series

Rotary Ditcher Series Easier and Cleaner Furrows

Feature of Machine

- Powerful center & side gear system
- Ideal arrangement of rotary blades
- Forms deep and clean furrows
- Excellent performance on spreading soil over sowed seeds



MODEL	Width	Length	Height	Weight(kg)	Blade(pcs)	Tractor(HP)
WRD-100	900	1167	1184	290	20	35-70
WRD-200	900	2820	1350	720	40	65-130

WSD Series

Seeder Series

Row propagation method to sow seeds and cover up with soil on paddy field

Feature of Machine

- Equipped with highly sensitive sensor that controls the injection speed according to the driving speed (all the entire seeds are sown in)
- Also can be used after having chopped straws spread on the field.
- Effective cost saving and yield increasing effect when compared with the traditional method.
- You can now sow the seeds, cover up, and form a furrow - all at the same time (Rotary ditcher attached model WSD-10COM / WSD-16COM)
- Large seed/fertilizer container allows a lot of sowing in one administration.
- Can sow immediately after harvesting rice (preventing acidification of field by restoring straws on field)



Model	width	Length	Height	Weight	Seeding Width	Seeding Rows	Tractor
WSD-10R	2025	1200	1330	450	170	10	50
WSD-10COM	2375	1750		750			80
WSD-16R	3000	1200		600		16	80
WSD-16COM	3350	1750		900			100

* The above specifications are subject to change with or without prior notice.

All WECAN Rotavators are supplied with a PTO shaft equipped with overload protection.

All WECAN Rotavators are equipped to operate with either a 540RPM or 1000RPM PTO.

Warranty : 12months from the date of purchase by the original owner and in accordance with WECAN`s warranty policy.



16, Nangsannonggongdanji-gil, Nangsan-myeon,
Iksan-si, Jeollabuk-do, 54521, S.Korea

www.wecan21.com/eng

TEL. +82-63-862-5100~3 **FAX.** +82-63-862-5104

E-MAIL. wecanglobal21@gmail.com

WECAN GLOBAL
in Europe

ACRE ENGINEERING (WECAN UK LTD.)

NETHERCOTT CHULMLEIGH DEVON EX18 7LA UNITED KINGDOM TEL. +44-1769-580-600 URL. <http://www.agriculturalrotavators.co.uk>

WECAN GLOBAL
in Southeast Asia

FITCOREA TRADING PHILS INC.

38 C West Ave, Quezon City, 1104 Metro Manila, Philippines TEL. +63-929-700-2000 URL. <http://fitcorea.com>

WECAN GLOBAL
in Oceania

Australian Farming Company Pty Ltd

24 Diagonal Rd, Pooraka SA 5095, Australia TEL. +61-8-8262-3847 URL. <http://www.austarminaco.com.au>

WECAN GLOBAL
in South America

Covepa SpA.

Chorrillos 1349, Puerto Montt, X Region, Chile TEL. +56-65-270115 URL. <http://www.covepa.com/>