



COMPONENT ARRANGEMENT

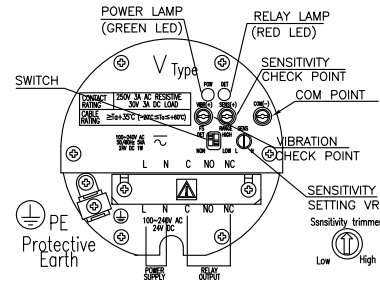

DESIGN DATA

CODE	N/A
UNIT	mm
KIND OF FLUID	—
PRESS.	DESIGN 20 (Max.) Kg/Cm OPERATING — Kg/Cm
TEMP. (SENSOR)	DESIGN -10 ~ 150°C (180°C OPTION) OPERATING —
TEMP. (ELECTRONICS)	DESIGN -10 ~ 60 OPERATING —
POWER SUPPLY	100~120/200 to 240AC 50/60Hz or 24V DC (OPTION)
ENCLOSURE	<input type="checkbox"/> WEATHER PROOF <input type="checkbox"/> EXPLOSION PROOF (Ex d IIC T6,IP65)
RELAY OUTPUT	1SPDT,250V 3A AC,30V 3A DC(RESISTIVE) C-NO : NORMALLY OPEN CONTACT C-NC : NORMALLY CLOSED CONTACT
DETECTION TIME DELAY	APPROX. 3 to 5 SECONDS FOR COVERED APPROX. 3 to 5 SECONDS FOR FREE
SENSITIVITY	BULK DENSITY OF 0.2g/cm2 (Min)
L	<input type="checkbox"/> 250 mm(STD) <input type="checkbox"/> OPTION (mm) Max. 1000mm
MOUNTING SIZE	PT 1-1/2"
TAG NO.	

NOTES

- INITIAL RESET TIME : APPROX. 15 SEC.
- L (REF. LENGTH = 330~4000)

REVISION

5	EXTENSION PIPE	304SS	1		
4	MOUNTING NIPPLE	304SS	1		
3	DETECTION PIPE	304SS	1		
2	COVER	ADC 12	1		
1	HOUSING	ADC 12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	—
PROJECT	—
TITLE	VIBRATION TYPE LEVEL SWITCH SVL-25-A-1-B-1-A-1 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.
SCALE	N/S
ERP CODE	0000
Work Order No.	—
REV.	
DWG NO.	SJ-M022-DWG-AP003

△					
△					
△					
△					
△	FOR APPROVAL				
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED