


ACOUSTIC SIGNALLERS

series
ETH 12

Protection	Gas	Zone	1-2	II2G	Ex d IIC T6 Gb
	Dusts		21-22	II2D	Ex tb IIIC T85°C Db

Degree of Protection	IP65
----------------------	------

Amb. Temp.	Standard		-20°C		+40°C
	Extended		-20°C		+55°C

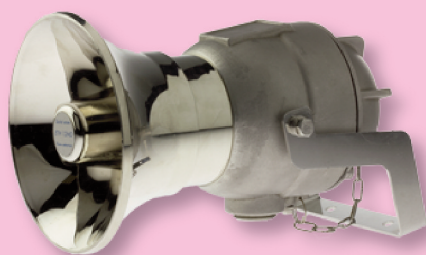

Entries Threading	EN 10226 (Gk)
-------------------	---------------

Material	Aluminum light alloy
----------	----------------------



Painting	External epoxy RAL7000
----------	------------------------

Standards and Certificates	Directive 2014/34/EU (ATEX)
	EN 60079-0 • EN 60079-1 EN 60079-31
	CE INERIS 02 ATEX 0074

- Specific for Acoustic alarm in closed ambients with low background noise.
- 32 selectable sounds.
- Continuous duty.
- External screws in Stainless Steel AISI 304.

Options

- Threading NPT ANSI.B1.20.1 (N) or Metric ISO 262 (M).
- Other colors.
- Fixing bracket.
- Other power supplies (48 VDC., 48 VAC., 110 VDC).

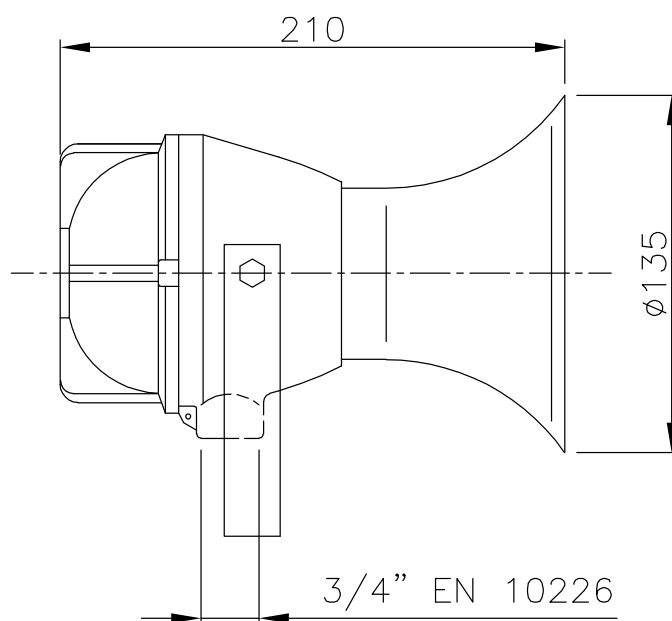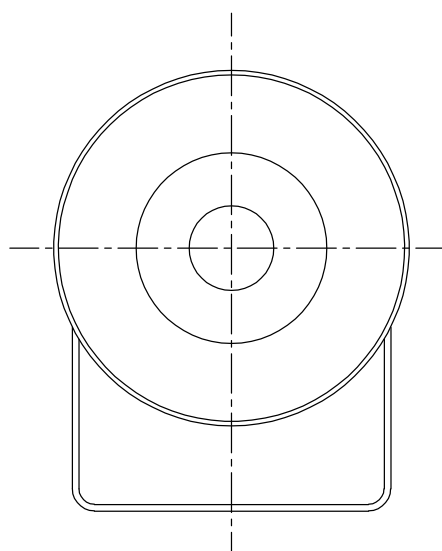

Code	Voltage (V)	Power (W)	Sound characteristics		Sound selection	Weight (kg)
			Frequency (Hz)	dB/m		
ETH 12MD/41	12÷24 AC/DC	4	400÷1600	102	Bi-tone YELP WAIL INTERMITTENT FIXED TONE	1,5
ETH 12MD/43	110 AC	4	400÷1600	106		1,5
ETH 12MD/44	230 AC	4	400÷1600	106		1,5