

Current Transformer (7.2kV)



- 옥내용 (For Indoor)
- 권선형 (Winding Type)
- 일반 계기 및 보호 계전기용 (For Metering & Protection)
- Dimensional Standard (DIN 42600-8)
- Epoxy Mold로 절연특성 강화
(Insulation : Epoxy Vacuum Molding)


■ For Metering

Type	WH 4 2 or WH 4 2 D	
Standard	KS C 1706	IEC 61869-2
Max. Voltage	7.2 kV	
Insulation Level	7.2 / 22 / 60 kV (6A)	7.2 / 20 / 60 kV
Short time Current Max. kA	40 kA / 1 sec.	
Rated Primary Current	1200 A 0 하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 40 VA	
Accuracy Class	1.0	
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 40 kg	

■ For Protection

Type	WH 4 2 R or WH 4 2 D R	
Standard	JEC 1201	IEC 61869-2
Max. Voltage	6.9 kV	7.2 kV
Insulation Level	6.9 / 22 / 60 kV	7.2 / 20 / 60 kV
Short time Current Max. kA	40 kA / 1 sec.	
Rated Primary Current	1200 A 0 하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 30 VA	
Accuracy Class	1P	5P, 10P
Over Current Factor	n > 10 or 20	n > 10 or 20
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 40 kg	

■ Dimension & Drawing

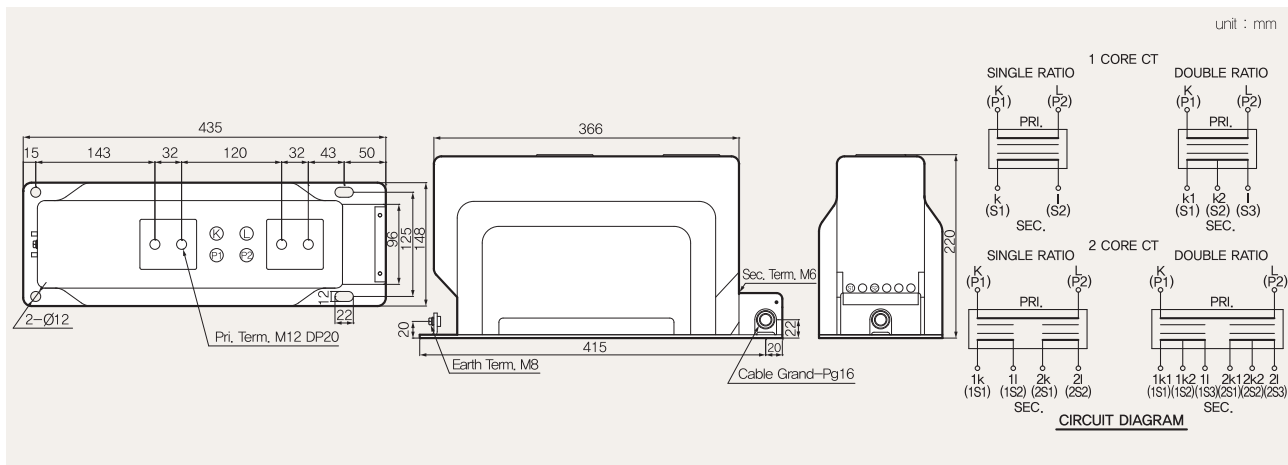

Specification

Service	Type	Short time Current	Current Ratio (A)	KS C 1706		JEC 1201			IEC 61869-2		
				Class	Burden	Class	Burden	n >	Class	Burden	n >
Metering	WH42 (1 Core Single Ratio)	8 kA	20 ~ 1200 / 5	1.0	15	—	—	—	1.0	15	—
		12.5 kA	30 ~ 1200 / 5								
		25 kA	60 ~ 1200 / 5								
		31.5 kA	75 ~ 1200 / 5								
		40 kA	100 ~ 1200 / 5								
		8 kA	25 ~ 1200 / 5	1.0	40	—	—	—	1.0	30	—
		12.5 kA	40 ~ 1200 / 5								
		25 kA	75 ~ 1200 / 5								
		31.5 kA	100 ~ 1200 / 5								
		40 kA	100 ~ 1200 / 5								
Protection	WH42R (1 Core Single Ratio)	8 kA	20 ~ 1200 / 5	—	—	1P	15	10	5P 10P	15	10
		12.5 kA	30 ~ 1200 / 5								
		25 kA	60 ~ 1200 / 5								
		31.5 kA	75 ~ 1200 / 5								
		40 kA	100 ~ 1200 / 5								
		8 kA	25 ~ 1200 / 5	—	—	1P	15 25	20 10	5P 10P	15 30	20 10
		12.5 kA	40 ~ 1200 / 5								
		25 kA	75 ~ 1200 / 5								
		31.5 kA	100 ~ 1200 / 5								
		40 kA	100 ~ 1200 / 5								
		8 kA	40 ~ 1200 / 5	—	—	1P	25	20	5P 10P	30	20
		12.5 kA	75 ~ 1200 / 5								
		25 kA	150 ~ 1200 / 5								
		31.5 kA	200 ~ 1200 / 5								
		40 kA	200 ~ 1200 / 5								
Metering & Protection	2WH42R (2 Core Single Ratio)	8 kA	20 ~ 1200 / 5 / 5	—	—	1.0/1P	15/15	10	1.0/5P 1.0/10P	15/15	10
		12.5 kA	40 ~ 1200 / 5 / 5								
		25 kA	75 ~ 1200 / 5 / 5								
		31.5 kA	100 ~ 1200 / 5 / 5								
		40 kA	100 ~ 1200 / 5 / 5								
		8 kA	30 ~ 1200 / 5 / 5	—	—	1.0/1P	15/15 25/25	20 10	1.0/5P 1.0/10P	15/15 30/30	20 10
		12.5 kA	50 ~ 1200 / 5 / 5								
		25 kA	100 ~ 1200 / 5 / 5								
		31.5 kA	150 ~ 1200 / 5 / 5								
		40 kA	150 ~ 1200 / 5 / 5								
		8 kA	60 ~ 1200 / 5 / 5	—	—	1.0/1P	25/25	20	1.0/5P 1.0/10P	30/30	20
		12.5 kA	100 ~ 1200 / 5 / 5								
		25 kA	200 ~ 1200 / 5 / 5								
		31.5 kA	300 ~ 1200 / 5 / 5								
		40 kA	300 ~ 1200 / 5 / 5								

※ IEEE C 57.13 규격에 의한 제품의 생산이 가능하며, 계급, 부담, 과전류 정수 등의 사양변경에 따라 다양한 생산도 가능합니다.

Can manufacture the products based on IEEE C 57.13 standards, and also Can manufacture the various products by change of specification, such as the Accuracy class, Burden and Over-current factor.

※ 이중비 CT의 생산이 가능하므로 주문 시 협의 바랍니다.(WH42D, WH42DR, 2WH42DR)

Can manufacture the double ratio CT. Please ask us before, you order it.