

MP-18-27/MP-18

2MP HD-SDI Indoor Dome Camera

HD-SDI
EX-SDI




Features

- 1/3" 2MP Panasonic CMOS sensor
- 1080p@60/50fps, 1080p@30/25fps, 720p@60/50fps, 720p@30/25fps
- HD-SDI, EX-SDI, CVBS
- 2.8~10mm Mega-pixel Varifocal Lens
- Real-time True WDR
- Digital Noise Reduction(2D+3D)
- Digital Slow Shutter
- Digital Image Stabilizer
- Privacy Mask Function
- High Light Compensation
- Defog Function
- ACE(Digital WDR)
- Multiple Protocols
- 27pcs IR LED(IR Distance 22~23m, MP-18-27 only)

Dimensions

Unit : mm

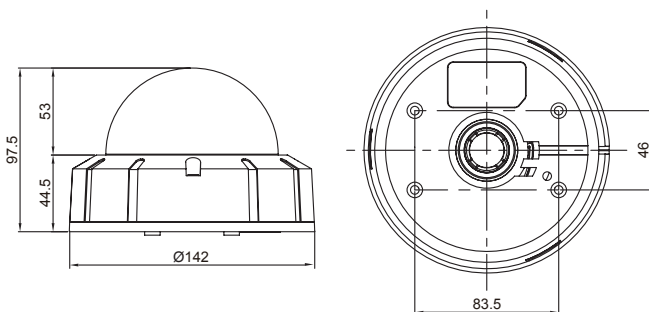

CAMERA	
Image Sensor	1/3" Panasonic CMOS Sensor
Total Pixels	1956 (H) x 1266 (V) = 2.48M Pixels
Active Pixels	1944 (H) x 1092 (V) = 2.12M Pixels
Video Format	1080p@60/50fps, 1080p@30/25fps, 720p@60/50fps, 720p@30/25fps
Min. Illumination	Color : 0.5 lux , BW : 0.1lux / 0lux(with IR LEDs) Color DSS : 0.002 lux , BW DSS : 0.001 lux / 0lux(with IR LEDs)
S/N Ratio	more than 50dB (AGC off)
Video Output	HD-SDI, EX-SDI, CVBS

LENS	
Lens Type	2.8~10mm Mega-pixel Varifocal Lens

CAMERA FUNCTIONS	
Camera Title	ID / Title / Zoom Ratio / System Message
Day & Night	Auto / Day / Night / Ext-in
WDR/BLC	Off / WDR / BLC / HLC
ACE	Off / Low / Middle / High
DNR	Auto / Off / Low / Middle / High
Defog	Off / On(Auto / Manual)
Digital Image Stabilizer	Off / On
Motion Detection	Off / On (3 positions)
Privacy Mask	Off / On (24 positions)
Digital Slow Shutter	Off /x2 /x4
Gain Control	Off / On
White Balance	Auto / One Push / Manual / Indoor / Outdoor
Shutter Speed	1/30(25) ~ 1/30,000 sec
E.Zoom	Off / x2 ~ x32
Digital Flip	Off / H / V / H&V

GENERAL	
Power Source	DC12V±10%
Power Consumption	MP-18 : Max 350mA, MP-18-27 : Max 700mA
Operating Temperature	-10°C ~ +50°C / 0% ~ 90% RH
Dimensions	142(Ø) x 97.5(H) mm
Weight	0.36Kg

IP PTZ

IP IR CAM

IP BOX

IP CAM

HD PTZ

HD IR CAM

HD BOX

HD CAM

AHD CAM

CONTROLLER

MULTI TESTER