


4-4 누름 버튼 스위치 Push Button Switch 형식 구분도 | Type Classification Diagram | ※ 링의 형태에 각형은 흑색(캡색상) 제작 불가합니다. (Square type of ring with black color(Color of Cap) is not manufactured.) 성능 개요 | Performance Summary | | | | |------------------------------|------------------------------------| | 정격용량 (Rated capacity) | AC250V 6A | | 절연저항 (Insulation resistance) | Above 100MΩ (DC 500V. Meg) | | 접촉저항 (Contact resistance) | Below 50mΩ (Initial value) | | 내전압 (Withstand voltage) | AC 2,500V/min | | 기계적수명 (Mechanical lifetime) | Above 500,000 times (20 times/min) | | 전기적수명 (Electrical lifetime) | Above 100,000 times (20 times/min) | | 스트로크 (Stroke) | 3.0mm | | 작동에 필요한 힘 (Operating force) | 200 ~ 350g | | 사용주위온도 (Ambient temperature) | -20℃ ~ +55℃ | | 상대습도 (Relative humidity) | 45 ~ 85% | 부품 재질 | Part Materials | | 부품 (Part) | 재질 (Materials) | |---------------|---------------------------------------| | 몸체 (Body) | PC 수지 (Polycarbonate resin) | | 홀다 (Holder) | ABS 내열 수지 (Heat resistance ABS resin) | | 접점 (Contact) | 은접점 (Silver) | | 단자 (Terminal) | 황동 (Brass) | | 볼트 (Bolt) | 탄소강 (Carbon Steel) | | CAP | PC 수지 (Polycarbonate resin) | | 스프링 (Spring) | 스테인레스 (Stainless steel) | | 링 (Ring) | ABS 수지 (ABS resin) | 170 YongSung Electric Co., Ltd.


외형 / 치수도 | Shape / Dimension Drawing |

(unit : mm)


Round Full (RF)

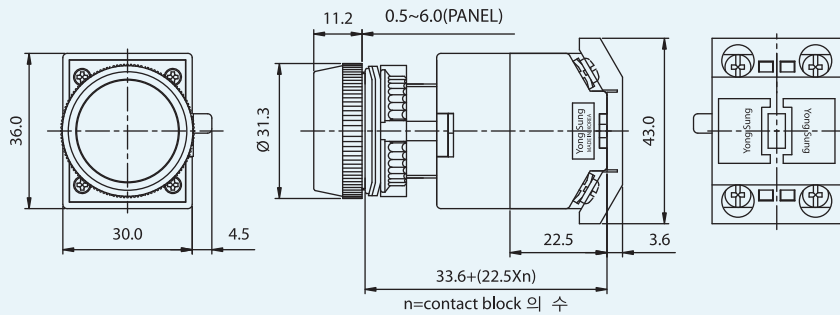


Round Half (RH)

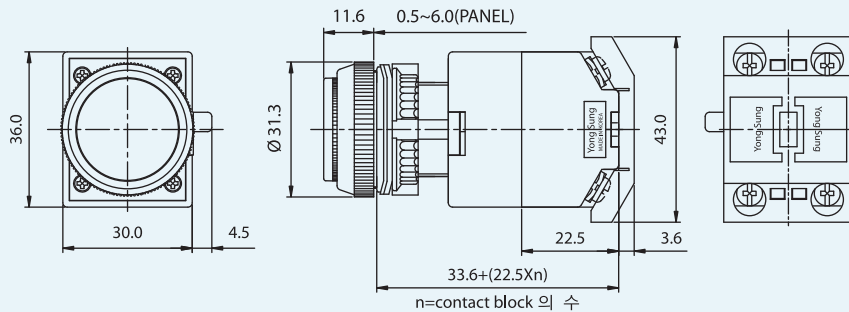

사각형 (S)

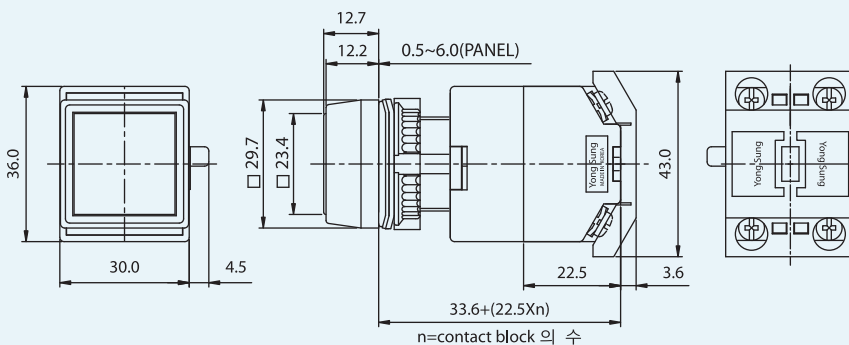

방향지시형 (SD)

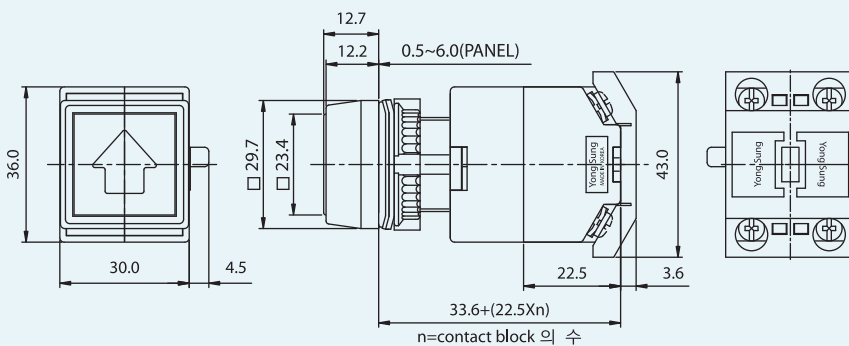

Ø22
시리즈

