


Voltage Transformer (3.45kV)



- 옥내용
For Indoor
- 단상 비접지형
Single Phase,
Line to Line Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Vacuum Molding.

■ Dimension & Drawing

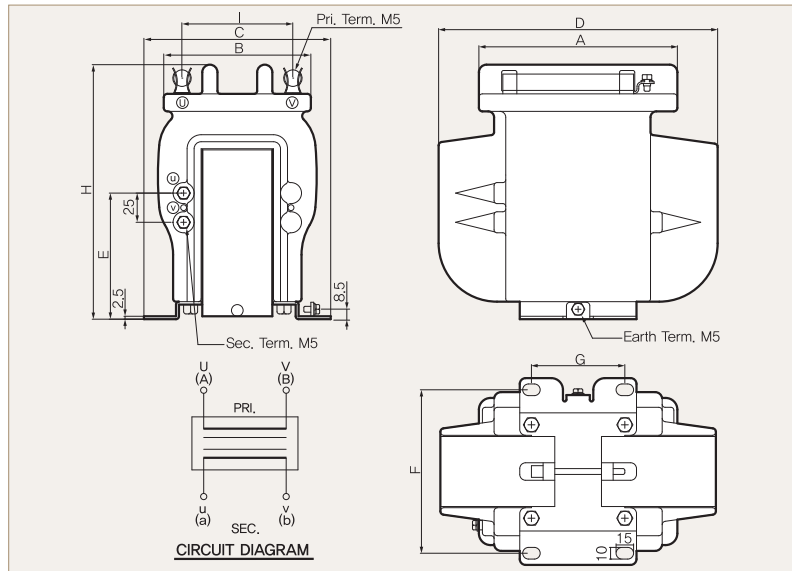

unit : mm

Type	A	B	C	D	E	H	F	G	I
LM22	150	116	140	151	82	188	120	80	85
LM23				173	98	204			85
LM25	170	126	160	197	100	206	140		95
LM26				239	108	218			95

■ Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Max. Voltage	3,45 kV	3,45 kV	3,6kV
Primary Voltage	3300 V		
Secondary Voltage	110 V		
Insulation Level	3,45 / 16 / 45 kV(3A)	3,45 / 16 / 45 kV	3,6 / 10 / 40 kV
Over Voltage Factor	1,1Vn Continuous		1,2Vn Continuous
Frequency	60 Hz (Others on request)		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ VT Fuse는 별매품입니다. If user wants to change the fuse, can be make an extra cost.

■ Rated Output

Accuracy Class			Type & Rated Output Burden			
KS C 1706	JEC 1201	IEC 61869-3	LM22	LM23	LM25	LM26
0,5	—	0,5	—	50	100	200
1,0	1P	1,0	50	100	200	300 or 500
3,0	3P	3,0	—	—	—	1000
Weight			≒ 7,0 kg	≒ 9,0 kg	≒ 12,0 kg	≒ 17,0 kg

※ TL26 Type 3,0, 1000VA도 생산 가능합니다.

■ 1'ry / 2'ry Voltage : 생산 전압비 (Option)

1차 전압 (V)	2차 전압 (V)
1100, 2200, 3300, 3600	63,5, 110, 120, 190, 220