



Voltage Transformer (1.15kV)

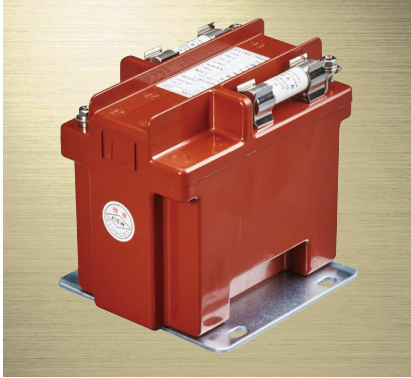

- 옥내용
For Indoor
- 단상 비접지형
Single Phase,
Line to Line Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Molding.

■ Dimension & Drawing

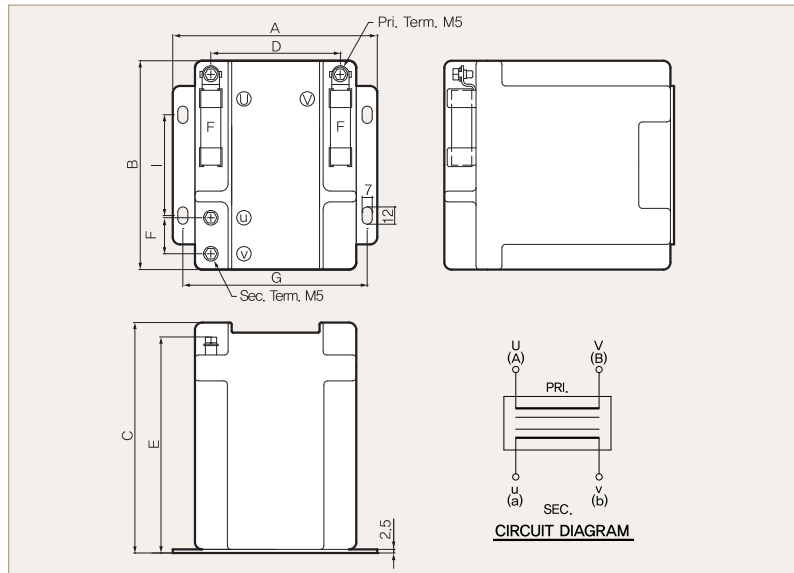

unit : mm

Type	A	B	C	D	E	F	G	I
LL22	114	120	102	65	92	20	100	70
LL23		132	122	62	112	25		
LL25			160	66	150			
LL26	142	145		90				

■ Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Max. Voltage	0.23 ~ 1.15 kV	0.23 ~ 1.15 kV	0.72kV
Primary Voltage	110 ~ 480 V		
Secondary Voltage	110 V		
Insulation Level	2 ~ 4 kV	2 ~ 4 kV	0.72kV / 3 / - kV
Over Voltage Factor	1.1Vn Continuous		1.2Vn Continuous
Frequency	60 Hz (Others on request)		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ VT Fuse는 별매품입니다. If user wants to change the fuse, can be make an extra cost.

■ Rated Output

Accuracy Class			Type & Rated Output Burden			
KS C 1706	JEC 1201	IEC 61869-3	LL22	LL23	LL25	LL26
0.5	—	0.5	15 or 25	50	100	200
1.0	1P	1.0	50	100	200	300 or 500
Weight			≒ 3.5 kg	≒ 4.5 kg	≒ 6.5 kg	≒ 9.5 kg

■ 1'ry / 2'ry Voltage : 생산 전압비 (Option)

1차 전압 (V)	2차 전압 (V)
63.5, 110, 190, 220, 240, 380, 440, 460, 480	63.5, 110, 120, 190, 220