


WIRING DIAGRAM

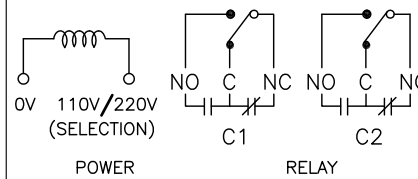

## DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	1(Max.)	Kg/Cm <sup>2</sup>
	OPERATING	—	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	−10 ~ 80	°C
	OPERATING	—	°C
TEMP. (ELECTRONICS)	DESIGN	−10 ~ 60	°C
	OPERATING	—	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	AC110V/220V ±10, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
OUTPUT	1 DPDT		
VISCOSITY	1Pa.s/10P Less		
MOISTURE	Max 80%RH		

L	<input type="checkbox"/> 250 mm
	<input checked="" type="checkbox"/> OPTION (      mm ) Max. 1000mm
TAG NO.	—

## NOTES

## REVISION

5	HEAD	ADC12	1		
4	FLANGE	304SS	1		
3	EARTH ROD	304SS	1		
2	INSULATOR	UHMW-PE	1		
1	MEASURING ROD	304SS	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

## BILL OF MATERIAL

CUSTOMER	—				
PROJECT	—				
TITLE	CAPACITANCE TYPE LEVEL SWITCH SCAP-1-A-1-B-1-A-1 ASSEMBLY DRAWING				
MANUFACTURER	SeoJin Instech Co., Ltd.				
SCALE		ERP CODE	0000	Work Order No.	—
N/S	DWG NO.	SJ-M024-DWG-AP004			

△					
△					
△					
△					
△	FOR APPROVAL				
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED