


WIRING DIAGRAM

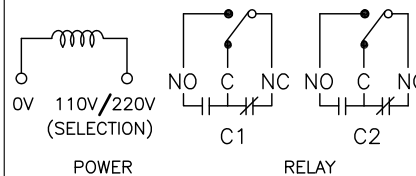

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	1(Max.)	Kg/Cm ²
	OPERATING	-	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	-10 ~ 230	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-10 ~ 60	°C
	OPERATING	-	°C
CONTACT RATING	250V AC, 5A		
POWER SUPPLY	AC110V/220V ±10, 50/60Hz		
ENCLOSURE	WEATHER PROOF		
OUTPUT	1 DPDT		
VISCOSITY	1Pa.s/10P Less		
MOISTURE	Max 80%RH		
L	<input checked="" type="checkbox"/> 250 mm		
	<input type="checkbox"/> OPTION (mm) Max. 1000mm		
TAG NO.	-		

NOTES

REVISION

6	HEAD	ADC12	1		
5	RADIATION PLATE	AL	3		
4	FLANGE	304SS+TEFLON	1		
3	EARTH ROD	304SS+TEFLON	1		
2	INSULATOR	UHMW-PE	1		
1	MEASURING ROD	304SS	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	-			
PROJECT	-			
TITLE	CAPACITANCE TYPE LEVEL SWITCH SCAP-1-C-2-B-1-A-1 ASSEMBLY DRAWING			
MANUFACTURER	SeoJin Instech Co., Ltd.			
SCALE		ERP CODE	0000	Work Order No. -
REV.	-			
N/S	DWG NO.	SJ-M024-DWG-AP006		

△					
△					
△					
△					
△	FOR APPROVAL				
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED