

**VISUAL EX-PROOF TYPE (RNV-EX VA100APS-\*\*\*)**


**- EX-PROOF TYPE**



**Features**

Explosion-proof type is installed in a place where the explosion is present to prevent the explosion of product.

**Dimension**

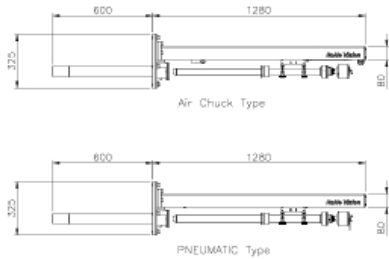

**Specification**

Vision Tube	
Image Sensor	1/3"Color CMOS
Resolution	1.3M
Video Output	AHD 1.0 / CVBS
Power supply	DC12V, 150mA
Angle of view	Straight View : 45°(50°,100°,150° Optional) Elbow View : 70°
Length(mm)	1000mm (500~2000mm Optional)
Operating Max. Temperature	Max 2,000°C

※ Available to choose cooling type between air cooling or air-water cooling.

Retract Controller		
Product Type	Pneumatic	Air Chuck
System	Pneumatic	Wind-up Spring
Operating Distance	Max 2,000mm	
Operating Time	Within 3 sec	Max 0.2 sec
Operating Conditions	When the power supplying disconnected or the air pressure is lower than the set value	

Control Unit	
Dimension(mm)	440(W)X1800(H)X450(D)
Power	AC 110V or 220V(50~60Hz)
Solenoid Power	DC 24V

※ Above specifications may differ depending on application environment.

※ The dimension will be subject to installation site.