

Current Transformer (25.8kV)



- 옥내용 (For Indoor)
- 권선형 (Winding Type)
- 일반 계기 및 보호 계전기용 (For Metering & Protection)
- Epoxy Mold로 절연특성 강화
(Insulation : Epoxy Vacuum Molding)


■ For Metering

Type	WE9A or WE9DA	
Standard	KS C 1706	IEC 61869-2
Max. Voltage	25.8 kV	24 kV
Insulation Level	25.8 / 50 / 125 kV (20 B)	24 / 50 / 125 kV
Short time Current Max. kA	40 kA / 1 sec.	
Rated Primary Current	800 A or 800 / 400 A 이하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 40 VA	
Accuracy Class	1.0	
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 30kg	

■ For Protection

Type	WE9RA or WE9DRA	
Standard	JEC 1201	IEC 61869-2
Max. Voltage	23 kV	24 kV
Insulation Level	23 / 50 / 125 kV	24 / 50 / 125 kV
Short time Current Max. kA	40 kA / 1 sec.	
Rated Primary Current	800 A or 800 / 400A 이하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 40 VA	
Accuracy Class	1P	5P, 10P
Over Current Factor	n > 10 or 20	n > 10 or 20
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 30kg	

■ Dimension & Drawing

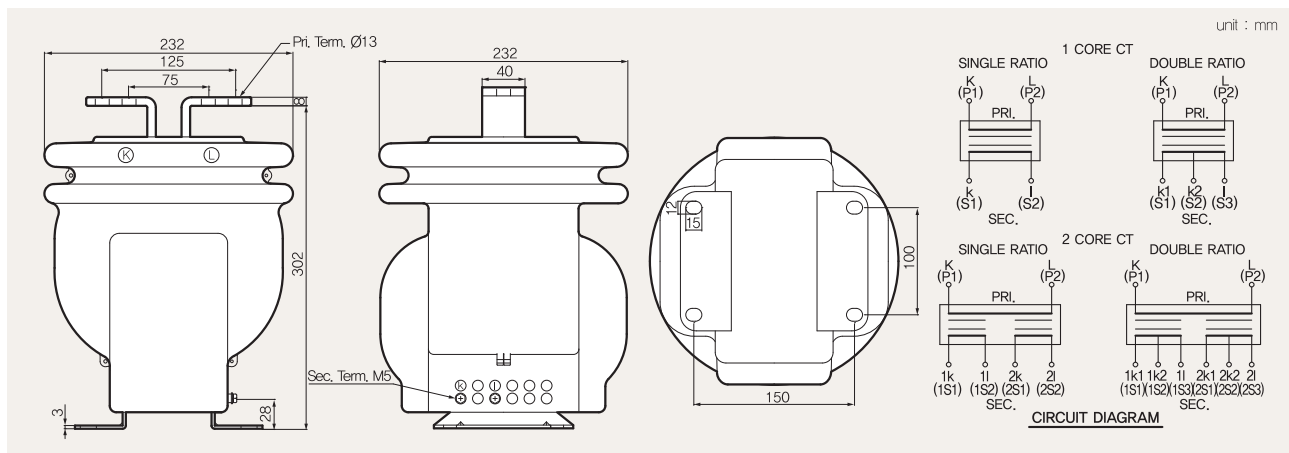

■ Specification

Service	Type	Short time Current	Current Ratio (A)	KS C 1706		JEC 1201			IEC 61869-2		
				Class	Burden	Class	Burden	n >	Class	Burden	n >
Metering	WE9A (1 Core Single Ratio)	75 In	400 ~ 500 / 5	0.5 1.0	15 40	— —	— —	— —	0.5 1.0	15 30	— —
		150 In	200 ~ 250 / 5								
		300 In	100 ~ 120 / 5								
		8 kA	10 ~ 25 / 5								
		12.5 kA	15 ~ 30 / 5								
		25 kA	25 ~ 75 / 5								
		31.5 kA	40 ~ 800 / 5								
		40 kA	50 ~ 800 / 5								
	WE9DA (1 Core Double Ratio)	75 In	400,200 ~ 500,250 / 5	0.5 1.0	15 40	— —	— —	— —	0.5 1.0	15 30	— —
		150 In	200,100 ~ 240,120 / 5								
		300 In	10,5 ~ 120,60 / 5								
		8 kA	20,10 ~ 50,25 / 5								
		12.5 kA	30,15 ~ 60,30 / 5								
		25 kA	50,25 ~ 60,30 / 5								
		31.5 kA	80,40 ~ 800,400 / 5								
		40 kA	100,50 ~ 800,400 / 5								
Protection	WE9RA (1 Core Single Ratio)	75 In	400 ~ 500 / 5	— —	— —	1P 1P	15 40	10 10	5P 10P	15 30	10 10
		150 In	200 ~ 250 / 5								
		300 In	5 ~ 120 / 5								
		8 kA	10 ~ 25 / 5								
		12.5 kA	15 ~ 30 / 5								
		25 kA	25 ~ 75 / 5								
		31.5 kA	40 ~ 800 / 5								
		40 kA	50 ~ 800 / 5								
		75 In	400 ~ 500 / 5								
		150 In	200 ~ 250 / 5								
		300 In	5 ~ 120 / 5								
		8 kA	15 ~ 25 / 5								
		12.5 kA	20 ~ 30 / 5								
		25 kA	40 ~ 75 / 5								
		31.5 kA	60 ~ 800 / 5								
		40 kA	75 ~ 800 / 5								
	WE9RA (1 Core Single Ratio)	75 In	400 ~ 500 / 5	— —	— —	1P 1P	40 40	20 20	5P 10P	30 30	20 20
		150 In	5 ~ 250 / 5								
		300 In	5 ~ 120 / 5								
		8 kA	30 ~ 50 / 5								
		12.5 kA	40 ~ 60 / 5								
		25 kA	75 ~ 150 / 5								
		31.5 kA	120 ~ 800 / 5								
		40 kA	150 ~ 800 / 5								

Current Transformer (25.8kV)

■ Specification

Service	Type	Short time Current	Current Ratio (A)	KS C 1706		JEC 1201			IEC 61869-2		
				Class	Burden	Class	Burden	n >	Class	Burden	n >
Protection	WE9DRA (1 Core Double Ratio)	75 In	400,200 ~ 500,250 / 5	—	—	1P	40	10/5	5P	30	10/5
		150 In	200,100 ~ 240,120 / 5								
		300 In	10,5 ~ 120,60 / 5								
		8 kA	30,15 ~ 50,25 / 5								
		12,5 kA	40,20 ~ 60,30 / 5								
		25 kA	80,40 ~ 60,30 / 5								
		31,5 kA	100,50 ~ 800,400 / 5								
		40 kA	150,75 ~ 800,400 / 5								
		40 In	10,5 ~ 800,400 / 5					20/10	10P	30	20/10
		75 In	400,200 ~ 500,250 / 5								
		150 In	10,5 ~ 120,60 / 5								
		300 In	10,5 ~ 120,60 / 5								
		8 kA	30,15 ~ 100,50 / 5								
		12,5 kA	40,20 ~ 120,60 / 5								
		25 kA	80,40 ~ 150,75 / 5								
		31,5 kA	150,75 ~ 800,400 / 5								
		40 kA	150,75 ~ 800,400 / 5								
Metering & Protection	2WE9RA (2 Core Single Ratio)	40 In	5 ~ 800 / 5 / 5	—	—	1P	15/15	10	1,0/5P 1,0/10P	15/15	10
		75 In	5 ~ 500 / 5 / 5								
		150 In	5 ~ 250 / 5 / 5								
		300 In	5 ~ 120 / 5 / 5								
		8 kA	15 ~ 800 / 5 / 5								
		12,5 kA	20 ~ 800 / 5 / 5								
		25 kA	40 ~ 800 / 5 / 5								
		31,5 kA	50 ~ 800 / 5 / 5								
		40 kA	60 ~ 800 / 5 / 5								
		40 In	5 ~ 800 / 5 / 5	—	—	1P	15/15 40/40	20 10	1,0/5P 1,0/10P	15/15 30/30	20 10
		75 In	5 ~ 500 / 5 / 5								
		150 In	5 ~ 250 / 5 / 5								
		300 In	5 ~ 120 / 5 / 5								
		8 kA	25 ~ 800 / 5 / 5								
		12,5 kA	30 ~ 800 / 5 / 5								
		25 kA	50 ~ 800 / 5 / 5								
		31,5 kA	80 ~ 800 / 5 / 5								
		40 kA	100 ~ 800 / 5 / 5								
		40 In	5 ~ 800 / 5 / 5	—	—	1P	40/40	20	1,0/5P 1,0/10P	30/30	20
		75 In	5 ~ 500 / 5 / 5								
		150 In	5 ~ 250 / 5 / 5								
		8 kA	50 ~ 800 / 5 / 5								
		12,5 kA	60 ~ 800 / 5 / 5								
		25 kA	120 ~ 800 / 5 / 5								
		31,5 kA	150 ~ 800 / 5 / 5								
		40 kA	200 ~ 800 / 5 / 5								

Specification

Service	Type	Short time Current	Current Ratio (A)	KS C 1706		JEC 1201			IEC 61869-2		
				Class	Burden	Class	Burden	n >	Class	Burden	n >
Metering & Protection	2WE9DRA (2 Core Double Ratio)	40In	10,5 ~ 800,400 / 5 / 5	—	—	1P	15/15	10/5	1.0/5P 1.0/10P	15/15	10/5
		75 In	10,5 ~ 500,250 / 5 / 5								
		150 In	10,5 ~ 240,120 / 5 / 5								
		300 In	10,5 ~ 120,60 / 5 / 5								
		8 kA	30,15 ~ 800,400 / 5 / 5								
		12,5 kA	40,20 ~ 800,400 / 5 / 5								
		25 kA	60,30 ~ 800,400 / 5 / 5								
		31,5 kA	120,60 ~ 800,400 / 5 / 5								
		40 kA	120,60 ~ 800,400 / 5 / 5								
		40 In	10,5 ~ 800,400 / 5 / 5	—	—	1P	15/15 40/40	20/10 10/5	1.0/5P 1.0/10P	15/15 30/30	20/10 10/5
		75 In	10,5 ~ 500,250 / 5 / 5								
		150 In	10,5 ~ 240,120 / 5 / 5								
		300 In	10,5 ~ 120,60 / 5 / 5								
		8 kA	30,15 ~ 800,400 / 5 / 5								
		12,5 kA	60,30 ~ 800,400 / 5 / 5								
		25 kA	100,50 ~ 800,400 / 5 / 5								
		31,5 kA	200,100 ~ 800,400 / 5 / 5								
		40 kA	200,100 ~ 800,400 / 5 / 5								
		40 In	10,5 ~ 800,400 / 5 / 5	—	—	1P	40/40	20/10	1.0/5P 1.0/10P	30/30	20/10
		75 In	10,5 ~ 500,250 / 5 / 5								
		150 In	10,5 ~ 240,120 / 5 / 5								
		8 kA	40,20 ~ 800,400 / 5 / 5								
		12,5 kA	80,40 ~ 800,400 / 5 / 5								
		25 kA	150,75 ~ 800,400 / 5 / 5								
		31,5 kA	300,150 ~ 800,400 / 5 / 5								
		40 kA	300,150 ~ 800,400 / 5 / 5								

※ IEEE C 57.13 규격에 의한 제품의 생산이 가능하며, 계급, 부담, 과전류 정수 등의 사양변경에 따라 다양한 생산도 가능합니다.

Can manufacture the products based on IEEE C 57.13 standards, and also Can manufacture the various products by change of specification, such as the Accuracy class, Burden and Over-current factor.

※ 단시간 과전류값은 2차측에 정격 부담의 25% 부담을 접속한 상태에서의 보증치입니다.

Short time current being subject to 25% rated burden connection at secondary side for all ratios.