


ACOUSTIC SIGNALLERS

series
ETS 60

Protection	Gas	Zone	1-2	II2G	Ex d IIC T6
	Dusts		n.a.	n.a.	n.a.

Degree of Protection	IP65
----------------------	------

Amb. Temp.	Standard	-20°C	+40°C
	Extended	n.a.	n.a.

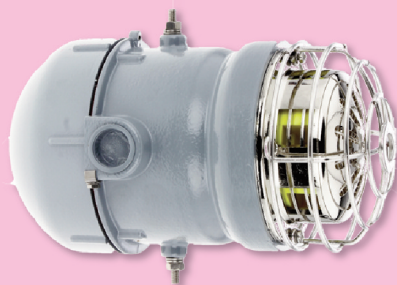

Entries Threading	EN 10226 (Gk)
-------------------	---------------

Material	Aluminum light alloy
----------	----------------------



Painting	External epoxy RAL7000
----------	------------------------

Standards and Certificates	Directive 2014/34/EU (ATEX)
	EN 60079-0 • EN 60079-1 EN 61241-0 • EN 61241-1
	CE INERIS 02 ATEX 0001

- Specific for potentially explosive atmospheres (chemical plants and refineries, pumping stations, painting plants, silos and movement of wheat) and/or anywhere there may be the presence of dust.
- Intermittent duty S3 ON 1 min - 10 min OFF, according to EN 60034-1.
- External screws in Stainless Steel AISI 304.
- Protecting Cage included.

Options

- Threading NPT ANSI.B1.20.1 (N) or Metric ISO 262 (M).
- Other colors.
- Mounting bracket for installation.

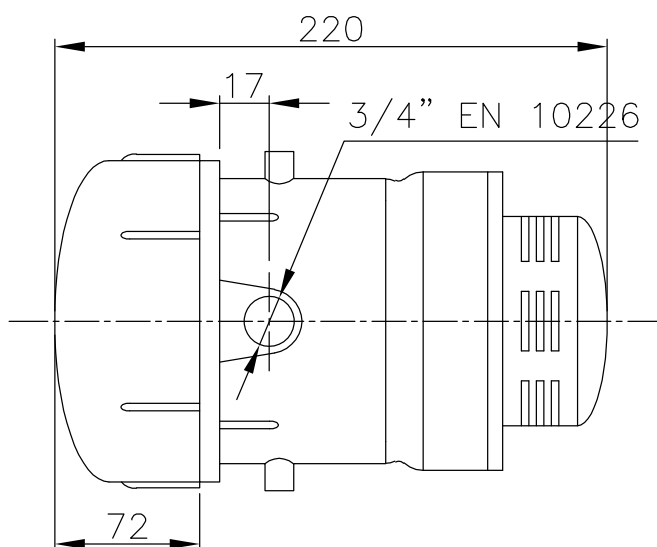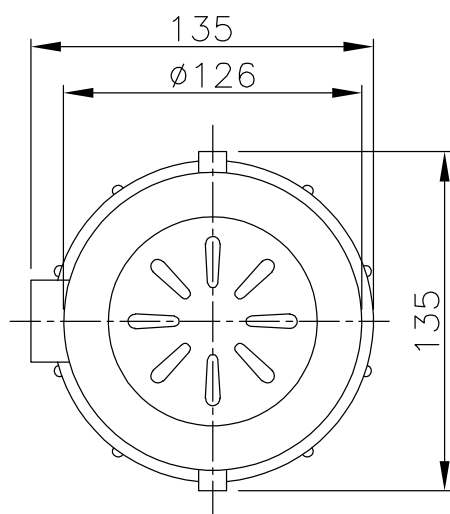

Code	Voltage (V)	Power (W)	Sound characteristics		Weight (kg)
			Frequency (Hz)	Sound Intensity (dB/m)	
ETS 60/01	12 AC/DC	130	1150	109	2,30
ETS 60/1	24 AC/DC	130	1250	109	2,30
ETS 60/2	48 AC/DC	130	1300	109	2,30
ETS 60/3	110 AC/DC	130	1300	109	2,30
ETS 60/4	230 AC/DC	130	1300	109	2,30

ACOUSTIC SIGNALLERS (SIREN)

series
ETS 60 114

Protection	Gas	Zone	1-2	II2G	Ex d IIC T6
	Dusts	Zone	21-22.	II2D	Ex tD A21 T85°C

Degree of Protection	IP65
----------------------	------

Amb. Temp.	Standard	-20°C	+40°C
Extended	-50°C	+50°C	



Entries Threading	EN 10226 (Gk)
-------------------	---------------



Material	Aluminum light alloy
----------	----------------------

Painting	External epoxy RAL7000
----------	------------------------

Standards and Certificates	Directive 2014/34/EU (ATEX)	
	EN 60079-0 • EN 60079-1 EN 61241-0 • EN 61241-1	
	CE INERIS 02 ATEX 0001	

- Specific for potentially explosive atmospheres (chemical plants and refineries, pumping stations, painting plants, silos and movement of wheat) and/or anywhere there may be the presence of dust.
- For their strong power they are most used where there is a significant background noise.
- Intermittent duty S3 ON 1 min - 10 min OFF, according to EN 60034-1.
- External screws in Stainless Steel AISI 304.

Options	- Threading NPT ANSI.B1.20.1 (N) or Metric ISO 262 (M).	- Mounting bracket for installation.
	- Other colors.	

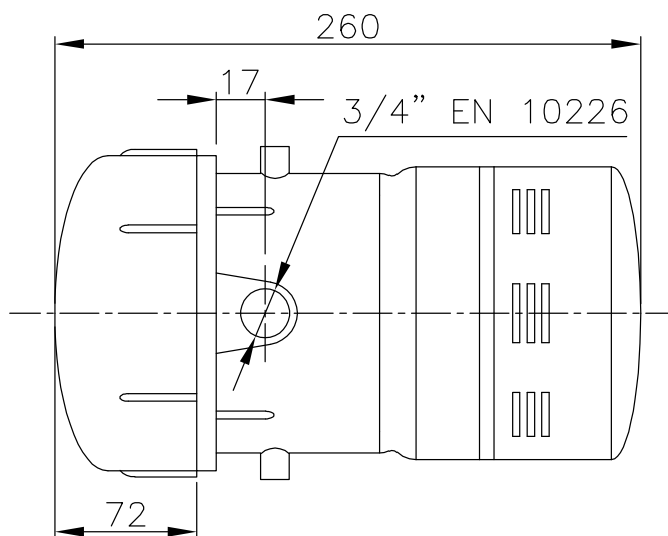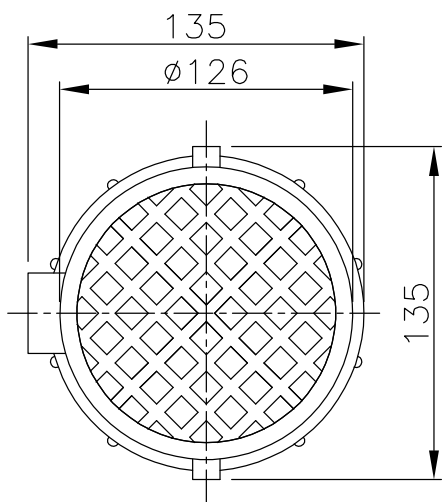

Code	Voltage (V)	Power (W)	Sound characteristics		Weight (kg)
			Frequency (Hz)	Sound Intensity (dB/m)	
ETS 60 114/01	12 AC/DC	140	650	114	2,30
ETS 60 114/1	24 AC/DC	140	650	114	2,30
ETS 60 114/3	110 AC	200	650	114	2,30
ETS 60 114/4	230 AC	200	650	114	2,30