


1> 1Point (Alarm-SPDT) : HH or LL Alarm

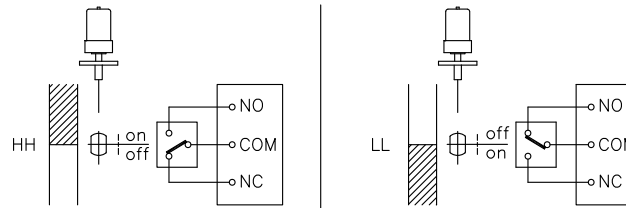

## DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	Max. 10	Kg/Cm <sup>2</sup>
	OPERATING	—	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	−40 ~ 120	°C
	OPERATING	—	°C
TEMP. (ELECTRONICS)	DESIGN	−40 ~ 80	°C
	OPERATING	—	°C
SP.GR.	0.7 ~ 1.3		
ENCLOSURE	WEATHER PROOF		
FLANGE SIZE	ANSI 150# 4" RF		
DISPLACER SIZE	ø76.3x98L		
CONTACT RATING	250V AC 10A		

TAG NO.	L	L1	L2	L3	L4
			-	-	-
			-	-	-
			-	-	-
			-	-	-

## NOTES

6	DISPLACER	304SS	1		
5	CHAIN	304SS	1		
4	FLANGE	304SS	1	ANSI 150# 4" RF	
3	STEM	304SS	1		
2	HOUSING	ADC12	1		
1	HOUSING COVER	C.S	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

## BILL OF MATERIAL

CUSTOMER	-
----------	---

PROJECT	-
---------	---

TITLE	DISPLACEMENT TYPE LEVEL SWITCH SMC-1-A-1-OP-1-A ASSEMBLY DRAWING
-------	--

MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>
--------------	---------------------------------

SCALE	Work Order No.	REV.
-------	----------------	------

N/S	DWG NO.	SJ-M013-DWG-AP025	△
-----	---------	-------------------	---

△					
△					
△					
△					
△	FOR APPROVAL	2021.06.14	K.I.CHOI	D.N.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED