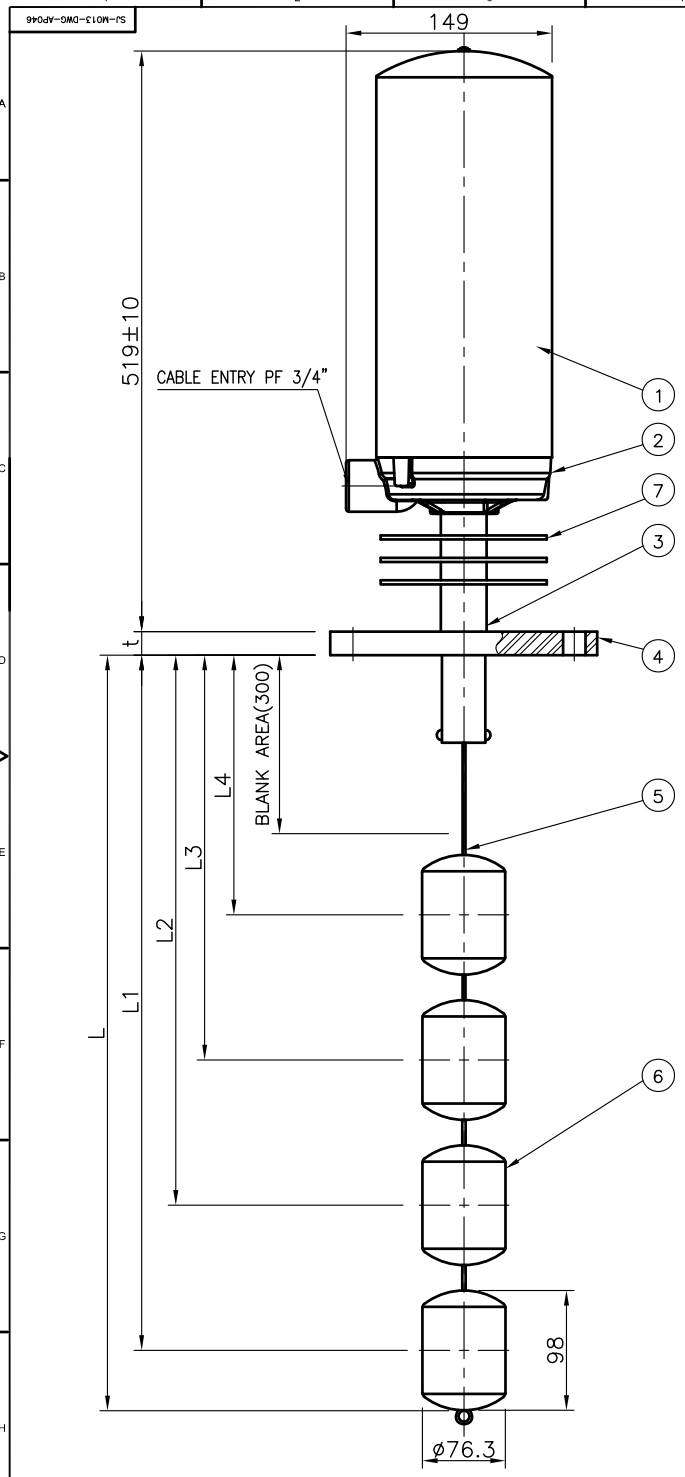

11> 4Point(Alarm and Control–SPDT) : HH, LL and Conrol



DESIGN DATA

CODE		N/A	
UNIT		mm	
KIND OF FLUID		–	
PRESS.	DESIGN	Max. 30	Kg/Cm²
	OPERATING	–	Kg/Cm²
TEMP. (SENSOR)	DESIGN	–40 ~ 230	˚C
	OPERATING	–	˚C
TEMP. (ELECTRONICS)	DESIGN	–40 ~ 80	˚C
	OPERATING	–	˚C
SP.GR.		0.7 ~ 1.3	
ENCLOSURE		WEATHER PROOF	
FLANGE SIZE		ANSI 150# 4" RF	
DISPLACER SIZE		ø76.3x98L	
CONTACT RATING		250V AC 5A	

TAG NO.	L	L1	L2	L3	L4
					–
					–
					–
					–

NOTES

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
7	COOLING FIN	AL	3		
6	DISPLACER	316SS	4		
5	WIRE	316SS	1		
4	FLANGE	316SS	1	ANSI 150# 4" RF	
3	STEM	316SS	1		
2	HOUSING	ADC12	1		
1	HOUSING COVER	C.S	1		

BILL OF MATERIAL

REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED
△0	FOR APPROVAL	2021.06.14	K.I.CHOI	D.N.LEE	S.H.LEE

CUSTOMER: –

PROJECT: –

TITLE: DISPLACEMENT TYPE LEVEL SWITCH
SMC–11–C–2–OP–1–A
ASSEMBLY DRAWING

MANUFACTER: SeoJin Instech Co.,Ltd.

SCALE	ERP CODE	Work Order No.	REV.
N/S	–	–	△0

DWG NO. SJ–M013–DWG–AP046