


### 7> 3Point (Control and Alarm-SPDT) : Control and HH(LL)

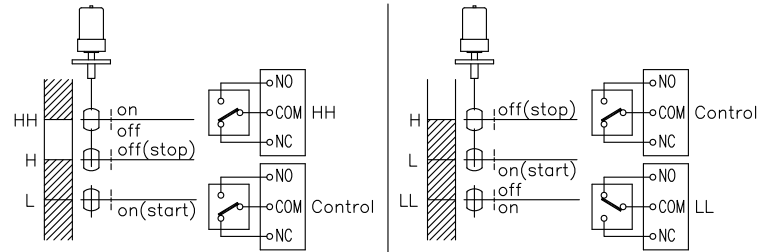

### DESIGN DATA

CODE	N/A				
UNIT	mm				
KIND OF FLUID	—				
PRESS.	DESIGN	Max. 10		Kg/Cm <sup>2</sup>	
	OPERATING	—		Kg/Cm <sup>2</sup>	
TEMP. (SENSOR)	DESIGN	-40 ~ 120		°C	
	OPERATING	—		°C	
TEMP. (ELECTRONICS)	DESIGN	-40 ~ 80		°C	
	OPERATING	—		°C	
SP.GR.		0.7 ~ 1.3			
ENCLOSURE		WEATHER PROOF			
FLANGE SIZE		ANSI 150# 4" RF			
DISPLACER SIZE		ø76.3x98L			
CONTACT RATING		250V AC 10A			
TAG NO.	L	L1	L2	L3	L4
					—
					—
					—
					—

### NOTES

6	DISPLACER	304SS	3		
5	CHAIN	304SS	1		
4	FLANGE	304SS	1	ANSI 150# 4" RF	
3	STEM	304SS	1		
2	HOUSING	ADC12	1		
1	HOUSING COVER	C.S	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

### BILL OF MATERIAL

CUSTOMER	-
----------	---

PROJECT	-
---------	---

TITLE	DISPLACEMENT TYPE LEVEL SWITCH SMC-7-A-1-OP-1-A ASSEMBLY DRAWING
-------	--

MANUFACTURER	<b>SeoJin Instech Co., Ltd.</b>
--------------	---------------------------------

SCALE	N/S	ERP CODE	-	Work Order No.	-	REV.	
DWG NO.	SJ-M013-DWG-AP037						

△					
△					
△					
△					
△	FOR APPROVAL	2021.06.14	K.I.CHOI	D.N.LEE	S.H.LEE
REV.	DESCRIPTION	DATE	DESIGNED	REVIEWED	APPROVED