

MV-XE21-22

2MP Network Outdoor Dome Camera




Features

- 1/2.8" 2MP Sony STARVIS CMOS sensor
- 2.8~12mm Motorized Zoom Lens
- 3D DNR(Digital Noise Reduction)
- D WDR (Digital Wide Dynamic Range)
- 22pcs IR LED(IR Distance 22~23m, MP-XE21-27 only)
- IP66 Aluminum Die-casting Waterproof structure
- Web Server built-in
- Triple Stream
- H.264, MJPEG
- ONVIF Compliance Ver 2.4
- PoE

Dimensions

Unit : mm

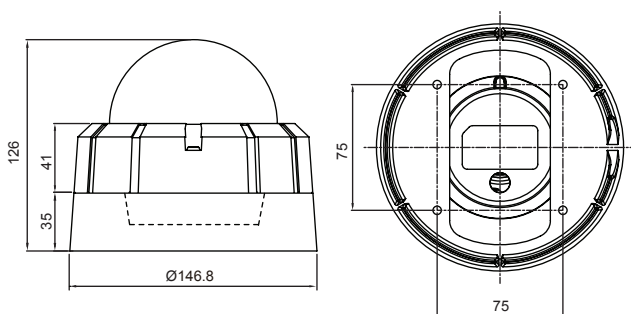

MODEL		MV-XE21-22		
CAMERA				
Image Sensor		Sony STARVIS 2.07Mega Pixels Image Sensor		
Size		1/2.8 inch		
Total Pixels		1945(H) x 1109(V) = 2.16 Mega Pixels		
Active Pixels		1945(H) x 1097(V) = 2.13 Mega Pixels		
Min. Illumination	Color	0.5 lux / DSS : 0.002 lux		
	BW	0.1lux / DSS : 0.001 lux		
	IR-LED	0 lux		
S/N Ratio		more than 50dB (AGC off)		
LENS				
Lens Type		2.8~12mm Motorized Zoom Lens		
Focal Length		f = 2.8mm ~ 12mm		
Aperture Ratio		F 1.4		
Angle Of View (D, H, V)	WIDE	127°	102°	54°
	TELE	37°	31°	18°
CAMERA FUNCTIONS				
Day & Night		Auto / Day(Color) / Night(BW), ICR Control		
Privacy Area		On / Off (8 Programmable Zones)		
Motion Detection		48 Zone, Sensitivity 1 ~ 5 Step, On / Off		
LPR		Auto, 1/15 ~ 1/9000, On / Off		
WDR		DWDR(1 ~ 3 Step) On / Off		
DNR		2DNR, 3DNR		
Defog		detects foggy, On / Off		
SLDC		Simple_Lens Distortion Correction, On / Off		
HLC		On / Off		
Elec. Shutter		Auto(1/15~1/15000), Suppress Rolling, Manual		
Color adjust		Bright / Contrast / Saturation / Sharp / Hue		
White Balance		Auto / Push/ Indoor / Outdoor / Fluorescent / User		
OSD display		Text, Date, Time, Event, On / Off		
Image Mirror		Normal / mirror(H) / Flip(V) / Both(HV)/Rotate		
NETWORK				
OS		Embedded Linux		
Interface		RJ45 10/100 Base-T PoE		
Protocol		TCP/IP,UDP/IP,RTP,RTSP,RTCP,NTP, HTTP,DHCP,FTP,SMTP,DNS,DDNS		
Onvif		ver2.4.2		
DDNS		iplinker.net		
Simultaneous Access		Max. 10 user		
Compress Format		H.264/MJPEG		
Resolution		1920x1080/1280x1024/1280x960/1280x720 /1024x768/640x480/320x240		
Max. Frame Rate		30fps @all resolution		
Video Quality		H.264 : Bitrate Control MJPEG : Quality Level Control		
Streaming		Triple Stream (Stream1,2,3) RTP/RTSP, UnicastRTP, Multicast RTP		
OS		Windows XP, 7, 8, 10,		
Manager		IE 11, Firefox, Safari, Opera		
Viewer		IE only (Active-X)		
GENERAL				
Power Source		DC12V±10%		
Power Consumption		Max 400mA		
Operating Temperature		-10°C ~ +50°C / 0% ~ 90% RH		
Dimensions		146.8(Ø) x 126(H) mm		
Weight		0.79Kg		