

PLUGS

series
BP

Protection	Gas	Zone	1-2	II2G	Ex d IIC T6 Gb
	Dusts		21-22	II2D	Ex tb IIIC T80°C Db

Degree of Protection	IP66
----------------------	------

Amb. Temp.	Standard	-20°C	+40°C
	Extended	-20°C	+60°C





Entries Threading	EN 10226 (Gk)
-------------------	---------------

Material	Aluminum light alloy
----------	----------------------

Painting	External epoxy RAL 9006
----------	-------------------------

Standards and Certificates	Directive 2014/34/EU (ATEX)
	EN 60079-0 • EN 60079-1 EN 60079-31
	CE CEC 13 ATEX 141

• Plug for socket series FSQ with interlocked switch.

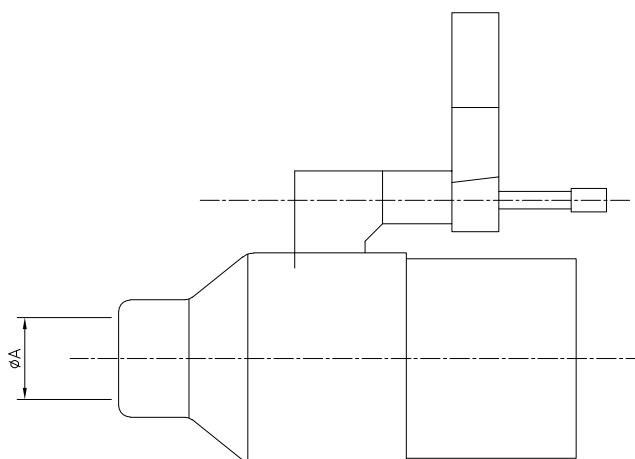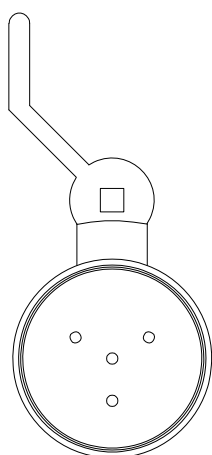

Code	Poles No.	Current (A)	Voltage (V)	ØA
BP 215	2 + E	25 A	500	3/4"
BP 325	3 + E	32 A	500	3/4"
BP 425	4 + E	32 A	500	3/4"
BP 360	3 + E	63 A	500	1"
BP 460	4 + E	63 A	500	1"

NOTES

- To read the installation and maintenance instructions is recommended.
- The degree of protection IP66 is guaranteed only when the plug is supplied with the relevant specific gasket. Maximum ambient temperature with EPDM O-ring is +40°C, whereas with Silicone O-ring is +60°C.