

MV-H26A-22

2MP Network Outdoor Dome Camera




Features

- 1/2.8" 2MP Sony STARVIS CMOS sensor
- 2.8~12mm Motorized Zoom Lens
- 22pcs IR LED
- DNR(Digital Noise Reduction)
- WDR (Wide Dynamic Range)
- IP66, IK10
- Web Server built-in
- Triple Stream
- H.265, H.264, MJPEG
- ONVIF Compliance Ver 2.4
- PoE

Dimensions

Unit : mm

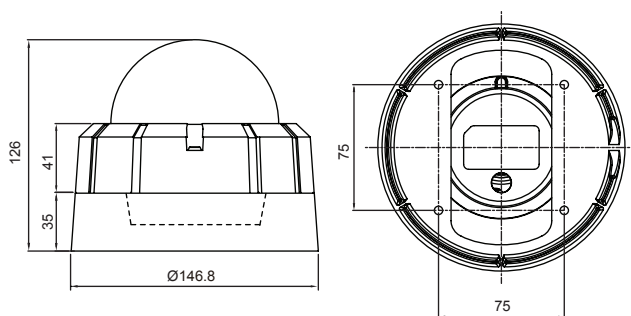

MODEL		MV-H26A-22		
CAMERA				
Image Sensor		1/2.8" Sony Starvis CMOS sensor		
Total Pixels		1945(H) x 1109(V) = 2.16M Pixels		
Active Pixels		1937(H) x 1097(V) = 2.12M Pixels		
Min. Illumination	Color	0.01lux / DSS 0.001lux		
	BW	0.001lux / DSS 0.0001lux		
	IR-LED	0 lux		
S/N Ratio		more than 50dB (AGC off)		
LENS				
Lens Type		2.8~12mm Motorized Zoom Lens		
Focal Length		f = 2.8mm ~ 12mm		
Aperture Ratio		F 1.4		
Angle Of View (D, H, V)	WIDE	134°	108°	57°
	TELE	39°	33°	19°
CAMERA FUNCTIONS				
Day & Night		Auto / Day(Color) / Night(BW), ICR Control		
Privacy Area		On / Off (16 Programmable Zones)		
Motion Detection		432 Zone, Sensitivity 1 ~ 5 Step, On/Off		
Real WDR		WDR, On/Off		
DNR		2DNR, 3DNR		
Defog		detects foggy, On / Off		
Elec. Shutter		Auto(1/30~1/30000), Suppress Rolling, Manual		
Color adjust		Bright / Contrast / Saturation / Sharp / Hue		
White Balance		Auto(indoor) / Auto(Outdoor) / Push/ User		
OSD display		Text, Date, Time, Event, On / Off		
Image Mirror		Normal / mirror(H) / Flip(V) / Both(HV)		
NETWORK				
OS		Embedded Linux		
Interface		RJ45 10/100 Base-T PoE		
Protocol		TCP/IP,UDP/IP,RTSP,RTSP,RTCP,NTP,		
		HTTP,DHCP,FTP,SMTP,DNS		
Onvif		ver17.06.05		
Simultaneous Access		Max. 10 user		
Compress Format		H.265/H.264/MJPEG		
Resolution		1920x1080/1280x1024/1280x960/1280x720		
		/1024x768/640x480/320x240		
Max. Frame Rate		30fps @all resolution		
Video Quality		H.265, H.264 : Bitrate Control		
		MJPEG : Quality Level Control		
Streaming		Triple Stream (Stream1,2,3)		
		RTP/RTSP, UnicastRTP, Multicast RTP		
OS		Windows 7, 8, 10,		
Manager		IE 11, Firefox, Safari, Opera		
Viewer		IE only (Active-X)		
GENERAL				
Power Source		DC12V±10%, PoE IEEE802.3af,Class3		
Power Consumption		MAX 560mA/6.72W		
Operating Temperature		-10°C ~ +50°C / 0% ~ 90% RH		
Dimensions		146.8(Ø) x 126(H) mm		
Weight		1.00Kg		