





Electric pedestrian pallet truck with picking lift

EJE C20

Lift height: 540 mm / Load capacity: 2000 kg

EJE C20

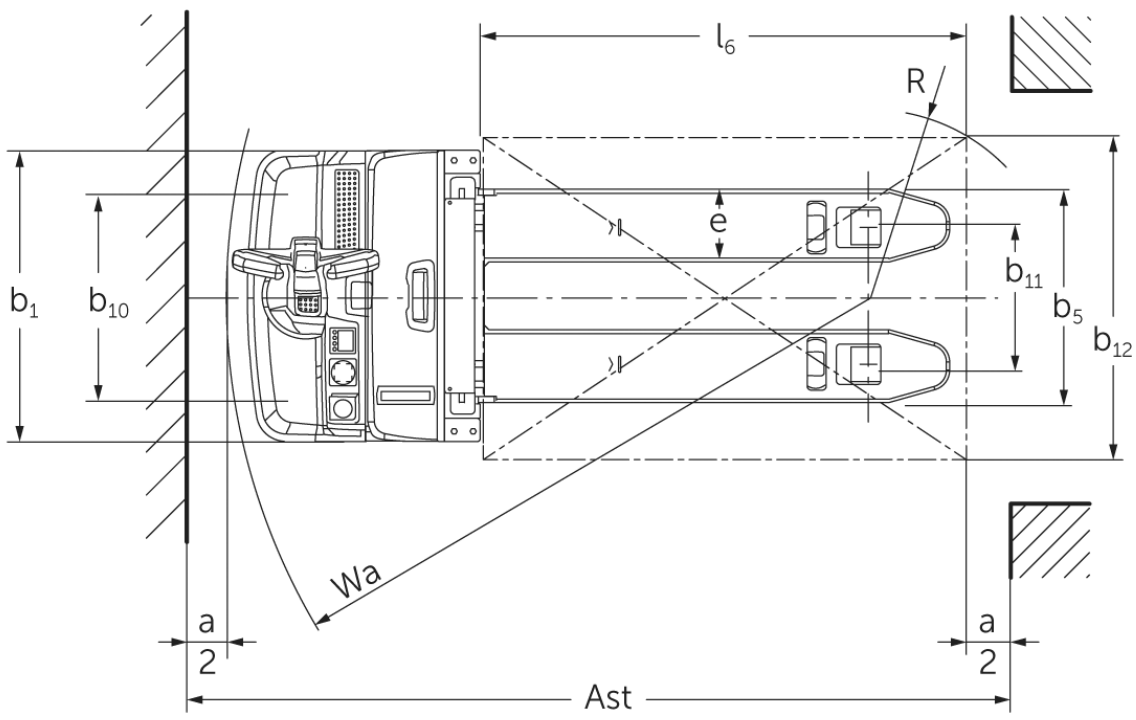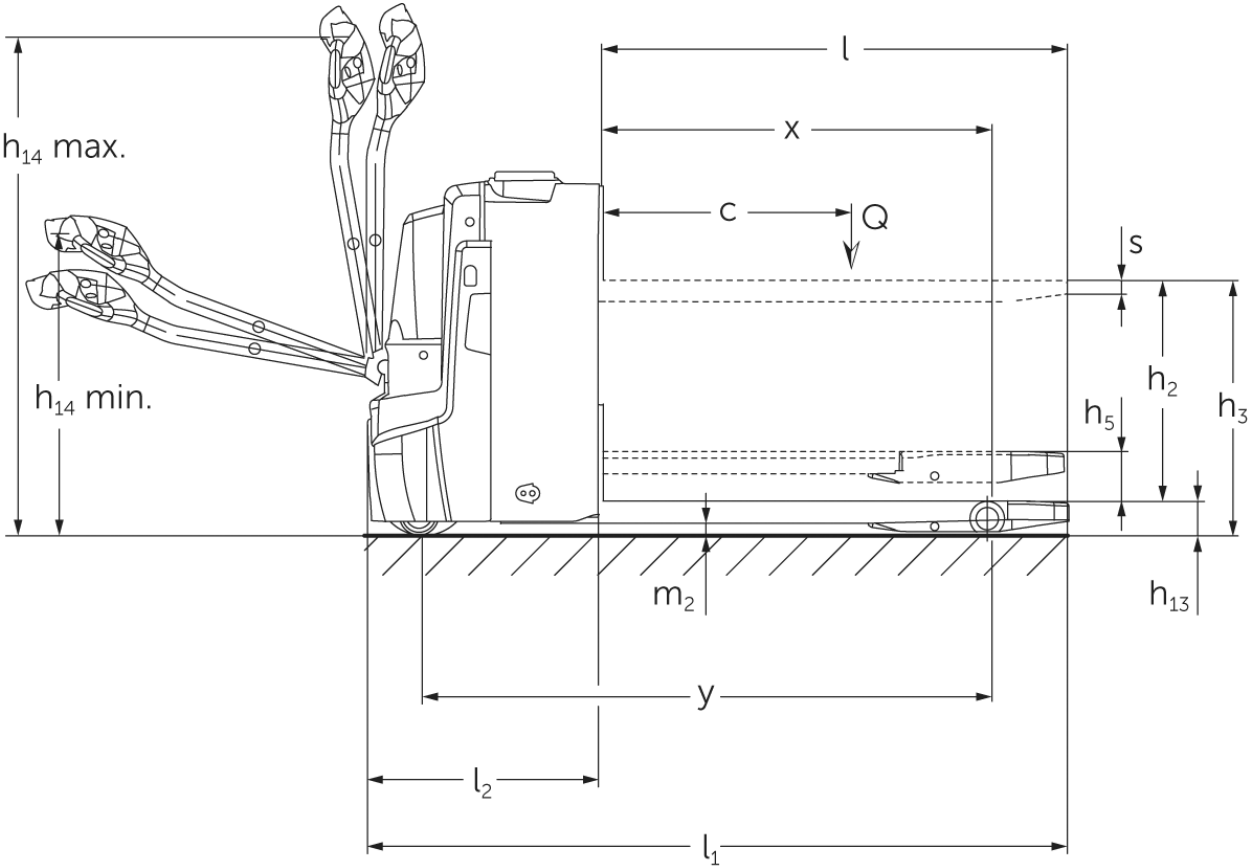

VDI table

Stand-on: 12/2022

Kennzeichen	1.1	Manufacturer (abbreviated description)		Jungheinrich
	1.2	Manufacturer's type designation		EJE C20
	1.3	Drive		Electric
	1.4	Operation		Pedestrian
	1.5	Load capacity/load	Q kg	2000
	1.5.1	Rated capacity/load with mast lift	Q kg	700
	1.5.2	Rated capacity/load with support arm lift	Q kg	2000
	1.6	Load centre distance	c mm	600
	1.8	Load distance, centre of drive axle to fork	x mm	893
	1.9	Wheelbase	y mm	1333
Gewichte	2.1.1	Service weight (incl. battery)	kg	523
	2.2	Axle load laden front/rear	kg	800 / 1729
	2.3	Axle load unladen front/rear	kg	390 / 133
Räder/Fahrwerk	3.1	Tyres		Polyurethane (PU)
	3.2	Tyre size, front		Ø 230 x 70
	3.3	Tyre size, rear		Ø 85 x 95
	3.4	Additional wheels		Ø 100 x 40
	3.5	Wheels, number front/back (x=driven)		1x +2/2 oder 4
	3.6	Tread width, front	b ₁₀ mm	510
	3.7	Tread width, rear	b ₁₁ mm	338
Grundabmessungen	4.3	Free lift (h2)	h ₂ mm	540
	4.4	Lift (h3)	h ₃ mm	752
	4.6	Initial lift	h ₅ mm	122
	4.9	Height of tiller handle in drive position min./max.	mm	750 / 1237
	4.15	Height, lowered	h ₁₃ mm	90
	4.19	Overall length	l ₁ mm	1734
	4.20	Length including fork shank	l ₂ mm	584
	4.21.1	Overall width	b ₁ mm	720
	4.22	Fork dimensions	s/e/l mm	60 x 180 x 1150
	4.25	Width across forks	b ₅ mm	530
	4.32	Ground clearance centre of wheelbase	m ₂ mm	30
	4.34.1	Aisle width (pallet 1000x1200 sideways)	Ast mm	2322
	4.34.2	Aisle width (pallet 800x1200 length)	Ast mm	2217
	4.35	Turning radius	W _a mm	1513
Leistungsdaten	5.1	Travel speed laden/unladen	km/h	6 / 6
	5.2	Lift speed laden/unladen	m/s	0.14 / 0.2
	5.3	Lowering speed laden/unladen	m/s	0.14 / 0.2
	5.8	Max. gradeability laden/unladen	%	8 / 20
	5.10	Service brake		generative
E-Motor/Elektronik	6.1	Drive motor, performance S2 60 min	kW	1.1
	6.2	Lift motor, performance with S3	kW	1.2
	6.4	Battery voltage/nominal capacity	V / Ah	24 / 150
	6.5	Battery weight	kg	151
	6.6.1	Energy consumption according to EN cycle	kWh/h	0.31
	6.6.2	CO2 equivalent as per EN 16796	kg/h	0.2
	6.7	Throughput	t/h	100
	6.8.1	Energy consumption with max. throughput	kWh/h	0.63

Sonstiges	8.1	Type of drive control		AC
	10.7	Sound level as per EN12053, operator's ear	dB (A)	61
- This data sheet according to VDI guideline 2198 only states the technical values of the standard truck. Different tyres, other masts, additional equipment etc. may result in different values.				

The German production facilities in
Norderstedt, Moosburg and Landsberg
are certified.

ISO 9001
ISO 14001

Jungheinrich fork lift trucks meet
European safety requirements.



 **JUNGHEINRICH**