


Standard Current Transformer




- 옥내용 (For Indoor)
- 단상 (Single Phase)
- 표준용 (For standard)

Dimension & Drawing

CTS-1, 3, 4

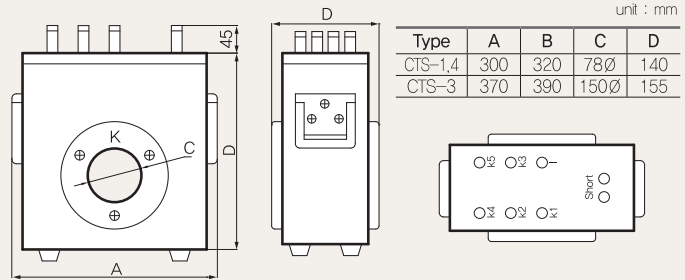

CTS-2

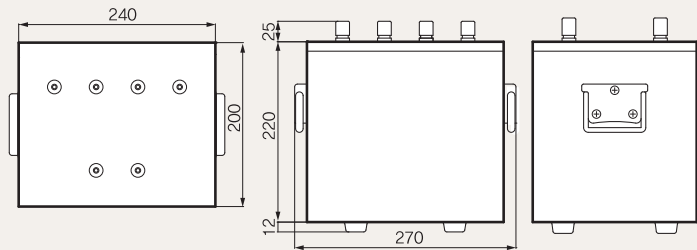

Specification

Standard	KS C 1706			
Type	CTS - 1	CTS - 2	CTS - 3	CTS - 4
Max. Voltage		1.15 kV		7.2kV
Primary Current	5 ~ 2000 A	0.5 ~ 100 A	1000 ~ 5000 A	5 ~ 1500 A
Secondary Current	5 or 1 A			
Rated Burden	15 VA			
Insulation Level	1.15 / 4 / - kV			7.2 / 16 / 45 kV (6B)
Accuracy Class	0.2			
Frequency	60 Hz (Others on request)			
Weight	≒ 15 kg	≒ 20 kg	≒ 15 kg	≒ 14 kg

※ 상기의 정격 1차, 2차 전류는 표준형이며, 그 외의 전류비 제품도 생산 가능합니다.

Above rated primary and secondary current is standard type, and besides, can be manufacture the another current ratio products.

※ 상기의 Accuracy Class는 표준형이며, 0.1Class는 주문 사양에 의해 생산 가능합니다.

The above Accuracy class is standard type, and 0.1 Class can be manufacture by specification ordering.

Standard Current Ratio

Type	CTS - 1	CTS - 2	CTS - 3	CTS - 4
Primary Current (A)	2000, 1500, 1200, 750, 600, 500, 400, 300, 250, 200, 150 (Through out Type) 100, 75, 50, 40, 30, 20, 15, 10, 5 (Binding Post Type)	100, 75, 50, 25, 15, 10, 5, 2.5, 1, 0.5 (Binding Post Type) or 120, 75, 60, 40, 30, 24, 15, 12, 6, 3 (Binding Post Type)	5000, 4000, 3000, 2000, 1000 (Through out Type)	1500, 750, 500, 300, 250 (Through out Type) 150, 100, 50 30, 15, 10, 5 (Binding Post Type)
Secondary Current (A)	5 or 1			