


# COMPONENT ARRANGEMENT

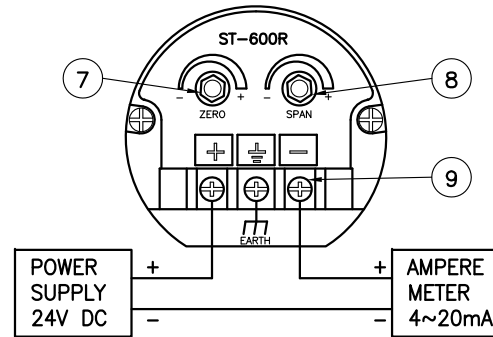

## DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	Max. 10	Kg/Cm <sup>2</sup>
	OPERATING	—	Kg/Cm <sup>2</sup>
TEMP. (SENSOR)	DESIGN	—	°C
	OPERATING	—	°C
TEMP. (ELECTRONICS)	DESIGN	—	°C
	OPERATING	—	°C
SP.GR.	MORE THAN 0.85		
VISCOSITY	10 P / 1 Pa.s		
ENCLOSURE	WEATHER PROOF		
FLANGE SIZE	JIS 10K 80A FF 6.0t		
FLOAT TYPE	ø79x90L (STD.)		
CALIBRATION	ZERO AND SPAN		
POWER SUPPLY	15~32V DC		
OUTPUT SIGNAL	4~20mA		

## NOTES

- ( ) Dimensions are reference dimensions.

## REVISION

9	TERMINALS		1		ST-600R
8	SPAN DIAL		1		ST-600R
7	ZERO DIAL		1		ST-600R
6	STEM	304SS	1	or 316SS	
5	FLOAT	304SS	1	or 316SS	
4	FLOAT STOPPER	304SS	2	or 316SS	
3	FLANGE	304SS	1	or 316SS	
2	HOUSING	ADC12	1		
1	COVER	ADC12	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

## BILL OF MATERIAL

CUSTOMER	—
PROJECT	—
TITLE	FLOAT TYPE LEVEL TRANSMITTER ST-600-A(B)-1-A-1-A-2-A ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

SCALE	N/S	DWG NO.	DWG CODE	0000	Work Order No.	—	REV.	△
-------	-----	---------	----------	------	----------------	---	------	---

△									
△									
△									
△									
△									
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED			