


COMPONENT ARRANGEMENT

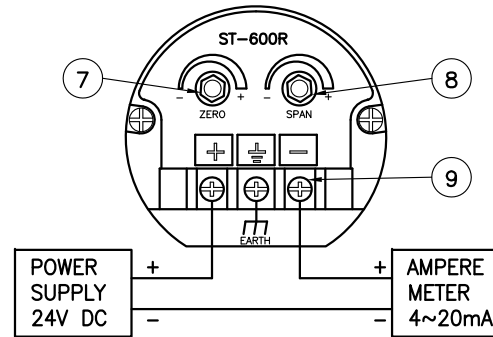

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	-		
PRESS.	DESIGN	Max. 5	Kg/Cm ²
	OPERATING	-	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	-	°C
	OPERATING	-	°C
TEMP. (ELECTRONICS)	DESIGN	-	°C
	OPERATING	-	°C
SP.GR.	MORE THAN 0.6		
VISCOSITY	10 P / 1 Pa.s		
ENCLOSURE	WEATHER PROOF		
FLANGE SIZE	JIS 10K 80A FF 6.0t		
FLOAT TYPE	ø102x121L		
CALIBRATION	ZERO AND SPAN		
POWER SUPPLY	15~32V DC		
OUTPUT SIGNAL	4~20mA		

NOTES

1. () Dimensions are reference dimensions.

REVISION

9	TERMINALS		1		
8	SPAN DIAL		1		
7	ZERO DIAL		1		
6	STEM	304SS	1	or 316SS	
5	FLOAT	304SS	1	or 316SS	
4	FLOAT STOPPER	304SS	2	or 316SS	
3	FLANGE	304SS	1	or 316SS	
2	HOUSING	ADC12	1		
1	COVER	ADC12	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

BILL OF MATERIAL

CUSTOMER	-
PROJECT	-
TITLE	FLOAT TYPE LEVEL TRANSMITTER ST-600-A(B)-1-A-1-B-2-A ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

SCALE		DWG CODE	0000	Work Order No.	-	REV.	
N/S		DWG NO.					

△							
△							
△							
△							
△	FOR APPROVAL						
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED	