


### COMPONENT ARRANGEMENT

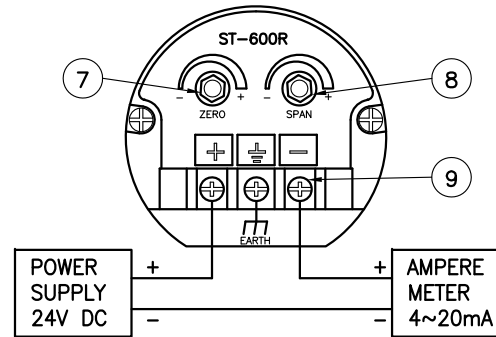

### DESIGN DATA

CODE	N/A				
UNIT	mm				
KIND OF FLUID	—				
PRESS.	DESIGN	Max. 5		Kg/Cm <sup>2</sup>	
	OPERATING	—		Kg/Cm <sup>2</sup>	
TEMP. (SENSOR)	DESIGN	—		°C	
	OPERATING	—		°C	
TEMP. (ELECTRONICS)	DESIGN	—		°C	
	OPERATING	—		°C	
SP.GR.	MORE THAN 0.6				
VISCOSITY	10 P / 1 Pa.s				
ENCLOSURE	EXPLOSION	Ex d IIC T6,IP65			
FLANGE SIZE					
FLOAT TYPE	ø102x121L				
CALIBRATION	ZERO AND SPAN				
POWER SUPPLY	15~32V DC				
OUTPUT SIGNAL	4~20mA				
TAG NO.	L	L1	L2	L3	

### NOTES

1. ( ) Dimensions are reference dimensions.

### REVISION

9	TERMINALS		1		
8	SPAN DIAL		1		
7	ZERO DIAL		1		
6	STEM	304SS	1	or 316SS	
5	FLOAT	304SS	1	or 316SS	
4	FLOAT STOPPER	304SS	2	or 316SS	
3	FLANGE	304SS	1	or 316SS	
2	HOUSING	ADC12	1		
1	COVER	ADC12	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

### BILL OF MATERIAL

CUSTOMER	—				
PROJECT	—				
TITLE	FLOAT TYPE LEVEL TRANSMITTER ST-600-A(B)-1-A-1-B-3-A ASSEMBLY DRAWING				
MANUFACTURER	SeoJin Instech Co., Ltd.				

SCALE	1:1	DWG CODE	0000	Work Order No.	—	REV.	△
N/S		DWG NO.					

△							
△							
△							
△							
△	FOR APPROVAL						
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED	