



SDS-600-100R-75

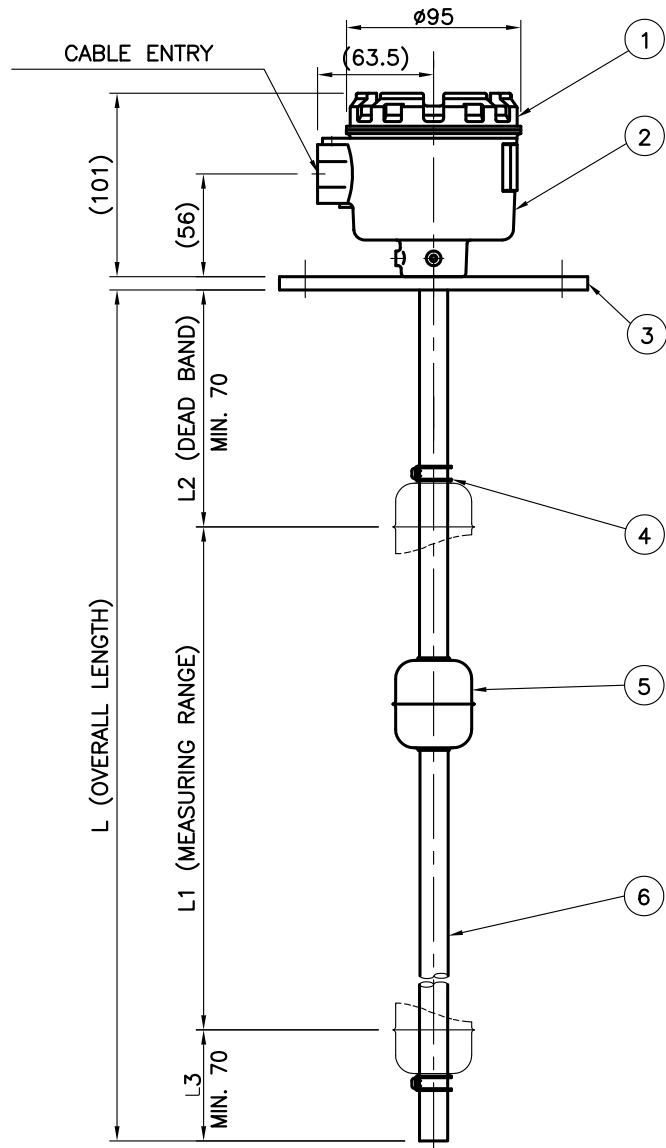

COMPONENT ARRANGEMENT

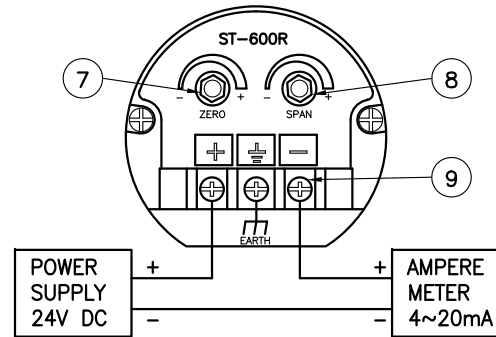

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	Max. 5	Kg/Cm ²
	OPERATING	—	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	—	°C
	OPERATING	—	°C
TEMP. (ELECTRONICS)	DESIGN	−20 ~ 60	°C
	OPERATING	—	°C
SP.GR.	MORE THAN 0.98		
VISCOSITY	10 P / 1 Pa.s		
ENCLOSURE	EXPLOSION	Ex d IIC T6,IP65	
FLANGE SIZE	—		
FLOAT TYPE	ø52x60L		
CALIBRATION	ZERO AND SPAN		
POWER SUPPLY	15~32V DC		
OUTPUT SIGNAL	4~20mA		

NOTES

1. () Dimensions are reference dimensions.

REVISION

9	TERMINALS		1		ST-600R
8	SPAN DIAL		1		ST-600R
7	ZERO DIAL		1		ST-600R
6	STEM	316SS/316LSS	1		
5	FLOAT	316SS/316LSS	1		
4	FLOAT STOPPER	316SS/316LSS	2		
3	FLANGE	316SS/316LSS	1		
2	HOUSING	ADC12	1		
1	COVER	ADC12	1		

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

BILL OF MATERIAL

CUSTOMER	-				
PROJECT	-				
TITLE	FLOAT TYPE LEVEL TRANSMITTER ST-600-B-1-A-1-D-3-A ASSEMBLY DRAWING				
MANUFACTURER	SeoJin Instech Co., Ltd.				

SCALE	1:1	DRW CODE	0000	Work Order No.	-	REV.	
N/S		DRW NO.					

△							
△							
△							
△							
△							
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED	