


COMPONENT ARRANGEMENT

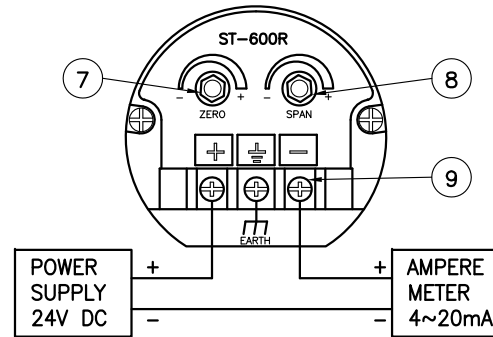

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	Max. 0.5	Kg/Cm ²
	OPERATING	—	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	—	°C
	OPERATING	—	°C
TEMP. (ELECTRONICS)	DESIGN	−20 ~ 60	°C
	OPERATING	—	°C
SP.GR.	MORE THAN 1.0		
VISCOSITY	10 P / 1 Pa.s		
ENCLOSURE	WEATHER PROOF		
FLANGE SIZE	JIS 10K 80A FF		
FLOAT TYPE	ø80x97L		
CALIBRATION	ZERO AND SPAN		
POWER SUPPLY	15~32V DC		
OUTPUT SIGNAL	4~20mA		

TAG NO.	L	L1	L2	L3

NOTES

1. () Dimensions are reference dimensions.

REVISION

9	TERMINALS	1	ST-600R
8	SPAN DIAL	1	ST-600R
7	ZERO DIAL	1	ST-600R
6	STEM	304SS+PTFE	1
5	FLOAT	PTFE	1
4	FLOAT STOPPER	PTFE	2
3	FLANGE	304SS+PTFE	1
2	HOUSING	ADC12	1
1	COVER	ADC12	1

NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK
----	-------------	----------	------	---------------	--------

BILL OF MATERIAL

CUSTOMER	—
PROJECT	—
TITLE	FLOAT TYPE LEVEL TRANSMITTER ST-600-D-1-A-1-B-1 ASSEMBLY DRAWING
MANUFACTURER	SeoJin Instech Co., Ltd.

SCALE	N/S	DWG NO.	DWG CODE	0000	Work Order No.	—	REV.	△
-------	-----	---------	----------	------	----------------	---	------	---

△							
△							
△							
△							
△							
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED	