




DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID		—	
PRESS.	DESIGN	Max. 10	Kg/Cm ²
	OPERATING	—	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	−10 ~ 90	°C
	OPERATING	—	°C
CABLE STRENGTH		Max. 2	Kg/Cm ²
LEAD WIRE LENGTH		300 mm	
SP.GR.		0.8	
ENCLOSURE		N/A	
MOUNTING SIZE ("A")		<input type="checkbox"/> PF 1/4"	<input type="checkbox"/> PF 1/8"
FLOAT SIZE		ø25x25L	
MAX. OPER. VOLTAGE		AC300V, DC300V	
MAX. OPER. CURRENT		AC0.5A, DC0.5A	
MAX. CONTACT CAPACITY		AC50VA, DC50W	


NOTES

5	STOPPER	P.P	1		
4	FLOAT	N.B.R	1		
3	BODY	P.P	1		
2	MOUNTING NUT	P.P	1		
1	LEAD WIRE	—	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	—			
PROJECT	—			
TITLE	MINI FLOAT TYPE LEVEL SWITCH SOL-2A ASSEMBLY DRAWING			
MANUFACTURER	 SeoJin Instech Co., Ltd.			
SCALE		ERP CODE	—	Work Order No. —
N/S	DWG NO.	SJ-M002-DWG-AP002		REV. 

Heat-Proof type P.V.C

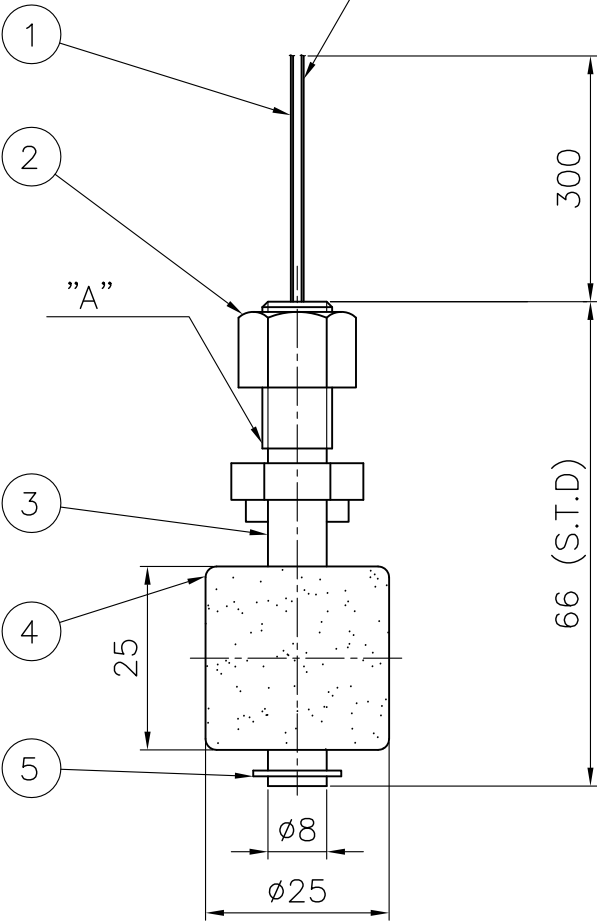

△						
△						
△						
△						
△						
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED