


1004V-DWG-L10R-PS

Heat-proof type P.V.C



△						
△						
△						
△						
△						
REV.	DESCRIPTION	DATE	DESIGNED	CHECKED	REVIEWED	APPROVED

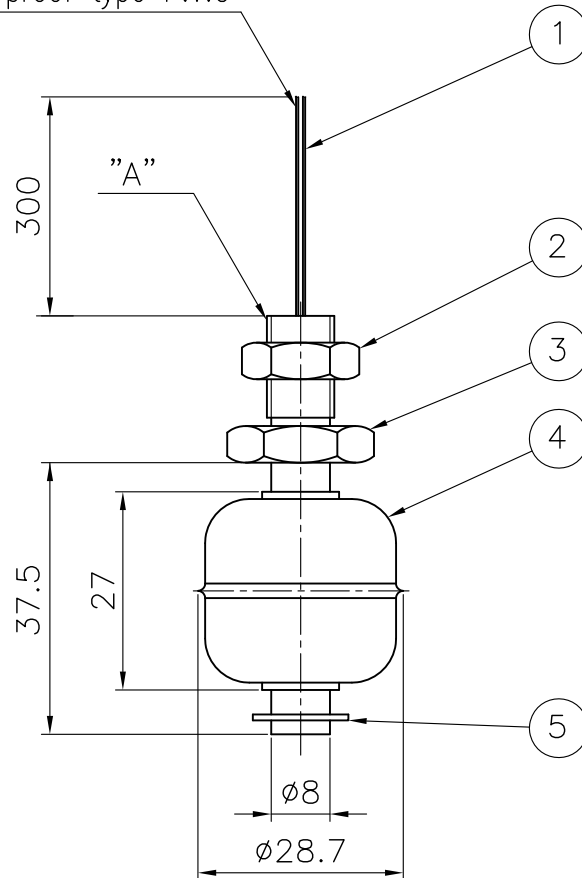

DESIGN DATA

CODE	N/A		
UNIT	mm		
KIND OF FLUID	—		
PRESS.	DESIGN	Max. 10	Kg/Cm ²
	OPERATING	—	Kg/Cm ²
TEMP. (SENSOR)	DESIGN	−10 ~ 100	°C
	OPERATING	—	°C
CABLE STRENGTH	Max. 2		Kg/Cm ²
LEAD WIRE LENGTH	300 mm		
SP.GR.	0.8		
ENCLOSURE	N/A		
MOUNTING SIZE ("A")	<input type="checkbox"/> PF 1/4"	<input type="checkbox"/> PF 1/8"	
FLOAT SIZE	ø28.7x27L		
MAX. OPER. VOLTAGE	AC300V, DC300V		
MAX. OPER. CURRENT	AC0.5A, DC0.5A		
MAX. CONTACT CAPACITY	AC50VA, DC50W		

NOTES

5	STOPPER	304SS	1		
4	FLOAT	304SS	1		
3	BODY	304SS	1		
2	MOUNTING NUT	304SS	1		
1	LEAD WIRE	—	1		
NO	DESCRIPTION	MATERIAL	Q'TY	SPECIFICATION	REMARK

BILL OF MATERIAL

CUSTOMER	—				
PROJECT	—				
TITLE	MINI FLOAT TYPE LEVEL SWITCH SOL-5 ASSEMBLY DRAWING				
MANUFACTURER	 SeoJin Instech Co., Ltd.				
SCALE		ERP CODE	—	Work Order No.	—
N/S	DWG NO.	SJ-M002-DWG-AP001			