



CAROUSEL LEAK TESTER

FOR TIGHT HEAD DRUMS OR OPEN TOP PAILS
FROM 3L TO 8L





WITH 16 TESTING HEADS

SPEED 60 TO 80CPM

AUTOMATIC CAN HEIGHT ADJUSTMENT

AUTOMATIC LEAKING CAN EJECTION


PRESSURED AIR TEST PRINCIPLE

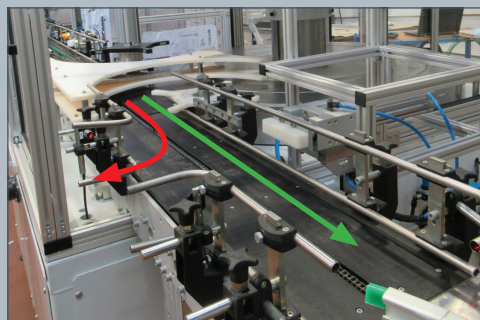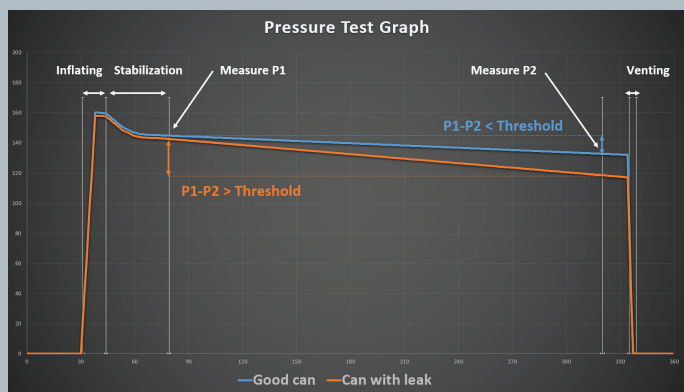

- Located at the end of the machine, a pneumatic ejector allows to reject automatically the faulty cans

FEATURES:

- Testing head driven downward by mechanical cam
- Leak detection thanks to very sensitive pressure difference transducer
- Compressed air buffer tank to prevent air supply pressure variation

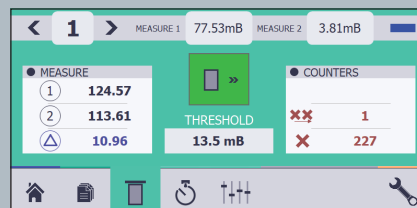


- User-friendly touchscreen panel
Reject point adjustable from the control panel
Settings are recorded in recipes
Tests results can be saved to a USB drive **USB**
- Remote access via OPC-UA for distant troubleshooting

TECHNICAL SPECIFICATIONS

Cans diameter:	150 to 200 mm*
Cans height:	110 to 300 mm*
Speed:	60 to 80 CPM
Sensitivity:	leak as small as a $\varnothing 0.3$ mm hole**

*Contact us for more customization

**smallest detectable leak measured at 60 CPM on a 8 liters can

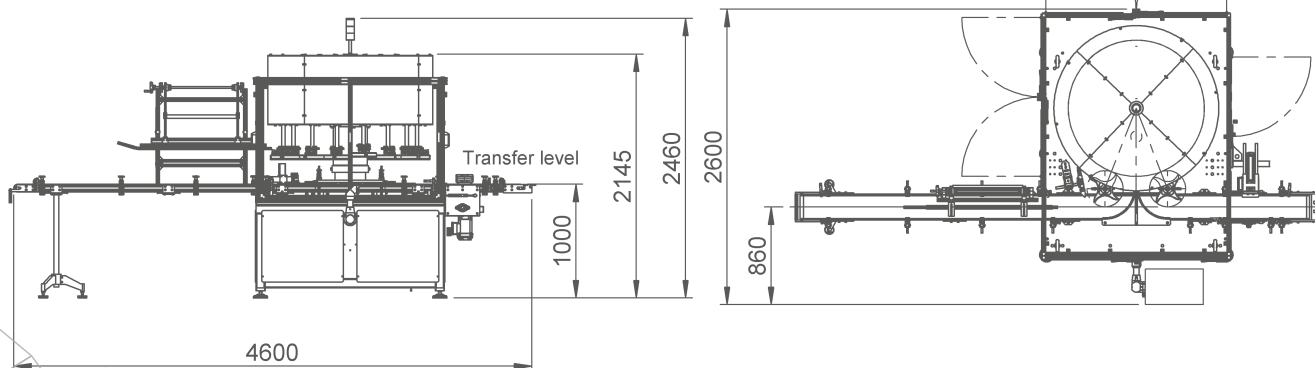

Sabatier SAS N° 31 Avenue de Rome F-13127 Vitrolles
Phone +33 442 46 94 00
E-Mail info@sabatier.fr www.sabatier.fr

Sabatier
SQUADRONIC GROUP

Technology that keeps you ahead