



Three Phase Voltage Transformer (1.15kV)

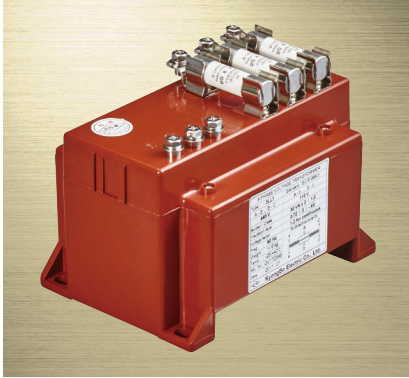

- 옥내용
For Indoor
- 3상 비접지형
Three Phase,
Line to Line Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Molding.

Dimension & Drawing

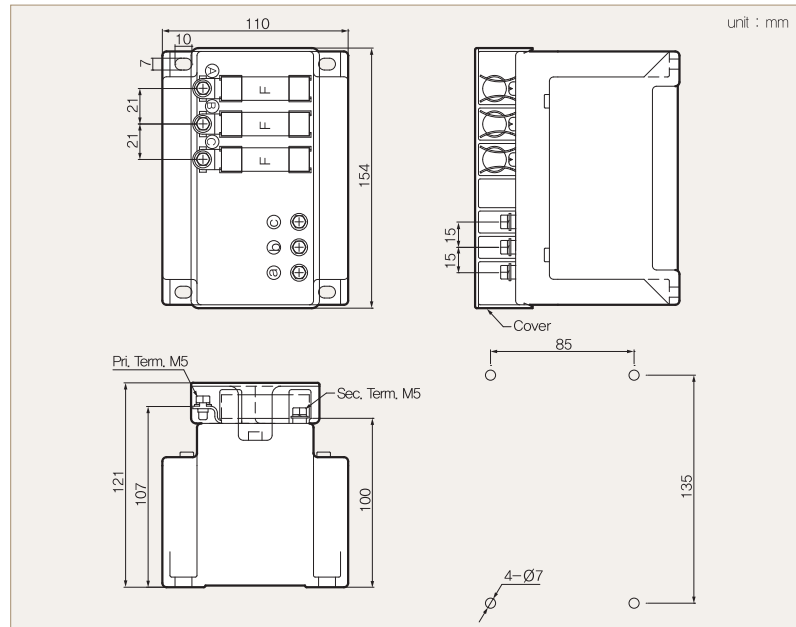

Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3	
Type	3 LL 1			
Max. Voltage	0,23 ~ 1,15 kV	0,23 ~ 1,15 kV	0,72kV	
Primary Voltage	110 ~ 480 V			
Secondary Voltage	110 V			
Insulation Level	2 ~ 4 kV	2 ~ 4 kV	0,72kV / 3 / – kV	
Accuracy Class	1,0	1P or 3P	1,0 or 3,0	0,5
Over Voltage Factor	1,1Vn Continuous		1,2Vn Continuous	
Rated Burden	30 VA × 2			15 VA × 2
Frequency	60 Hz (Others on request)			
Weight	≒ 6,0 kg			

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ VT Fuse는 별매품입니다. If user wants to change the fuse, can be make an extra cost.

1' ry / 2' ry Voltage : 생산 전압비 (Option)

1차 전압 (V)	2차 전압 (V)
110, 220, 380, 440, 460, 480	110, 120, 220

Connection Diagram

