


6-6

조광형 누름버튼 스위치 ILLUMINATED PUSH BUTTON SWITCH

형식 구분도 | Type classification diagram |

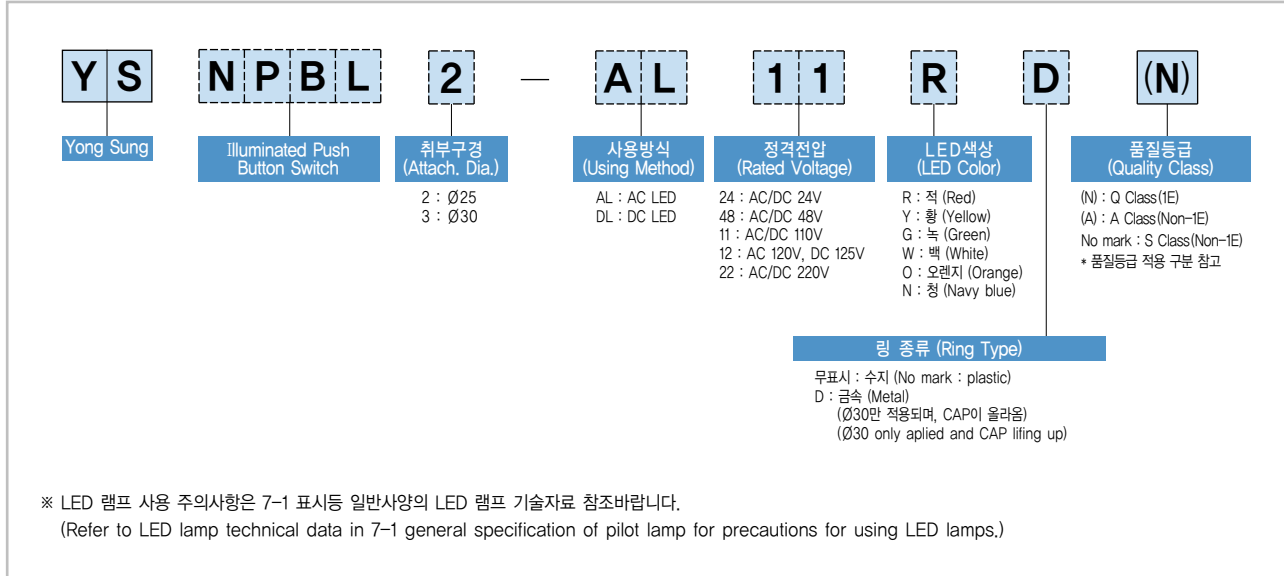


램프 정격 | Lamp rating |

정격 전압 (Rated voltage)	AC/DC 24V	AC/DC 48V	AC/DC 110V	AC 120V DC 125V	AC/DC 220V
소비전력, 최대 (Power consumption, max.)	0.6VA/0.5W	1.8VA/1.5W	2VA/1.8W	2VA/1.8W	5VA/4.4W
허용전압 (Allowable voltage)	정격전압의 ±10% (±10% of rated voltage)				
절연저항 (Insulation resistance)	100MΩ 이상 (Above 100MΩ), DC 500V MEGGER				
내전압 (Withstand voltage)	AC 2,500V / 1 min (50 ~ 60Hz)				
주파수 (Frequency)	50 ~ 60Hz (AC only)				
적용 LED (Applied LED)	YSE1024				

램프 단자간 내전압 및 절연저항 시험은 허용하지 않습니다.

(Withstand voltage and insulation resistance tests between lamp terminals are not allowed.)


램프 단자 극성 | Lamp terminal polarity | DC




외형 치수도 | Shape dimension |

(Unit : mm)

NPBL2 (Ø25)

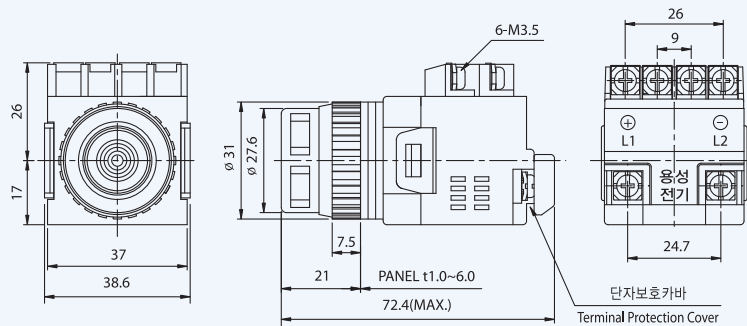

NPBL3 (Ø30)

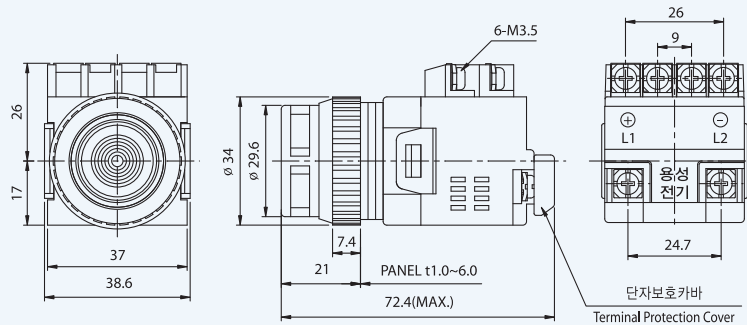

NPBL3 (Ø30) -D type ring

