


MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS

RN Non-Polarized, Wide Temperature Range Series


- Wide operating temperature range of -40 ~ +105°C
- Designed for use in circuits with reversing polarity
- Complied to the RoHS directive



Item	Characteristics									
Operating temperature range	-40 ~ +105℃									
Leakage current max.	I = 0.03CV or 3μA whichever is greater (after 5 minutes)									
Capacitance tolerance	±20% at 120Hz, 20℃									
Dissipation factor max. (at 120Hz, 20℃)	Capacitance > 1000μF : tanδ increases by 0.02 for each 1000μF from below value.									
	WV	6.3	10	16	25	35	50	63	80	100
	tanδ	0.24	0.20	0.16	0.16	0.14	0.12	0.12	0.12	0.12
Low temperature characteristics (Impedance ratio at 120Hz)	WV		6.3		10		16		25 ~ 100	
	Z-25℃/Z+20℃		4		3		2		2	
	Z-40℃/Z+20℃		8		6		4		3	
Load life (after application of the rated voltage for 1000 hours at 105℃)	Leakage current				Less than specified value					
	Capacitance change				Within ±20% of initial value					
	tanδ				Less than 200% of specified value					
	Test method				Polarity reverse each 250 hours					
Shelf life (at 105℃)	After 1000 hours no load test, leakage current, capacitance and tanδ are same as load life value. The measurement shall be performed at 20℃ by the KS C IEC 60384 - 4									

DRAWING

Unit : mm

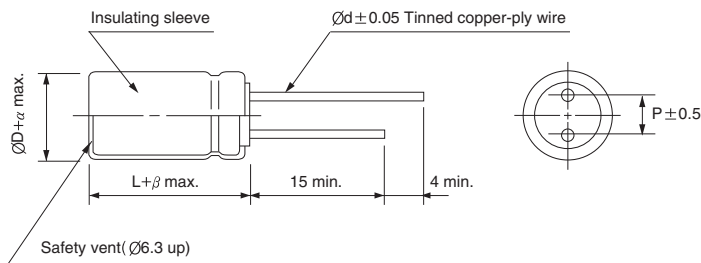

ØD	5	6.3	8	10	12.5	16	18	22
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10.0
Ød	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0
α	0.5							1.0
β	1.5			2.0			3.0	

FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

µF \ Frequency	50Hz	120Hz	1kHz	10kHz ≤
~ 47	0.75	1.00	1.55	2.00
68 ~ 680	0.80	1.00	1.34	1.50
1000 ~	0.85	1.00	1.13	1.15

RN series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF \ WV	6.3	10	16	25	35	50	63	80	100
1.0						5 × 11 11	5 × 11 12	5 × 11 12	5 × 11 13
1.5						5 × 11 14	5 × 11 15	5 × 11 15	5 × 11 16
2.2						5 × 11 17	5 × 11 18	5 × 11 18	5 × 11 19
3.3						5 × 11 21	5 × 11 23	6.3 × 11 26	6.3 × 11 27
4.7					5 × 11 23	5 × 11 25	6.3 × 11 31	6.3 × 11 31	8 × 11.5 39
6.8				5 × 11 26	5 × 11 27	6.3 × 11 34	6.3 × 11 37	8 × 11.5 44	10 × 12.5 54
10			5 × 11 31	5 × 11 31	6.3 × 11 38	6.3 × 11 41	8 × 11.5 53	10 × 12.5 62	10 × 12.5 65
15		5 × 11 34	5 × 11 38	6.3 × 11 44	8 × 11.5 55	8 × 11.5 60	10 × 12.5 76	10 × 12.5 76	10 × 16 88
22	5 × 11 38	5 × 11 41	6.3 × 11 53	8 × 11.5 63	8 × 11.5 67	10 × 12.5 84	10 × 16 101	10 × 16 101	
33	5 × 11 46	6.3 × 11 58	8 × 11.5 77	8 × 11.5 77	10 × 12.5 95	10 × 16 113	10 × 16 124	10 × 20 135	
47	6.3 × 11 63	6.3 × 11 69	8 × 11.5 92	10 × 12.5 106	10 × 16 125	10 × 20 147	10 × 20 161	12.5 × 20 189	
68	6.3 × 11 76	8 × 11.5 98	10 × 12.5 128	10 × 16 140	10 × 20 164	10 × 20 177	12.5 × 20 227	12.5 × 25 248	
100	8 × 11.5 109	10 × 12.5 139	10 × 16 170	10 × 20 185	10 × 20 198	12.5 × 20 251	12.5 × 25 300	16 × 25 333	
150	10 × 12.5 155	10 × 16 186	10 × 20 227	12.5 × 20 267	12.5 × 20 285	12.5 × 25 336	16 × 25 408	16 × 35.5 468	
220	10 × 12.5 188	10 × 20 246	12.5 × 20 323	12.5 × 20 323	12.5 × 25 376	16 × 25 451	16 × 35.5 567	18 × 35.5 609	
330	10 × 16 252	12.5 × 20 354	12.5 × 20 396	12.5 × 25 431	16 × 25 511	16 × 35.5 634	18 × 35.5 745	18 × 40 782	
470	10 × 20 328	12.5 × 20 422	12.5 × 25 515	16 × 25 571	16 × 35.5 701	18 × 35.5 812	18 × 40 933	22 × 41 1027	
680	12.5 × 20 464	12.5 × 25 554	16 × 25 687	16 × 35.5 788	18 × 35.5 904	18 × 40 1025	22 × 41 1236		
1000	12.5 × 25 613	16 × 25 745	16 × 35.5 956	18 × 35.5 1026	18 × 40 1151	22 × 41 1368			
1500	16 × 25 800	16 × 35.5 999	18 × 35.5 1184	18 × 40 1243	22 × 41 1451				
2200	16 × 35.5 1072	18 × 35.5 1242	18 × 40 1428	22 × 41 1572					
3300	18 × 35.5 1361	18 × 40 1534	22 × 41 1835	<div> <div>← Case size ØD × L (mm)</div> <div>← Ripple current (mA rms) at 105°C, 120Hz</div> </div>					
4700	18 × 40 1650	22 × 41 1942							
6800	22 × 41 2060								