



Three Phase Earthed Voltage Transformer (1.15kV)

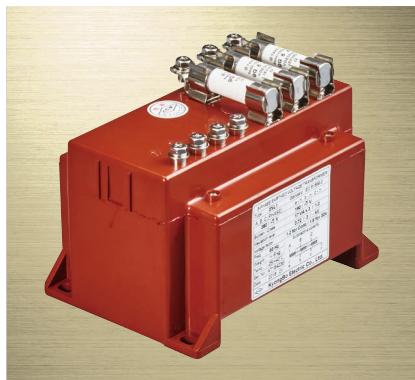

- 옥내용
For Indoor
- 3상 접지형
Three Phase,
Line to Earth Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Molding.

Dimension & Drawing

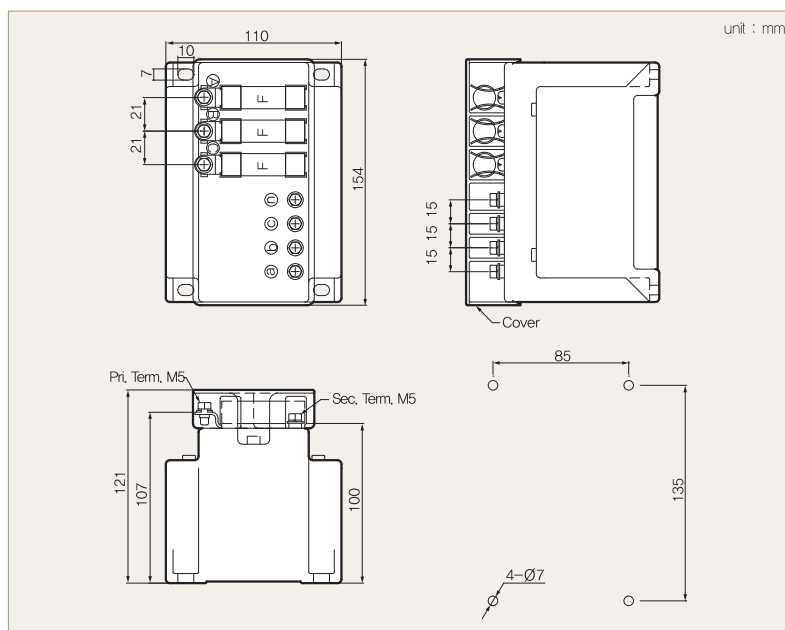

Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Type	3 NL 1		
Max. Voltage	0.23 ~ 1.15 kV	0.23 ~ 1.15 kV	0.72kV
Primary Voltage	110 / $\sqrt{3}$ ~ 480 / $\sqrt{3}$ V		
Secondary Voltage	190 / $\sqrt{3}$ V		
Insulation Level	2 ~ 4 kV	2 ~ 4 kV	0.72kV / 3 / - kV
Accuracy Class	1.0	1P	1.0
Rated Burden	17 VA × 3		
Over Voltage Factor	1.1Vn Continuous / 1.9Vn(30min)		1.2Vn Continuous / 1.9Vn(30s)
Frequency	60 Hz (Others on request)		
Weight	≒ 6.0 kg		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ VT Fuse는 별매품입니다. If user wants to change the fuse, can be make an extra cost.

Connection Diagram

