

ACS(L) Welded cylindrical accumulators



► Technical description

The ACS(L) type welded accumulators are made up of a shell in high resistance steel containing a fluid-gas separator called a bladder-diaphragm. This bladder-diaphragm is made of nitrile for the standard range, and of hydrogenated nitrile for low temperature applications. The bladder-diaphragm is fitted with an anti-extrusion stud, thus allowing rapid and total discharge of the accumulator.

► Advantages


- Low temperature versions suitable for operation at temperatures down to -40°C (only for ACS series)
- Completely modular from 0.7 to 4 litres. This design concept means easy addition of intermediate models if required
- The bladder-diaphragm offers exceptionally good resistance to fatigue
- Rapid and total discharge possible due to the anti-extrusion stud actually fitted onto the bladder-diaphragm.

► Operating fluids


- Mineral-based hydraulic fluids.
- Other fluids: please ask.

► Examples of applications

Energy storage

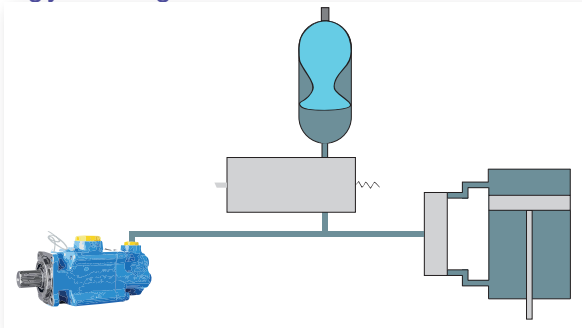

Suspension

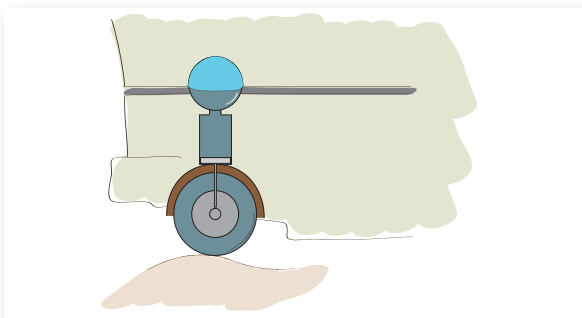

ACS 330 bar

Maximum pressure: 330 bar

Extreme operating temperatures :

- Standard version : -20°C to +100°C
- Low temperature version : -40°C to +100°C


ACSL 250 bar

Maximum pressure 250 bar.

Extreme operating temperatures :

- Standard version : -20°C to +100°C

► Deformation of the bladder-diaphragm

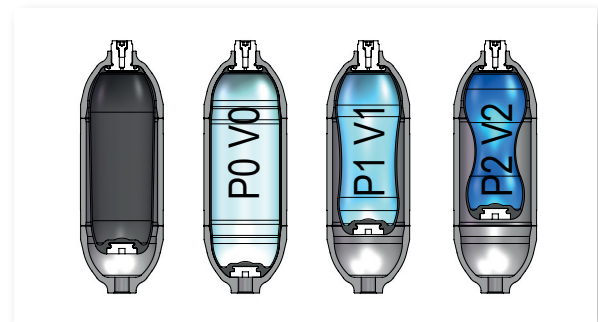

► Filling gas

Nitrogen only.



► Volumetric ratio (V0-V2)/V0

The recommended volumetric ratio of this type of accumulator is 0.75. For example: an ACS 4 accumulator can take in a maximum volume $0,75 V_0 = 0,75 \times 4 = 3$ litres.

► Tests et certificates

Designed and certified according to the European Directive 2014/68/UE. Other certificates on request.

ACS(L) Characteristics and dimensions

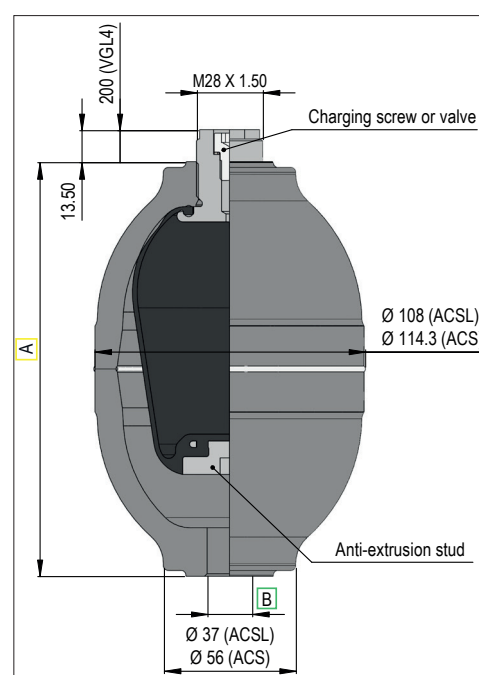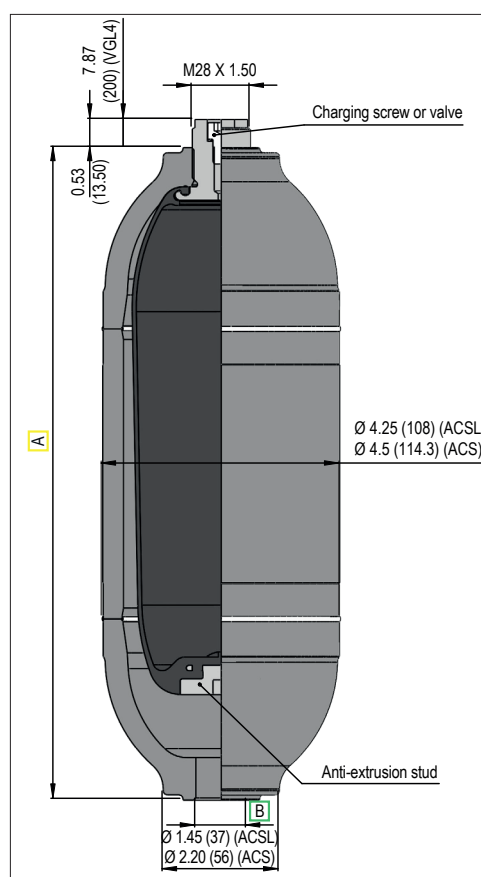

ACS(L) 0.7 L.

For **A** and **B** see the following table.

CHARACTERISTICS AND DIMENSIONS

	Volume (L)	Max. pressure (bar)	Weight (kg)	Length A (mm)	Diameter B (inches)
ACS	0.7	330	4	175	G1/2" or G3/4"
	1		5.9	236	
	1.5		7.8	315	
	2		9.9	392	
	2.5		11.5	463	G3/4"
	4		17.5	695	
	Volume (L)	Max. pressure (bar)	Weight (kg)	Length A mm	Diameter B (inches)
ACSL	0.7	250	3	175	G1/2" or G3/4"
	1		4.5	241	
	1.5		5.9	315	
	2		7.6	392	
	2.5		8.9	463	G3/4"
	4		13.9	696	

ACS(L) Order code system

ACS(L)	...	...	..	..	.	.
01	02	03	04	05	06	07

To obtain the code of your welded cylindrical accumulator ACS(L), complete the different parameters from 01 to 07 in the table on the left according to the options you require (see table below).

Accumulator type														
01		ACS	ACSL	ACS	ACSL	ACS	ACSL	ACS	ACSL	ACS	ACSL	ACS	ACSL	
	ACS 330 bar	•		•		•		•		•		•		ACS
	ACSL 250 bar		•		•		•		•		•		•	ACSL

Volume (L)							
02		0.7	1	1.5	2	2.5	4

Operating temperature															
03	-20 +100°C	•		•		•		•		•		•		•	S
	-40 +100°C		•				•			•			•		F

Fluid side connections								
04	Male M33x1.5 - Female G1/2"	•	•	•	•			01
	Male M33x1.5 - Female G1/2" + M33x1.5 nut	•	•	•	•			02
	Female G1/2"	•	•	•	•			10
	Female G3/4"	•	•	•	•	•	•	11
	Female G3/8"	•	•	•	•			12
	Female M16x1.5	•	•	•	•			13
	Female M18x1.5	•	•	•	•			14
	Female 3/4"-16UNF-2B	•	•	•	•	•	•	15
	Female 1"1/16-12UNF-2B	•	•	•	•	•	•	16
	Male G3/4"	•	•	•	•	•	•	50







Gas side connections															
05	Charging screw M28 x 1.5	•	•	•		•	•	•	•	•	•	•	•	•	V
	P1620 valve (M16x200)	•		•		•		•		•		•		•	W
	SCHRADER valve (8V1)	•		•		•		•		•		•		•	Y

Gas side connections protection								
06	Without protection (P1620, SCHRADER) Plastic plug (M28 x 1.5 screw)	•	•	•	•	•	•	N
	With metallic plug	•	•	•	•	•	•	P


Charging pressure	
07	Specify the charging pressure (in bar).

ACS(L) Fluid connections

► Hydraulic connections - Code 04

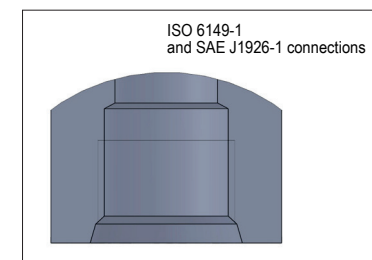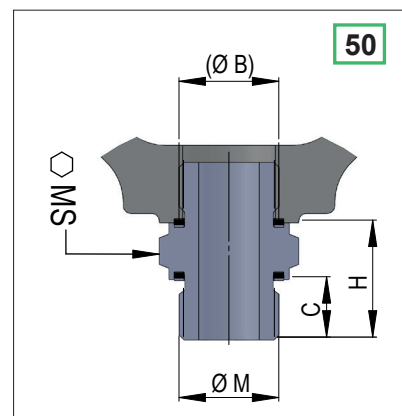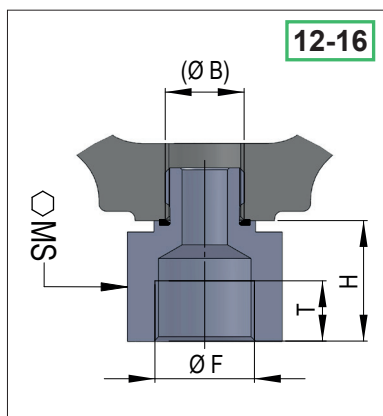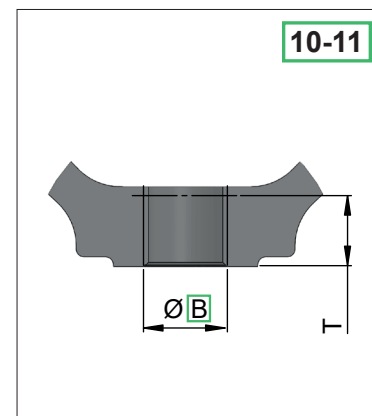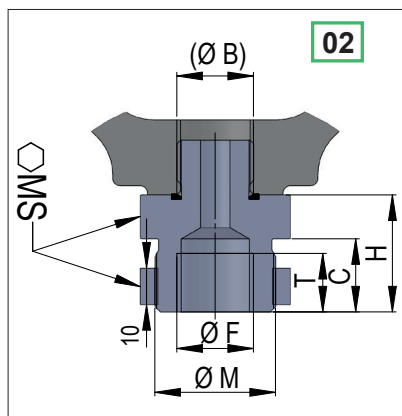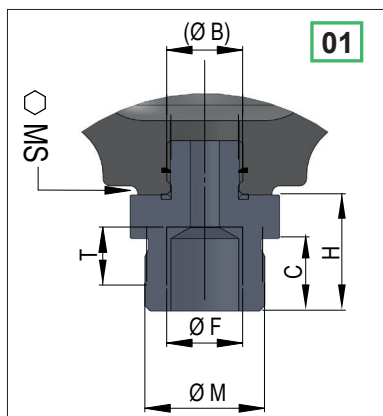

Connection for fittings : 13,15 and 16.

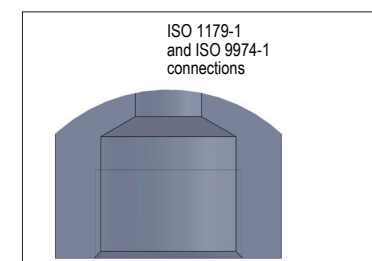


Connection for fittings : 02,01,12 and 14.

Code	Ø B	Ø F	H	SW	T useful	C	Ø M
01	G1/2"	G1/2 - ISO 1179-1	32	41	16	20	M33x1.5
02		without fitting	-	-	18	-	-
10		without fitting	-	-	18		
11	G3/4"	G3/8 - ISO 1179-1	10	32	12		
12		M16x1.5 - ISO 6149-1	10	32	13		
13		M18x1.5 - ISO 9974-1	10	32	12		
14		3/4-16UNF-2B - SAE J1926-1	25	32	14.3		
15		1 1/16-12UNF-2B - SAE J1926-1	27	46	19		
16		-	31	32	-		
50		-	31	32	-	16	G3/4 - DIN 3852-11

Dimensions in mm.


ACS(L) Gas connections

► Gas side connections - Code 05

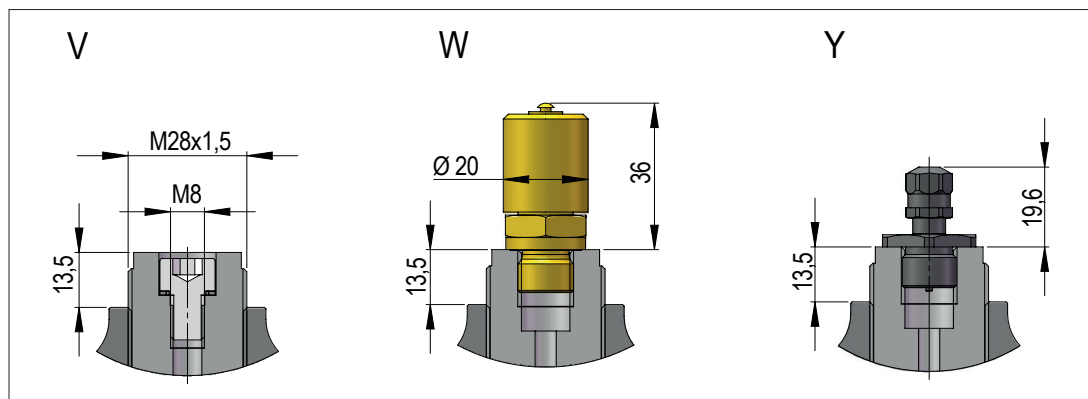

Dimensions in mm.

► Gas side options - Code 06

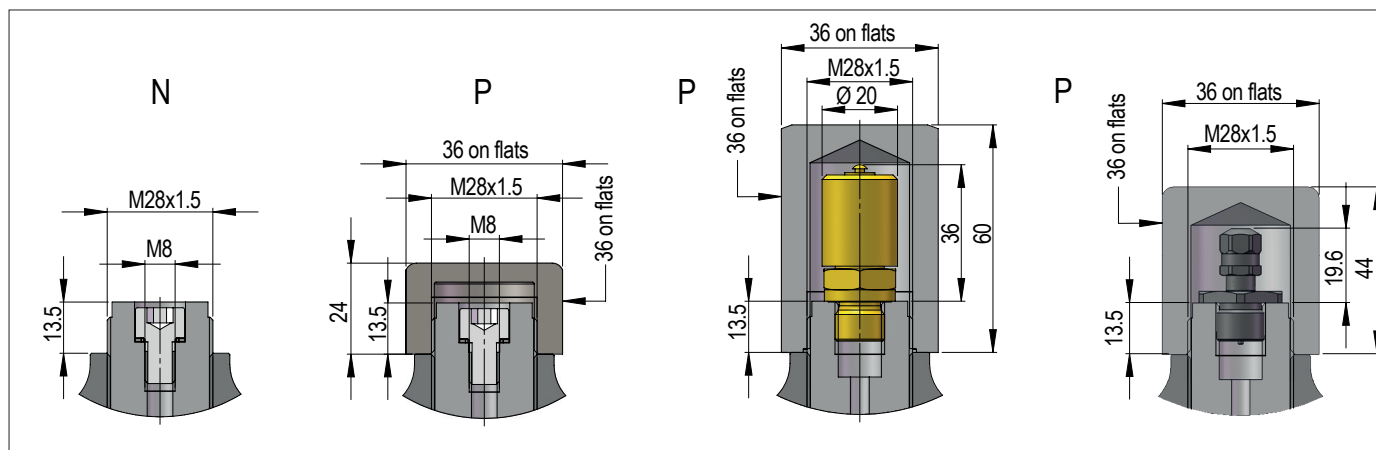


Dimensions in mm.

ACCESSORIES

► ACS(L) adjustable clamps ①


Volume (L)	Characteristics	Code LEDUC
0.7 - 1 - 1.5 2 - 2.5 - 4	Zinc-plated steel	254021
	Zinc-plated steel quick-tightening	254031
	Stainless steel	254032

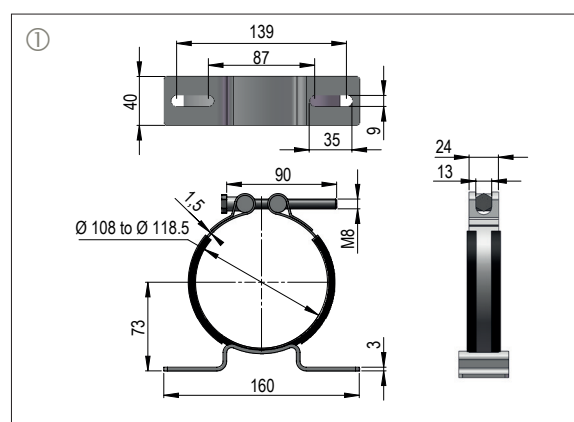

► ACS(L) fixed clamp ②

Volume (L)	Characteristics	Code LEDUC
0.7 - 1 - 1.5	Zinc-plated steel	C001028

Tightening torque of the fixation screws: 20 Nm.

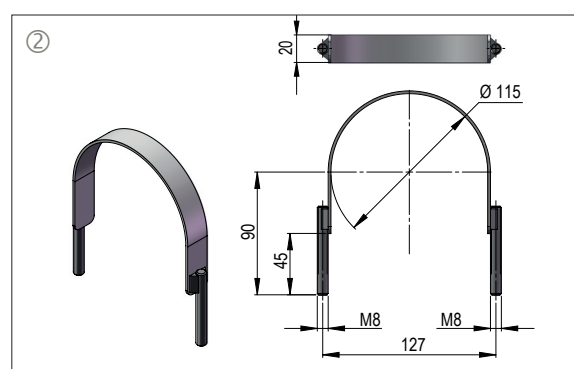

► ACS(L) clamps ③

Volume (L)	Characteristics	Code LEDUC
0.7 - 1 - 1.5 2 - 2.5 - 4	Zinc-plated steel	C001031
	Stainless steel	C001032

Tightening torque of the fixation screws: 20 Nm.

