

TSO-H308/H208

2MP 30x, 20x Zoom Hybrid(Network+HD-SDI) Speed PTZ Dome Camera


HD-SDI
ONVIF



Features

- 2MP High Resolution Video output
- NETWORK, HD-SDI, CVBS
- 30x Optical Zoom(4.3mm~129mm) & 32x Digital Zoom
- 20x Optical Zoom(5.2mm~104mm) & 32x Digital Zoom
- Day & Night(ICR)
- Real-time True WDR
- Digital Noise Reduction(2D+3D)
- Digital Image Stabilization
- Privacy Mask Function
- High Light Compensation
- Defog Function
- 255 Presets, 8 Tours, 8 Scans, 4 Patterns
- 360° Endless Pan Rotation
- -40°C~+60°C All weather High Tolerance
- Corrosion-resistant external PC housing
- Weather-proof IP66 outdoor housing
- Airflow Control System
- IPv4, IPv6 support
- H.265, H.264, MJPEG video compression
- Less than 200ms latency with 2MP video streaming
- Edge storage up to 64GB
- Bi-directional audio support

Dimensions

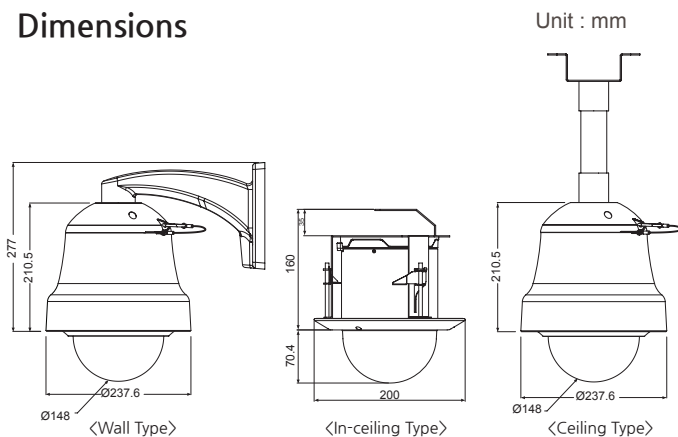

GENERAL	
Power Source	AC21~26V 60Hz / 50Hz(Power adaptor not included)
Power Consumption	12W / Max 75W(Fan & Heater)
Operating Temperature	-40°C ~ +60°C / 0% ~ 90% RH
Ingress Protection	IP66
Material	Aluminum
Dimensions	237(Ø) x 310(H) mm
Weight	3.8Kg

MODEL	TSO-H308	TSO-H208
CAMERA		
Image Sensor	1/3" Panasonic CMOS Sensor	1/2.8" Sony Starvis CMOS Sensor
Total Pixels	1981 (H) x 1288 (V) = 2.55M Pixels	1945 (H) x 1109 (V) = 2.16M pixels
Active Pixels	1944 (H) x 1212 (V) = 2.35M Pixels	1937 (H) x 1097 (V) = 2.12M pixels
Video Format	1080p@30/25fps, 720p@60/50fps, 720p@30/25fps	
Min. Illumination	Color	0.05 lux / DSS 0.002 lux
	BW	0.005lux / DSS 0.0001 lux
S/N Ratio	more than 50dB (AGC off)	
Video Output	NETWORK, HD-SDI, CVBS	

LENS	30x	20x
Lens Type	30x Day & Night Zoom Lens	20x Day & Night Zoom Lens
Zoom Ratio	Optical 30x, Digital 32x Zoom	Optical 20x, Digital 32x Zoom
Focal Length	f = 4.3 mm ~ 129.0 mm	f = 5.2 mm ~ 104 mm
Aperture Ratio	F1.6 (wide) ~ F4.7 (tele)	F1.5 (wide) ~ F3.5 (tele)
Angle Of View (D, H, V)	WIDE	38.4°
	TELE	1.36°

PAN / TILT	
Pan	360° Continuous Pan, 0.1° to 120°/sec
Pan Speed	360°/sec, ± 0.1° Accuracy
Tilt	0° to 90° tilt angle, 0.1° to 120°/sec.
Tilt Speed	250°/sec, ± 0.05° Accuracy
Preset	255 points, less than 0.1° accuracy

CAMERA FUNCTIONS	
Camera Title	ID / Title / Zoom Ratio / System Message
Day & Night	Auto / Day / Night / Ext-in
WDR/BLC	Off / WDR / BLC / HLC
ACE	Off / Low / Middle / High
DNR	Auto / Off / Low / Middle / High
Defog	Off / On(Auto / Manual)
Image Stabilization	Off / On
Privacy Mask	Off / On (24 positions)
Digital Slow Shutter	Off / x2 / x4 / x8 / x16 / x32
Gain Control	Off / On
White Balance	Auto / One Push / Manual / Indoor / Outdoor
Shutter Speed	1/30(25) ~ 1/30,000 sec
E.Zoom	Off / x2 ~ x32
Digital Flip	Off / H / V / H&V
Digital I/O	8 alarm / 2 relay out
Remote Control Interface	RS-422, 485
Protocol	Pelco-D / Pelco-P / WONWOO

NETWORK	
Ethernet	RJ-45 (10/100BASE-T)
Video Compression	H.265, H.264, MJPEG
Resolution	1920x1080, 1280x720, 1024x576, 640x360, D1, 4CIF, VGA, CIF, QVGA
bit rate	32Kbps~8Mbps (CBR/VBR Support)
Max. frame rate	30fps@1920x1080
Streaming Capability	Supports up to Triple streams
Audio In / Out	Mic In / Audio Out
Audio Compression	G.711
Audio Communication	Bi-directional audio
Protocol	TCP, UDP, IP, HTTP, DHCP, DNS, ICMP, ARP, IPv4 / IPv6, DDNS, NTP, SNMP, Syslog, UPnP, Bonjour, ZeroConf, RTP/RTSP, Onvif, Genetec Protocol
Storage	SDXC (up to 64GB, MicroSD)
Security	MD5 Password / iptables (firewall) / SSL
Webpage Language	Korean, English
Web Viewer	IE8.0 or above, Microsoft Edge, Firefox, Google Chrome, Apple Safari