
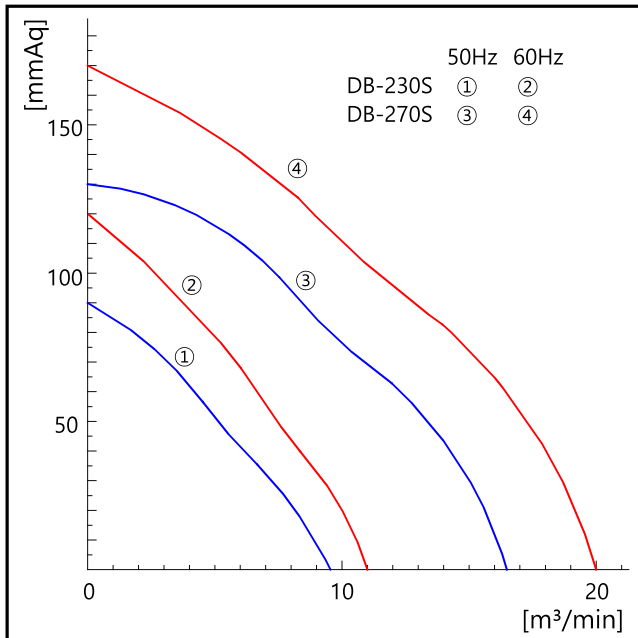


제품명 Model	전원 Source (V)	날개크기 Impeller Size (cm)	주파수 Fre- quency (Hz)	전류 Current (A)	소비전력 Power Input (W)	회전수 Revolution per minute (RPM)	모터출력 Motor Output (KW)	극수 Pole (P)	최대풍량 Air Volume (CMM) (CFM)		최대정압 Air Pressure (mmAq) (pa)		중량 Weight (kg)
DB-230S	1Ø 220V	20.5	50	1.10	230	2,940	0.25	2	9.5	335	90	885	12.5
			60	1.65	350	3,435			11	390	120	1,175	
	3Ø 220/380V	20.5	50	1.70/0.98	270	2,900	0.25	2	9.5	335	90	885	12.5
			60	1.45/0.84	360	3,455			11	390	120	1,175	
DB-270S	1Ø 220V	24.5	50	3.30	560	2,910	0.4	2	17.5	620	130	1,275	15.5
			60	3.85	760	3,400			20	705	170	1,665	
	3Ø 220/380V	24.5	50	2.20/1.27	520	2,920	0.4	2	17.5	620	130	1,275	15.5
			60	2.50/1.44	740	3,400			20	705	170	1,665	

◆ DB-270S 역방향 주문가능

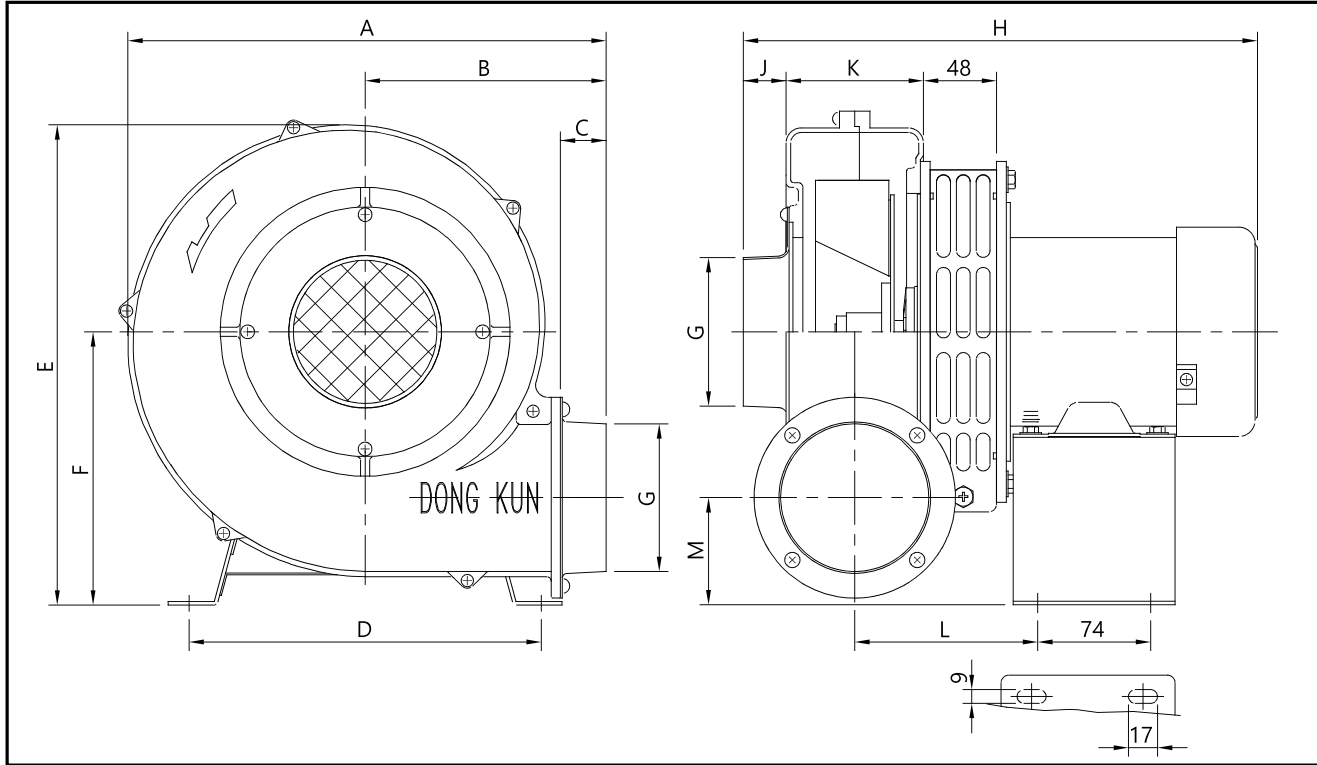

Dimension

Model	A	B	C	D	E	F
DB-230S	313	158	30	230	315	180
DB-270S	386	197	40	256	387	222
Model	G	H	J	K	L	M
DB-230S	Ø100	337	28	90	120	71
DB-270S	Ø125	385	38	114	137	89



◆ 제품 특징

- 날개 출구각이 90° 또는 거기에 가까운 각도를 유지되는 PLATE FAN 사용
- 고풍압, 저풍량에 적합하며 타기종보다 효율이 우수함
- 견고한 구조, 취급 및 설치가 용이
- 중간 차단 팬 부착한 고온용 송풍기
- 흡입온도 150 °C까지 사용가능

◆ 제품 사용장소

- 빌딩, 아파트, 상점, 공장, 창고 등의 일반환기, 공기조화, 냉난방 송풍, 급배기용으로 사용
- 양돈, 양계사 환기 및 급기로 적합

◆ Feature

- Radial Blower with plate fan blade.
- High-pressure, Low-Air Volume. High-efficiency.
- Durable instruction. Easy for installation and handling.
- High temperature blower with cutting fan in the middle.
- Induction air temperature up to 150°C

◆ Available place

- Ventilating or Air conditioning at Building, Apartment, Store, Factory, Warehouse
- Cooling & Heating, Blow, Exhausting.
- Ideal for piggery, poultry farm.