



PA Series


Variable Area Flowmeter

- Field indicated Flow meter for use without power supply
- Designed to fit into small spaces for easy installation in general factory piping lines and panels
- Easily check the flow of fluid (bubble, color, etc.)

PA-50 Series General Specifications

Size	1/4" ~ 1"
Process Connection	PT, NPT
Measured Fluid	Gas and Liquid
Range Ability	10 : 1
Accuracy	±2.0 % F.S
Fluid Temperature	Max. 120 °C

STRUCTURAL DRAWING

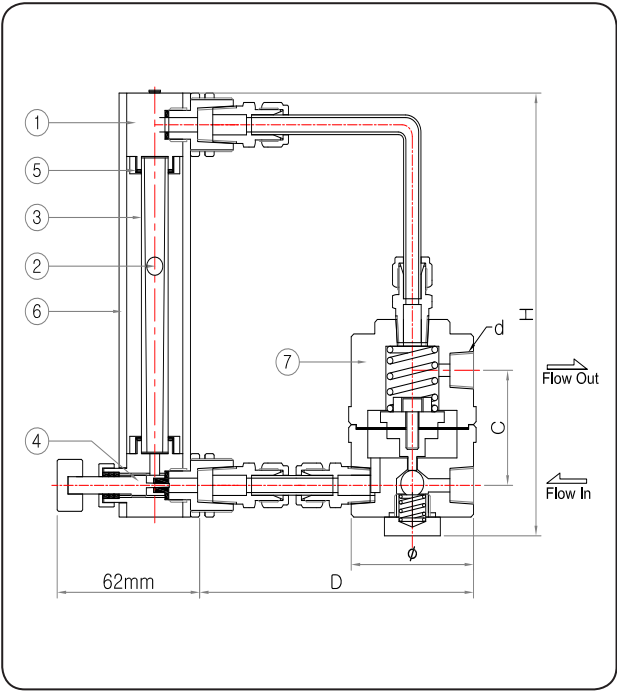

STANDARD MATERIAL

No.	Description	Material	
		A	B
1	Body	304SS	316SS(L)
2	Float	304SS, AGATE	316SS(L)
3	taper tube	PYERX GLASS	
4	Needle valve	304SS	316SS(L)
5	Packing	NBR, PTFE	
6	Cover	ACRYL	
7	Diaphragm	304SS	316SS(L)

DIMENSIONS

Dia	Code	H	C	D	Ø	d
	8A	155	125	36	19	PT1/4B
	15A	240	200	40	25	PT1/2B
	20A	290	240	49	34	PT3/4B