


FW7601-FTM

2MP Indoor Plastic Dome



▲
FW7601-FTM
2MP Indoor Plastic Dome

FW7601-FTM is a high quality Plastic Indoor Dome type IP camera which is equipped with 2.13MP(effective pixel) Progressive Scan CMOS image Sensor. With the highest sensitivity Starvis sensor, It is especially superior in low light condition. As it supports simultaneous H.265, H.264 and MJPEG Video Compression, less network bandwidth and storage space required. It also delivers high quality video image at 30 fps@Full HD(1920X1080) in progressive mode.

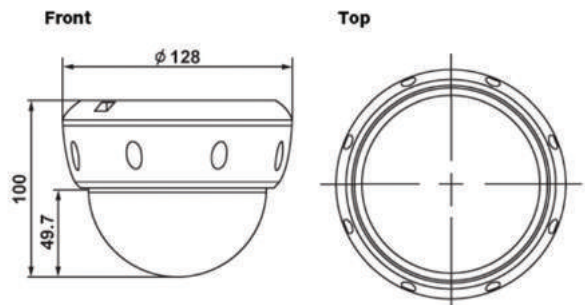

▲
FW7601-FTM
2MP Indoor Plastic Dome

• Key Features

- Ambarella platform - Backdoor Issue free
- Sony Starvis (1/2.8") 2.13MP PS CMOS Sensor
- Night Color with super high sensitive sensor
- 2.8~12.0mm Motorized Auto Focus Lens
- Quadruple Stream (H.265, H.264, M-JPEG, JPEG)
- Max. 30fps @ 2MP (1920x1080)
- DOL WDR (>120dB)
- Night Color level adjustment (B/W, 10, 20, 30, 40, 50)
- Shutter limit (Min./Max.) setting
 - Good for the better night time moving object image
 - To avoid saturation under strong back light or IR reflection
- OnVIF (Profile S) standard

• Tech Notes

IP filtering

The IP filtering enables you to control what IP traffic you want to allow into and out of your IP camera. Use IP filtering to help protect your IP camera by filtering access from other IP address set for filtering.

Management white list

A whitelist is a list of items that are granted access to a certain system or protocol. When a whitelist is used, all entities are denied access, except those included in the whitelist. ... A network administrator may configure a firewall with a whitelist that only allows specific IP addresses to access the IP camera or NVRs.

FW7601-FTM

► Technical Specifications

Camera

Imaging Sensor	1/2.8" 2.13MP Sony Starvis PS CMOS Sensor
Lens	2.8~12.0mm Motorized Auto Focus
Day & Night	True Day & Night (ICR)
Min. Illumination	Color : 0.05 lux B/W : 0.0005 lux / 0 lux (IR On)

Video Stream

System	Ambarella 32bit Embedded Linux 256Mbyte SDRAM, 128Mbyte NAND Flash
Compression	H.265, H.264, M-JPEG, JPEG
Resolution	1920x1080, 1280x720, 704x480, 640x352, 320x176, 160x96
Frame rate	30fps/25fps @ Full-HD
Video Stream	Quadruple Streaming, selectable : H.265/H.264/MJPEG, Frame rate, Bitrate, VBR/AVBR/CBR/ACBR, GOP

Video Setting

Motion Detection	4 Areas
Audio Detection	Enable (sensitivity setting) / Disable
Privacy Masking	8 Areas
Video Analytics	Optional (Face Detection, Tampering, Tripwire etc.)
Smart Video	ROI
Exposure Mode	Indoor / Outdoor
AE Metering Mode	Spot / Center / Average / Venter Flip
Shutter Control	Manual (Min./Max. Setting) / Auto
Max AGC Gain	0~72
Sense Up Level	Off / 1 / 2
Back Light Compensation	Enable / Disable
Auto Exposure Weight	25% ~ 400%
WDR	DOL WDR (Enable / Disable), D-WDR 0~128
Image Adjustment	Brightness / Contrast / Hue / Saturation / Sharpness
White Balance	Auto / Manual / 9 Special Condition / Custom
3DNR	0~11
Day & Night Control	Color / Black&White / AutoNight Color (B/W, 10, 20, 30, 40, 50)
Image Direction	Vertical Flip / Horizontal Flip / Corridor Mode

Illuminator

Type	30 IR LEDs
Distance	Max. 30Meter

Network

Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List
Supported protocols	HTTP, RTP/RTSP(Uni/Multicast), TCP/IP(v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP, DHCP, NTP, SMTP client, uPnP&etc
DDNS	www.ipcctvdns.com
Interface	RJ45 Ethernet 10/100Mbps

System Intergration

Programing Interface	SDK, OnVIF Profile S
Video Analytic	Motion detection, Optional: ROI, Tripwire, Tampering, Face Detection
Triggering Event	Motion detection, triggering DI, triggering serial input, connected/disconnected, boot finished
Action on Event	Pre-alarm & Post-alarm buffer, Upload FTP, Email notification, FCM Google notification
Connection	1 DI/ 1DO, RS485

Onboard storage

Type	1 MicroSD Slot
Recording	Always, Schedule, Event, Schedule & Event
Playback	Internet Explorer, FlexWATCH NVR/ CMS/ Mobile App

Video/Audio

Video Out	-
Audio Compression	-
Audio stream	-
Connection	-

General

Case	Plastic
Power Supply	SMPS, DC12V / 1A PoE : IEEE 802.3af
Power Consumption	Max. 5.3W
Operating Environment	-10℃ ~ +50℃, 10% ~ 90% RH
Dimension	120 Dome, 100(H) mm
Weight	About 500g without Power Supply
Approval	KC, CE, FCC, RoHS
Accessories	-
Bundle Software	IP Installer, SMVP, Smart NVR Lite