


FWR228-01N

64CH, Rack-mountable NVR



▲
FWR228-01N
64CH, Rack-mountable NVR

FWR228-01N is a 19” rack type stand-alone Network Video Recorder. Supports H.265, H.264 and M-JPEG streaming from FlexWATCH cameras and others supporting ONVIF. Up to 64Ch IP cameras can be registered with 480fps@2M Full-HD live view from video output(HDMI, VGA, BNC) and 1920fps@2M Full-HD for real-time recording up to 64 IP cameras with 8 internal SATA connection up to 64TB(8x8TB) is supported. It also supports RAID 5 as an option for professional system Integration market which requires secure recording any time, FWR228-01N is the best IP solution for large scale system Integrator anytime, anywhere.

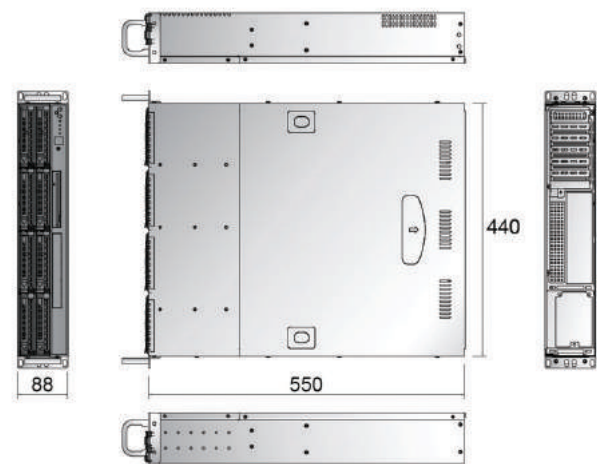

▲
FWR228-01N
64CH, Rack-mountable NVR

• Key Features

- 64Ch, Streaming
- Real time live viewing
Max. 480fps @ FULL-HD(1920x1080), 480fps @ D1
- Real time recording
Max. 1920fps @ FULL-HD(1920x1080)
- Supports H.265 / H.264 / MJPEG codec
- Video, Audio, PTZ, DI/DO control
- 1 HDMI / 1 VGA output for local display
- 3 USB port for mouse / keyboard etc
(USB 2.0 x 2 / USB 3.0 x 1)
- 64TB (Max. 8TB x 8HDD) support
- Support RAID 5 as an option
- 4K Recording and Playback

• Tech Notes

Relay server: Re-streaming

NVR works as a restreaming server that registers FlexWATCH® IP cameras and other 3rd party ONVIF IP Cameras and re-transmits the Video streams up to 4 concurrent streams to other various client software or NVRs.

I Frame Recording

It records only “I picture” at each GOP and discards “B picture” and “P picture”. “I frame recording mode” at IP surveillance system is an alternative method to support the pre-post alarm recording function of DVR system.

FWR228-01N

► Technical Specifications

NVR

Max. Channel 64Ch, IP Cameras

Video

Max. Streaming Rate Max. 480fps @ Full-HD
Max. 480fps @ D1

Supported Codec H.265, H.264, MJPEG

Streaming Function Retransmission (Proxy)

PTZ Remote PTZ control

Recording

Max. Recording Rate Max. 1920fps @ Full-HD or 4K

Stream Video, Audio, Data

HDD Support Supports 8 SATA HDDs up to 8TB / each (Max.64TB)

RAID RAID 5 Supports (Optional)

Condition Always, Motion, Event, Schedule

Interface

Video Out 1 HDMI, 1 VGA

Audio In/Out 2 way (1 in, 1 out)

Audio Compression 8bit G.711, 8Khz, 8Kbyte/sec

Alarm In/Out 16 DI, 4 DO (Direct On/Off)

Serial Port RS-232C

Peripherals USB2.0 x 2 + USB3.0 x 1

Network

WAN (Ethernet) 10/100/1000-base-T Ethernet (auto sensing)

LAN (Ethernet) 10/100/1000-base-T Ethernet (auto sensing)

Protocol HTTP, TCP/IP, UDP, FTP, Telnet, RARP, DHCP, NTP, SMTP client, uPNP And etc.

Viewer Browsers (Microsoft Internet Explorer), CMS, VLC

Player Browsers (Microsoft Internet Explorer), CMS, VLC

Dynamic IP DDNS (www.ipcctvdns.com)

Smart Solution FlexWATCH Mobile (iOS, Andriod), IPCAMVISION (iOS, Android)

Security IP Filtering, Encrypted & Basic Authentication, HTTPS, Management White List

Hardware

System 32bit Embedded Linux, ARM Cortex A17 quad-core@maximum 1.4 GHz, SDRAM 256Mbyte, NAND Flash 128MBytes

Approvals KC, FCC, CE, RoHS, UL

Working Condition 0℃ ~ +50℃ (32℉ ~ 122℉), 10% ~ 80% RH

Power Supply INPUT : 100-240VAC, 50~60Hz
OUTPUT : 12VDC @ 17A

Power Consumption Max. 300W

Dimension 440(W) x 550(D) x 88(H) mm

Weight About 8,500g without HDD

Built-in Software Features

Mirroring Function

By using the mirroring function, FlexWATCH NVR can monitor and playback other adjacent FlexWATCH NVRs and cameras (SD). Each NVR has an ability to control all video/audio and command for PTZ control with low latency.

Audio Broadcasting

By Audio broadcasting function, FlexWATCH® NVR can broadcast audio with the mic. on FlexWATCH® NVR to multiple speakers at FlexWATCH® IP cameras connected in the network. It can simultaneously broadcast the audio up to 32ch of IP cameras by any GROUPS at the same time.