

Current Transformer (25.8kV)



- 옥내용 (For Indoor)
- 권선형 (Winding Type)
- 일반 계기 및 보호 계전기용 (For Metering & Protection)
- Epoxy Mold로 절연특성 강화
(Insulation : Epoxy Vacuum Molding)


■ For Metering

Type	WE 8 or WE 8 D	
Standard	KS C 1706	IEC 61869-2
Max. Voltage	25.8 kV	24 kV
Insulation Level	25.8 / 50 / 125 kV (20 B)	24 / 50 / 125 kV
Short time Current Max. kA	12.5 kA / 1 sec.	
Rated Primary Current	300 A or 300 / 150A 이하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 40 VA	
Accuracy Class	1.0	
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 19 kg	

■ For Protection

Type	WE 8 R or WE 8 D R	
Standard	JEC 1201	IEC 61869-2
Max. Voltage	23 kV	24 kV
Insulation Level	23 / 50 / 125 kV	24 / 50 / 125 kV
Short time Current Max. kA	12.5 kA / 1 sec.	
Rated Primary Current	300 A or 300 / 150A 이하	
Rated Secondary Current	5 or 1 A	
Rated Burden	15 ~ 40 VA	
Accuracy Class	1P	5P, 10P
Over Current Factor	n > 10 or 20	n > 10 or 20
Rated Continuous Thermal Current	1.0 In	1.2 In
Frequency	60 Hz (Others on request)	
Weight	≒ 19 kg	

■ Dimension & Drawing

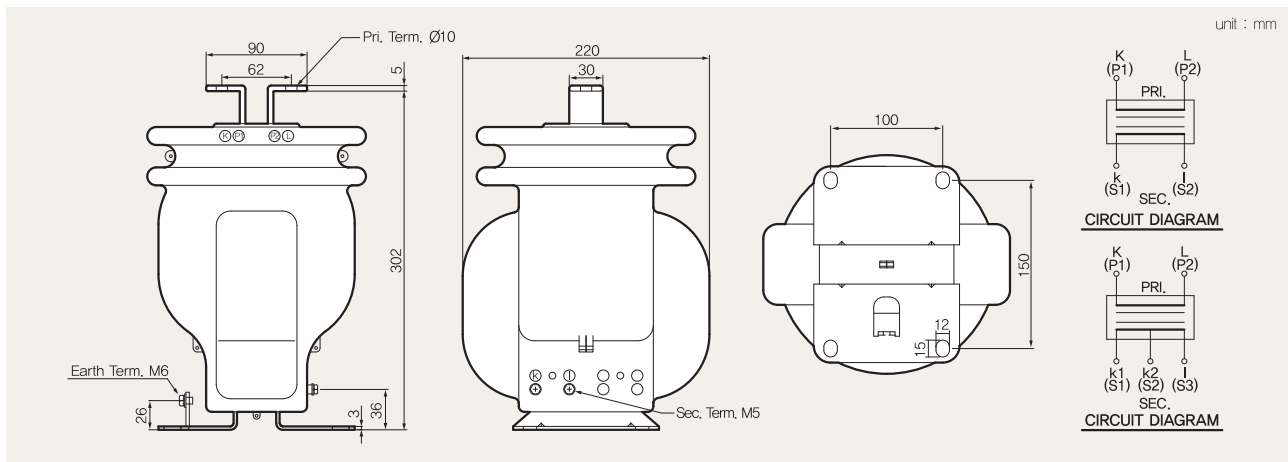

■ Specification

Service	Type	Short time Current	Current Ratio (A)	KS C 1706		JEC 1201			IEC 61869-2		
				Class	Burden	Class	Burden	n >	Class	Burden	n >
Metering	WE8 (1 Core Single Ratio)	40 In	5 ~ 300 / 5	0.5	15	—	—	—	0.5	15	—
		75 In	5 ~ 250 / 5								
		150 In	5 ~ 120 / 5								
		300In	5 ~ 60 / 5	1.0	40	—	—	—	1.0	30	—
		8 kA	20 ~ 300 / 5								
		12.5 kA	25 ~ 300 / 5								
	WE8D (1 Core Double Ratio)	40 In	10,5 ~ 300,150 / 5	0.5	15	—	—	—	0.5	15	—
		75 In	10,5 ~ 240,120 / 5								
		150 In	10,5 ~ 120,60 / 5								
		300In	10,5 ~ 60,30 / 5	1.0	40	—	—	—	1.0	30	—
		8 kA	40,20 ~ 300,150 / 5								
		12.5 kA	50,25 ~ 300,150 / 5								
Protection	WE8R (1 Core Single Ratio)	40 In	5 ~ 300 / 5	—	—	1P	15	10	5P 10P	15	10
		75 In	5 ~ 250 / 5								
		150 In	5 ~ 120 / 5								
		300In	5 ~ 60 / 5								
		8 kA	20 ~ 300 / 5								
		12.5 kA	25 ~ 300 / 5								
		40 In	5 ~ 300 / 5	—	—	1P	15 40	20 10	5P 10P	15 30	20 10
		75 In	5 ~ 250 / 5								
		150 In	5 ~ 120 / 5								
		8 kA	40 ~ 300 / 5								
		12.5 kA	50 ~ 300 / 5								
	WE8DR (1 Core Double Ratio)	40 In	5 ~ 300 / 5	—	—	1P	40	20	5P 10P	30	20
		75 In	5 ~ 250 / 5								
		8 kA	80 ~ 300 / 5								
		12.5 kA	100 ~ 300 / 5								
		40 In	10,5 ~ 300,150 / 5	—	—	1P	15	10/5	5P 10P	15	10/5
		75 In	10,5 ~ 240,120 / 5								
		150 In	10,5 ~ 120,60 / 5								
		300In	10,5 ~ 60,30 / 5								
		8 kA	40,20 ~ 300,150 / 5								
		12.5 kA	50,25 ~ 300,150 / 5								
		40 In	10,5 ~ 300,150 / 5	—	—	1P	15 40	20/10 10/5	5P 10P	15 30	20/10 10/5
		75 In	10,5 ~ 240,120 / 5								
		150 In	10,5 ~ 120,60 / 5								
		8 kA	80,40 ~ 300,150 / 5								
		12.5 kA	100,50 ~ 300,150 / 5								
		40 In	10,5 ~ 300,150 / 5	—	—	1P	40	20/10	5P 10P	30	20/10
		75 In	10,5 ~ 240,120 / 5								
		8 kA	160,80 ~ 300,150 / 5								
		12.5 kA	200,100 ~ 300,150 / 5								

※ IEEE C 57.13 규격에 의한 제품의 생산이 가능하며, 계급, 부담, 과전류 정수 등의 사양변경에 따라 다양한 생산도 가능합니다.

Can manufacture the products based on IEEE C 57.13 standards, and also Can manufacture the various products by change of specification, such as the Accuracy class, Burden and Over-current factor.

※ 단시간 과전류값은 2차측에 정격 부담의 25% 부담을 접속한 상태에서의 보증치입니다.

Short time current being subject to 25% rated burden connection at secondary side for all ratios.