


SINCE 1991



# Automatic Cutting Machine Series KM-3600



## ● Digital Control Panel



- Digital Window for easy set-up
- Push button set-up for all machine functions
- Display the number of pieces needed
- Five-memory storage
- Various warning messages and alarm functions



## ● Various sensors

- Material run-out sensor
- Default Value sensor for blade height
- Proximity sensor
- Power sensor to save working data in case of power failure


## ● Feeding Part

- Material Hanger and Guide
- Aux. Roller and Feeding roller
- A knob for roller lift-up
- Roller friction adjusting nut
- Material pressing plate and adjusting nut
- Two pairs of gear-type rollers for feeding


## ● Cutting Part

- Upper/Lower/Wing blades
- Carbonated Blade life two times the life of competitor model
- Operate friendly design for easy replacement


## ● Options




**COP-311**  
**Material**  
**Pre-feeder**  
•less than  
100mm wide




**COP-312**  
**Material**  
**Pre-feeder**  
•more than  
100mm wide



**COP-314**  
**Static**  
**Remover**  
•Static  
remaining  
between  
blades and  
material



**C O P - 3 1 3**  
**Tube Spreading Unit**  
•Increases productivity by  
spreading the compressed  
vinyl tube to be cut

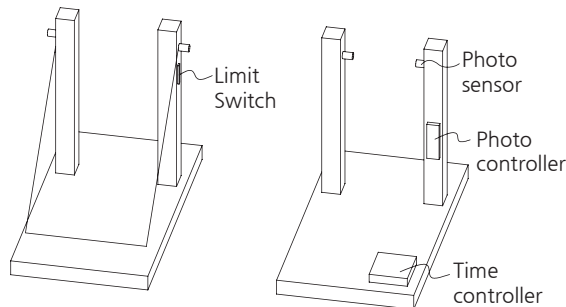

**C O P -**  
**315/316**  
**Limit switch/**  
**Photo sensor**  
•Cuts costs by  
connecting to  
the extruder  
machine  
and output  
materials

Precise,  
Convenient,  
Accurate!

## ● Specifications

Dimension (W x D x H)	435 X 480 X 380
Weight (KG)	38
Cutting material	Corrugated Hose(Up to 40pie)
Max. cutting width	100mm
Power supply	110/220 VAC, 50/60Hz, Single Phase
Power consumption (Wat.)	22 W ~ 150 W

\* Specifications are subject to change without notice.

# Cutting

940 Gosaek-dong, Gwonseon-gu,  
Suwon-si, Kyeonggi-do, 441-813, Korea  
Tel. 031-8012-9900 / Fax. 031-8012-9999

**KM digitech**

[www.youtube.com/user/kmdigitech](http://www.youtube.com/user/kmdigitech)