


Voltage Transformer (12kV)



- 옥내용
For Indoor
- 단상 비접지형
Single Phase,
Line to Line Voltage Transformer
- 일반 계기 및 보호계전기 용
For Metering & Protection
- Epoxy Mold로 절연특성 강화
Insulation : Epoxy Vacuum Molding.

Dimension & Drawing

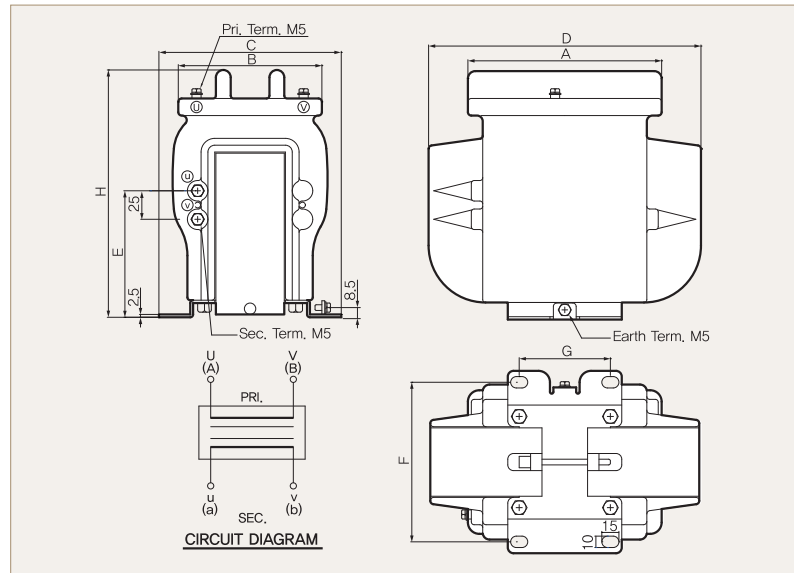

unit : mm

Type	A	B	C	D	E	H	F	G
LV25	170	126	160	197	100	206	140	80
LV26				239	108	218		

Specification

Standard	KS C 1706	JEC 1201	IEC 61869-3
Max. Voltage	11.5 kV	11.5 kV	12 kV
Primary Voltage	11000 or 11400 V		
Secondary Voltage	110 V		
Insulation Level	11.5 / 28 / 75 kV (10B)	11.5 / 28 / 75 kV	12 / 28 / 75 kV
Over Voltage Factor	1.1Vn Continuous		1.2Vn Continuous
Frequency	60 Hz (Others on request)		

※ 상기의 정격 1차, 2차 전압은 표준형이며, 그 외의 전압비의 제품도 생산 가능합니다.

Above rated primary and secondary voltage is standard type, and besides, can be manufacture the another voltage ratio products.

※ 본 제품은 1차측 Fuse가 부착되어 있지 않습니다. This voltage transformers are unfused.

Rated Output

Accuracy Class			Type & Rated Output Burden	
KS C 1706	JEC 1201	IEC 61869-3	LV25	LV26
0.5	—	0.5	50	100
1.0	1P	1.0	100	200
3.0	3P	3.0	200	500
Weight			≒ 12.0 kg	≒ 17.0 kg