

CONVEYOR BELT OPTIMISATION

LIFTUBE®





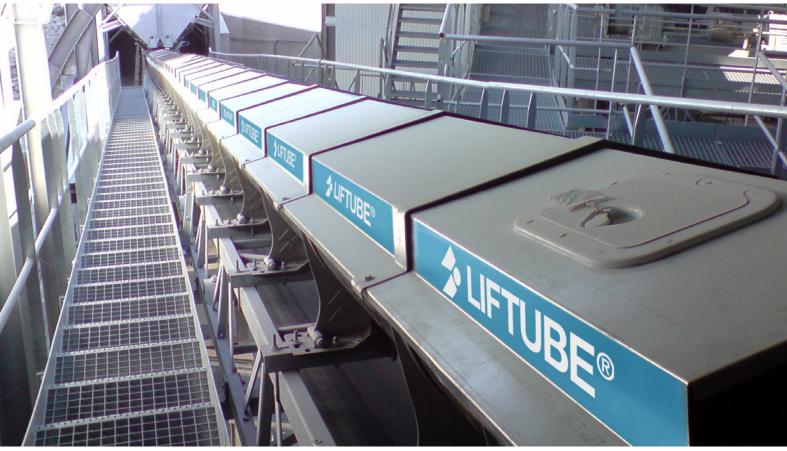



INNOVATIVE PROCESSES FOR BULK HANDLING





LIFTUBE®

OUR SOLUTION

Optimise the sealing and safety of all conveyor belts between the loading and unloading points.

This solution enables you to comply with environmental and safety standards while reducing your operating, maintenance and cleaning costs.

OUR CUSTOMERS

- Cement plants
- Steel industry
- Foundries
- Thermal power plants
- Cleaning companies
- Glass factories
- Mines and quarries
- Limeworks
- Coke works
- Incineration plants
- Mills
- Food industry
- Petrochemicals
- Chemicals
- And more...

ADVANTAGES


- Sealing (reduction of dust emissions)
- Staff safety
- Fast return on investment
- Removal of material overflow
- Easy and minimal maintenance

RELATED SERVICES

- Visits & technical recommendations (proportioning and layout)
- Supply of the installation plan
- We offer complete installation of our equipment if needed
- Up to 3-year warranty
- After-sales service & maintenance contract
- Statutory monitoring

OPTIONS

- High temperature
- ATEX zone 21 😓
- Food industry
- Auto-extinguishing

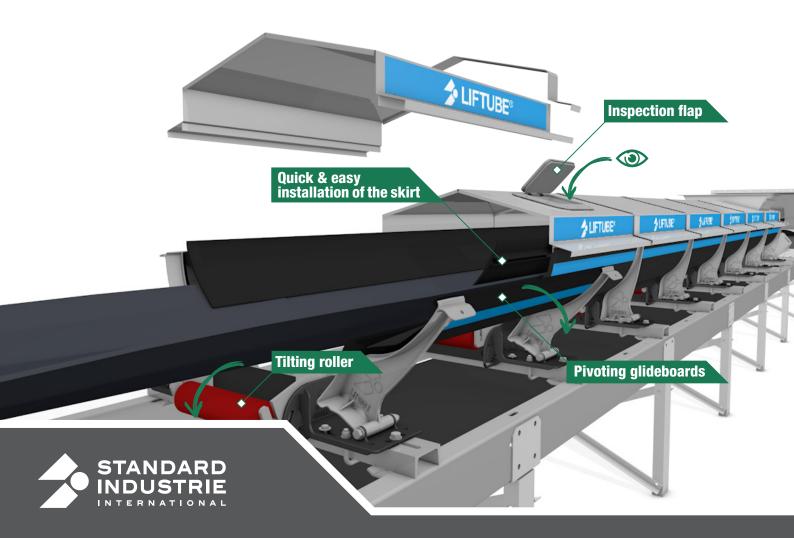

LIFTUBE®



OUR ACCESSORIES FOR CONVEYOR BELT: YOUR ANSWER FOR PROBLEMS OF SEALING & SAFETY

The patented LIFTUBE® and the dust-collector are accessories for conveyor belt.


The **LIFTUBE®** system enables the belt to run on a central horizontal tilting roller and to slide on the edges, which also tilt.

A removable hood can be adapted to the equipment to reduce belt conveyor dust emission. Only the size of the hood and the central horizontal roller depends on the width of the conveyor. The conveyor belt and rollers can be easily accessed thanks to innovative tilting legs.

Belt width: From 500 to 1,400 mm
Belt speed: From 0,05 to 5 m/s
Output: Up to 1,500 t/h
Particle size: Up to 500 mm

Density: Up to 4Product temperature: Up to 300 °C

Modules: Standard & EvolutiveInstallation: Suitable for both new

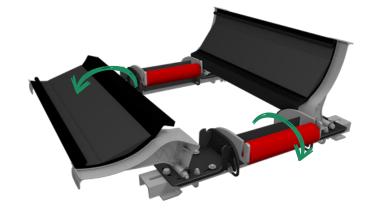


The **dust-collector** is a 2m-**LIFTUBE**® kit with filtering unit atop of hood – air-jet filter cleaning. Allow reduction of very fine dust emission just after discharge.

or existing conveyors

CONTACT US!

11 BRANCHES & REPRESENTATIVES AROUND THE WORLD

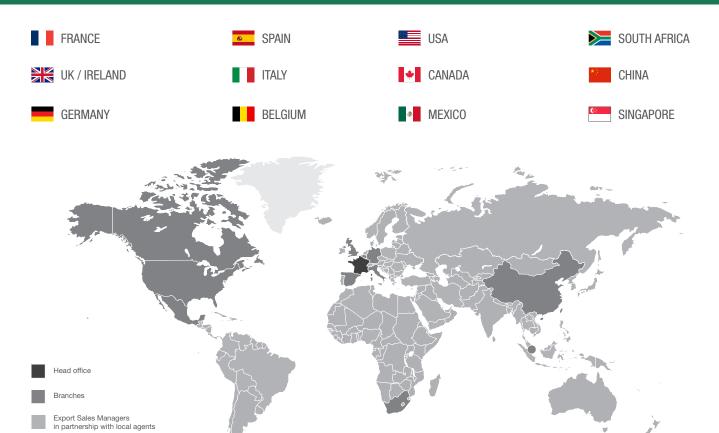









standard-industrie.com



